

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P741947

Luminaire Tested: LD4D10D010-EU4DR200210IC9024-4LBDP1MW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P741947  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D10D010-EU4DR200210IC9024-4LBDP1MW  
Description: 4 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 20° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 851.5 lumens  
Efficiency: N/A  
Efficacy: 72.8 lumens/watt  
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 11.7  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P741947

CATALOG NUMBER: LD4D10D010-EU4DR200210IC9024-4LBDP1MW

### Luminous Intensity Polar Plot

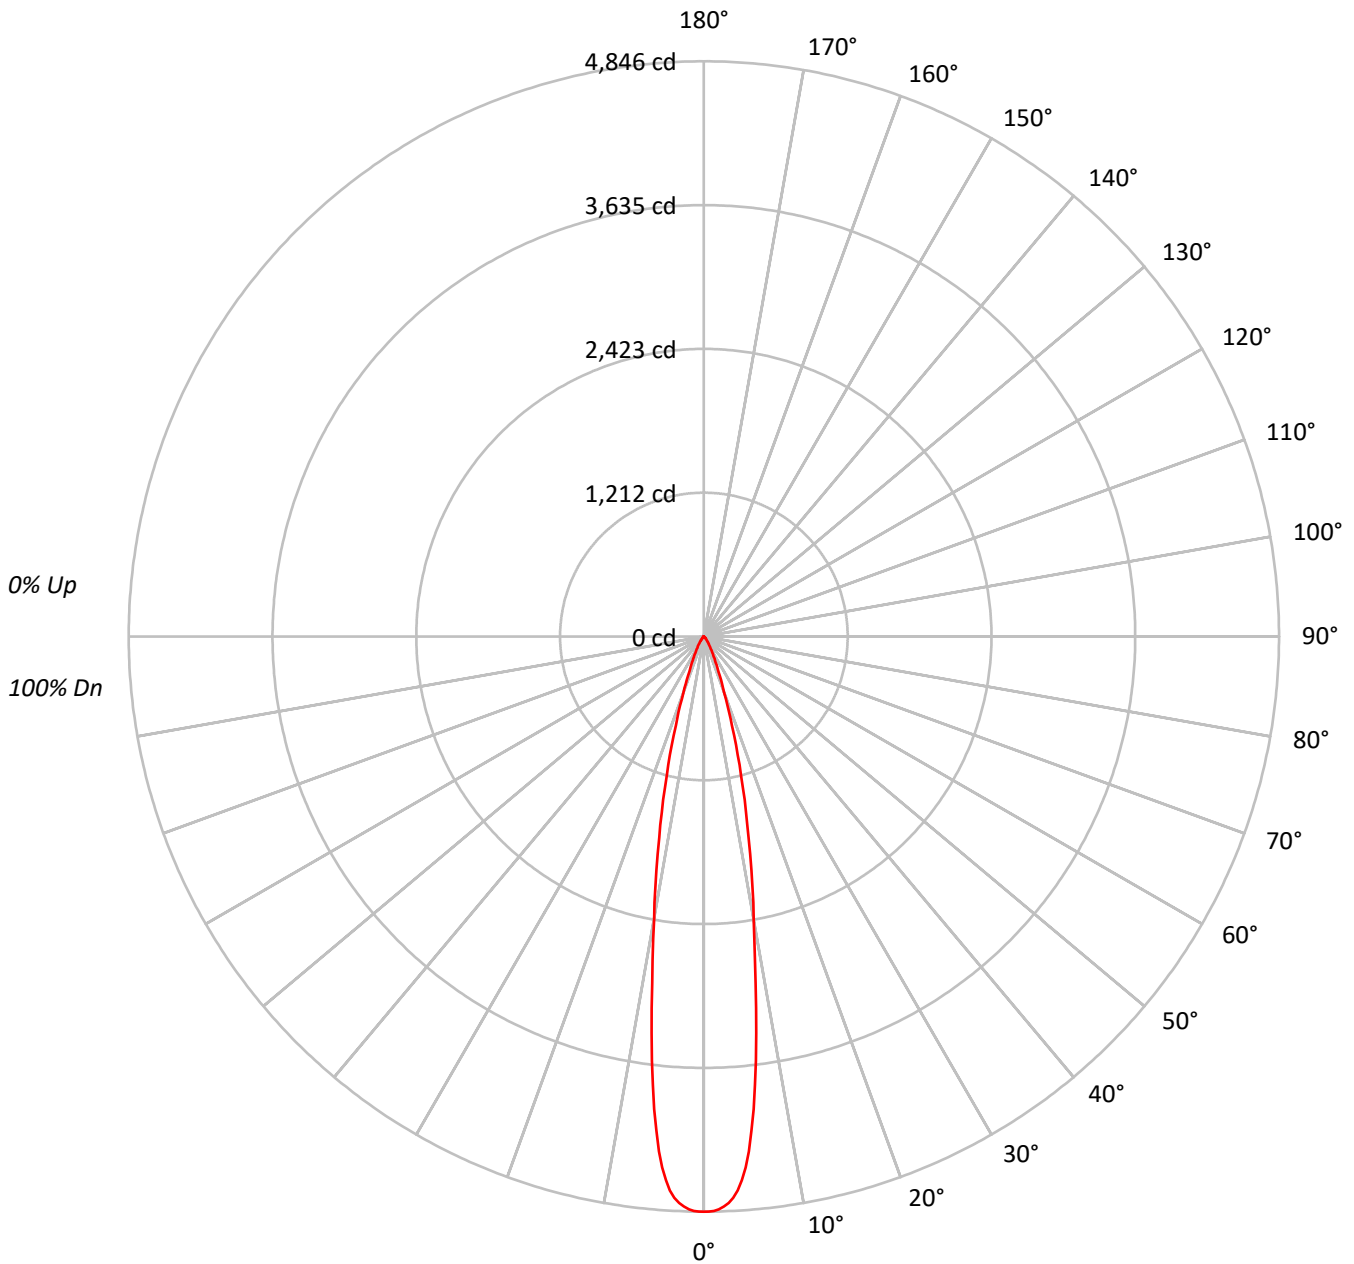



TEST NUMBER: P741947

CATALOG NUMBER: LD4D10D010-EU4DR200210IC9024-4LBDP1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	115	113	111	109	113	111	109	108	107	106	104		103	102	101		100	99	98	97
2	111	108	105	102	109	106	104	101	103	101	99		100	99	97		98	96	95	94
3	108	103	100	97	106	102	99	96	100	97	95		97	95	93		95	93	92	91
4	105	99	96	93	103	98	95	92	96	93	91		95	92	90		93	91	89	88
5	102	96	92	89	100	95	91	89	94	90	88		92	89	87		91	88	86	85
6	99	93	89	86	98	92	88	86	91	87	85		90	87	84		88	86	84	83
7	96	90	86	83	95	89	86	83	88	85	82		87	84	82		86	84	82	81
8	94	87	83	81	93	87	83	80	86	83	80		85	82	80		84	82	80	79
9	91	85	81	78	91	85	81	78	84	80	78		83	80	78		82	80	78	77
10	89	83	79	76	88	82	79	76	82	78	76		81	78	76		81	78	76	75

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	529532
5°	477736
10°	268135
15°	136292
20°	57706
25°	26643
30°	14105
35°	7603
40°	4065
45°	2395
50°	1394
55°	743
60°	481
65°	336
70°	128
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2395 cd/sqm



TEST NUMBER: P741947

CATALOG NUMBER: LD4D10D010-EU4DR200210IC9024-4LBDP1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	345.1	40.5
10°-20°	339.8	39.9
20°-30°	111.0	13.0
30°-40°	37.8	4.4
40°-50°	12.7	1.5
50°-60°	3.8	0.5
60°-70°	1.3	0.2
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	795.8	93.5
0°-40°	833.6	97.9
0°-60°	850.2	99.8
0°-90°	851.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	851.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4846	
5°	4356	345
15°	1205	340
25°	221	111
35°	57	38
45°	16	13
55°	4	4
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P741947

CATALOG NUMBER: LD4D10D010-EU4DR200210IC9024-4LBDP1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	4846.5
0.5°	4846.5
1°	4840.4
1.5°	4828.3
2°	4806.3
2.5°	4777.0
3°	4735.5
3.5°	4677.7
4°	4591.8
4.5°	4487.4
5°	4355.8
5.5°	4182.7
6°	4005.3
6.5°	3802.1
7°	3603.1
7.5°	3370.1
8°	3162.1
8.5°	2952.8
9°	2759.4
9.5°	2582.0
10°	2416.8
12.5°	1735.3
15°	1204.9
17.5°	787.2
20°	496.3
22.5°	321.5
25°	221.0
27.5°	155.4
30°	111.8
32.5°	80.3
35°	57.0
37.5°	39.7
40°	28.5
42.5°	20.7
45°	15.5
47.5°	12.1
50°	8.2
52.5°	5.2
55°	3.9
57.5°	3.0
60°	2.2
62.5°	1.7
65°	1.3



TEST NUMBER: P741947

CATALOG NUMBER: LD4D10D010-EU4DR200210IC9024-4LBDP1MW

**CANDELA DISTRIBUTION (continued):**

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



67.5°		0.9
70°		0.4

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)