

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P742676

Luminaire Tested: LD4D10D010-EU4DR650210IC9030-4LBS1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P742676
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D10D010-EU4DR650210IC9030-4LBS1B
Description: 4 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 855.8 lumens
Efficiency: N/A
Efficacy: 73.1 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 11.7
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P742676
CATALOG NUMBER: LD4D10D010-EU4DR650210IC9030-4LBS1B

Luminous Intensity Polar Plot

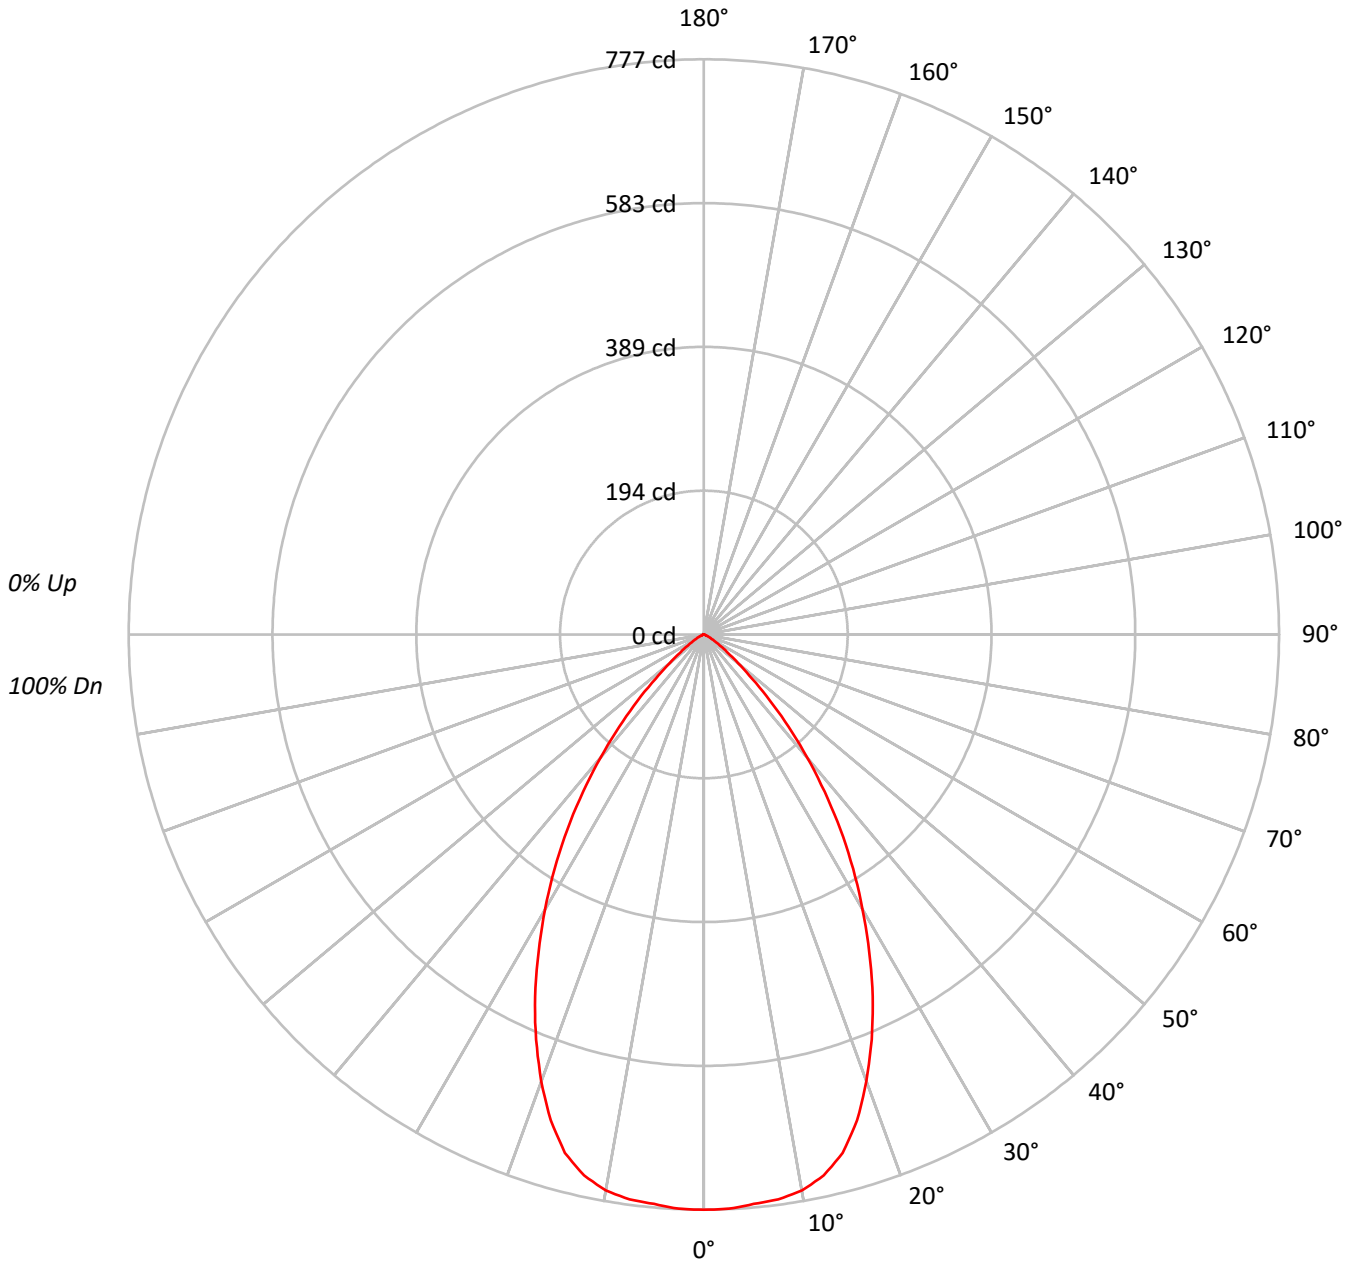



TEST NUMBER: P742676
 CATALOG NUMBER: LD4D10D010-EU4DR650210IC9030-4LBS1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93			93
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85			85
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			78
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72			72
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66			66
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61			61
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56			56
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52			52
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49			49
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46			46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	45386
5°	45272
10°	45232
15°	43836
20°	39908
25°	34779
30°	28925
35°	22915
40°	16544
45°	10448
50°	5443
55°	2892
60°	1519
65°	843
70°	359
75°	384
80°	269
85°	201

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 10448 cd/sqm



TEST NUMBER: P742676

CATALOG NUMBER: LD4D10D010-EU4DR650210IC9030-4LBS1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	73.5	8.6
10°-20°	201.2	23.5
20°-30°	246.0	28.7
30°-40°	199.6	23.3
40°-50°	99.5	11.6
50°-60°	27.7	3.2
60°-70°	6.3	0.7
70°-80°	1.6	0.2
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	520.7	60.8
0°-40°	720.3	84.2
0°-60°	847.4	99.0
0°-90°	855.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	855.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	777	
5°	772	73
15°	725	201
25°	540	246
35°	321	200
45°	126	99
55°	28	28
65°	6	6
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P742676

CATALOG NUMBER: LD4D10D010-EU4DR650210IC9030-4LBS1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	777.1
2.5°	776.5
5°	772.2
7.5°	769.6
10°	762.7
12.5°	748.5
15°	725.0
17.5°	688.2
20°	642.1
22.5°	592.3
25°	539.7
27.5°	483.4
30°	428.9
32.5°	375.1
35°	321.4
37.5°	267.9
40°	217.0
42.5°	169.2
45°	126.5
47.5°	88.2
50°	59.9
52.5°	41.3
55°	28.4
57.5°	19.2
60°	13.0
62.5°	9.0
65°	6.1
67.5°	3.1
70°	2.1
72.5°	1.9
75°	1.7
77.5°	1.1
80°	0.8
82.5°	0.6
85°	0.3
87.5°	0.2
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)