

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P743943

Luminaire Tested: LD4D20D010-EU4DR2015309024-4LBDP1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P743943
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D20D010-EU4DR2015309024-4LBDP1MW
Description: 4 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 20° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1571.1 lumens
Efficiency: N/A
Efficacy: 68.0 lumens/watt
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 23.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P743943

CATALOG NUMBER: LD4D20D010-EU4DR2015309024-4LBDP1MW

Luminous Intensity Polar Plot

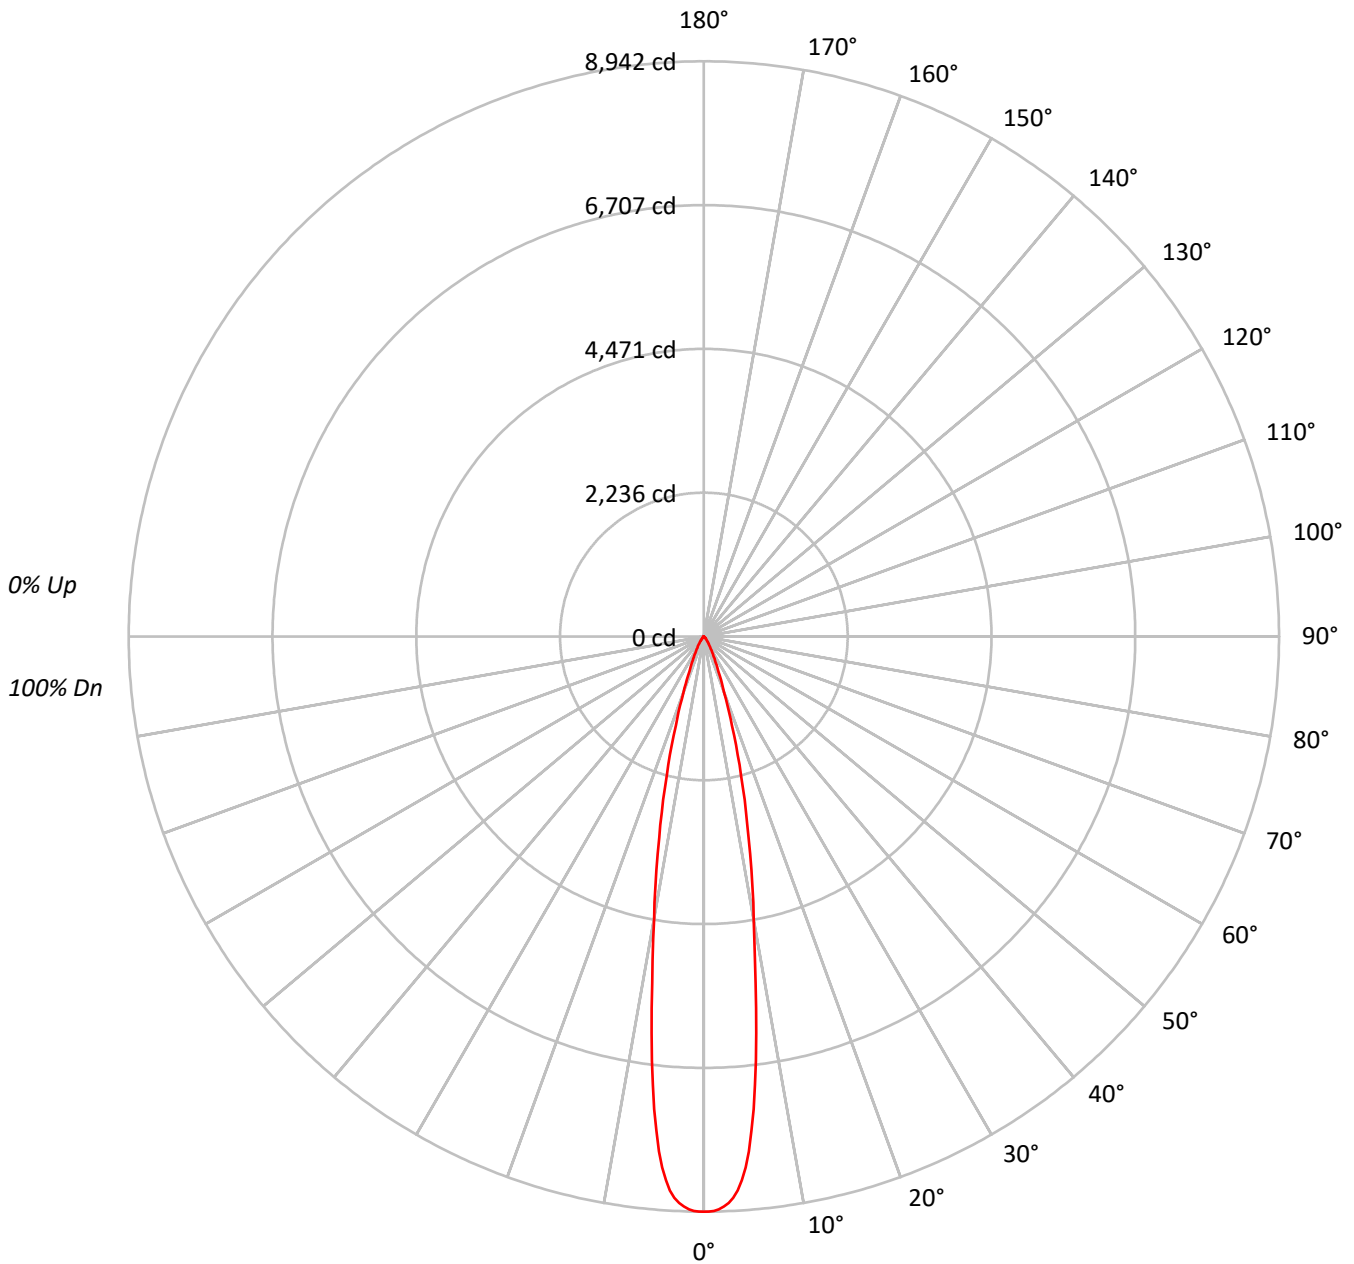



TEST NUMBER: P743943

CATALOG NUMBER: LD4D20D010-EU4DR2015309024-4LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	98	98	97															
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	94	98	96	95															
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	91	98	93	92															
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	88	93	91	89															
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	85	91	88	86															
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	83	88	86	84															
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	81	86	84	82															
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	79	84	82	80															
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	77	82	80	78															
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	75	81	78	76															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	977053
5°	881483
10°	494732
15°	251489
20°	106471
25°	49151
30°	26015
35°	14019
40°	7502
45°	4435
50°	2567
55°	1372
60°	874
65°	620
70°	256
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 4435 cd/sqm



TEST NUMBER: P743943

CATALOG NUMBER: LD4D20D010-EU4DR2015309024-4LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	636.7	40.5
10°-20°	626.9	39.9
20°-30°	204.8	13.0
30°-40°	69.7	4.4
40°-50°	23.5	1.5
50°-60°	7.1	0.5
60°-70°	2.4	0.2
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1468.4	93.5
0°-40°	1538.1	97.9
0°-60°	1568.7	99.8
0°-90°	1571.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1571.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8942	
5°	8037	637
15°	2223	627
25°	408	205
35°	105	70
45°	29	23
55°	7	7
65°	2	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P743943

CATALOG NUMBER: LD4D20D010-EU4DR2015309024-4LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	8942.4
0.5°	8942.4
1°	8931.2
1.5°	8908.9
2°	8868.3
2.5°	8814.2
3°	8737.7
3.5°	8631.0
4°	8472.6
4.5°	8279.9
5°	8037.0
5.5°	7717.7
6°	7390.4
6.5°	7015.3
7°	6648.3
7.5°	6218.3
8°	5834.4
8.5°	5448.2
9°	5091.5
9.5°	4764.2
10°	4459.2
12.5°	3201.9
15°	2223.3
17.5°	1452.4
20°	915.7
22.5°	593.2
25°	407.7
27.5°	286.7
30°	206.2
32.5°	148.1
35°	105.1
37.5°	73.3
40°	52.6
42.5°	38.2
45°	28.7
47.5°	22.3
50°	15.1
52.5°	9.6
55°	7.2
57.5°	5.6
60°	4.0
62.5°	3.2
65°	2.4



TEST NUMBER: P743943

CATALOG NUMBER: LD4D20D010-EU4DR2015309024-4LBDP1MW

CANDELA DISTRIBUTION (continued):

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



67.5°		1.6
70°		0.8

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)