

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P747348

Luminaire Tested: LD4D35BD010-EU4DR6520359040-4LBDP1LI

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P747348
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D35BD010-EU4DR6520359040-4LBDP1LI
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3110.1 lumens
Efficiency: N/A
Efficacy: 101.0 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 30.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P747348

CATALOG NUMBER: LD4D35BD010-EU4DR6520359040-4LBDP1LI

Luminous Intensity Polar Plot

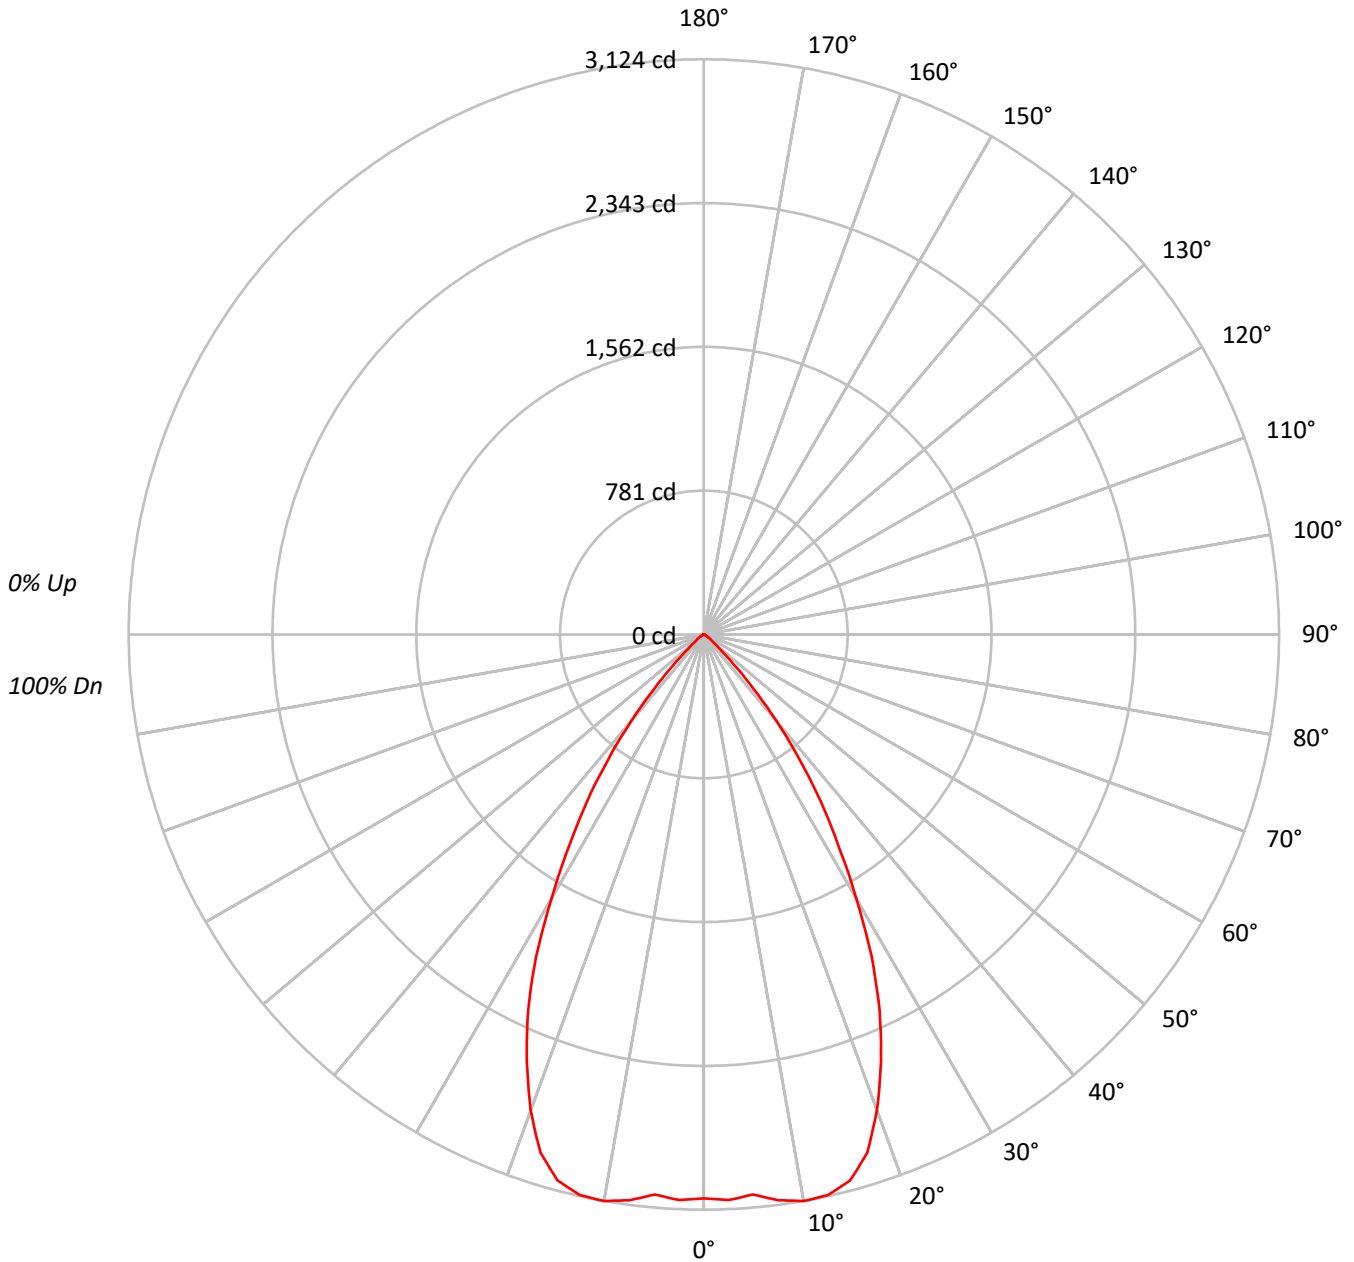



TEST NUMBER: P747348

CATALOG NUMBER: LD4D35BD010-EU4DR6520359040-4LBDP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93		
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87		
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80		
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75		
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69		
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65		
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60		
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57		
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53		
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	334567
5°	334836
10°	346629
15°	347207
20°	319657
25°	272360
30°	208510
35°	147308
40°	86947
45°	35292
50°	12799
55°	7124
60°	4086
65°	2249
70°	2364
75°	1857
80°	1888
85°	1630

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 35292 cd/sqm



TEST NUMBER: P747348

CATALOG NUMBER: LD4D35BD010-EU4DR6520359040-4LBDP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	294.9	9.5
10°-20°	850.5	27.3
20°-30°	1020.5	32.8
30°-40°	685.8	22.1
40°-50°	205.3	6.6
50°-60°	36.2	1.2
60°-70°	10.3	0.3
70°-80°	5.1	0.2
80°-90°	1.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2165.8	69.6
0°-40°	2851.6	91.7
0°-60°	3093.1	99.5
0°-90°	3110.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3110.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3062	
5°	3053	295
15°	3070	851
25°	2259	1020
35°	1104	686
45°	228	205
55°	37	36
65°	9	10
75°	4	5
85°	1	2
90°	0	



TEST NUMBER: P747348

CATALOG NUMBER: LD4D35BD010-EU4DR6520359040-4LBDP1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	3062.1
2.5°	3075.1
5°	3052.9
7.5°	3099.1
10°	3124.3
12.5°	3118.2
15°	3069.5
17.5°	2950.2
20°	2749.2
22.5°	2512.5
25°	2259.2
27.5°	1973.4
30°	1652.7
32.5°	1362.0
35°	1104.4
37.5°	849.8
40°	609.6
42.5°	398.2
45°	228.4
47.5°	121.0
50°	75.3
52.5°	52.2
55°	37.4
57.5°	27.0
60°	18.7
62.5°	12.2
65°	8.7
67.5°	7.8
70°	7.4
72.5°	5.7
75°	4.4
77.5°	3.9
80°	3.0
82.5°	2.2
85°	1.3
87.5°	0.9
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)