

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P748106

Luminaire Tested: LD4D40BD010-EU4DR6540509030-4LBS1LI

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P748106
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D40BD010-EU4DR6540509030-4LBS1LI
Description: 4 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3643.4 lumens
Efficiency: N/A
Efficacy: 103.5 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct


Input Watts (W): 35.2
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P748106
CATALOG NUMBER: LD4D40BD010-EU4DR6540509030-4LBS1LI

Luminous Intensity Polar Plot

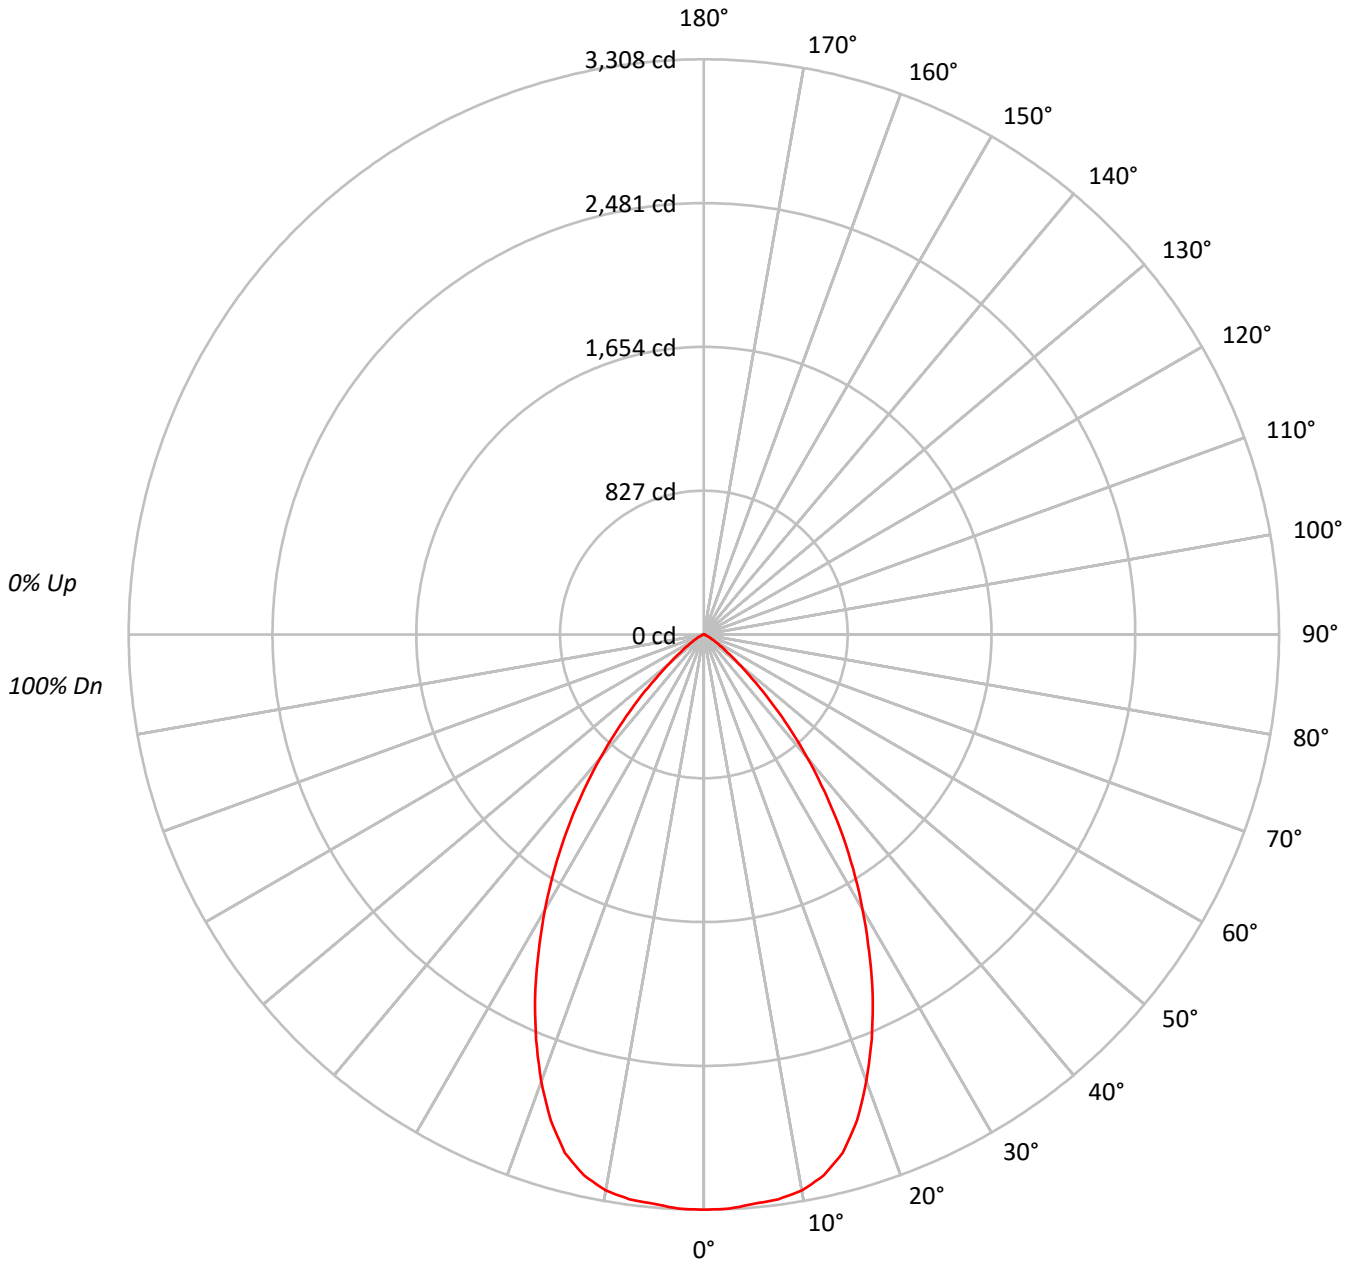



TEST NUMBER: P748106

CATALOG NUMBER: LD4D40BD010-EU4DR6540509030-4LBS1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	110	107	105	111	108	105	103	104	102	100		100	99	97		97	95	94	93
2	107	102	97	94	105	100	96	92	97	93	90		94	91	88		91	89	87	85
3	101	94	88	84	99	92	87	83	90	86	82		87	84	81		85	82	80	78
4	95	87	81	76	93	86	80	76	84	79	75		82	77	74		80	76	73	72
5	90	81	74	70	88	80	74	69	78	73	69		76	72	68		75	71	68	66
6	85	75	69	64	83	74	68	64	73	67	63		71	67	63		70	66	62	61
7	80	70	64	59	79	69	63	59	68	63	59		67	62	58		66	61	58	56
8	76	66	59	55	75	65	59	55	64	58	54		63	58	54		62	57	54	52
9	72	61	55	51	71	61	55	51	60	54	51		59	54	50		58	54	50	49
10	68	58	52	47	67	57	51	47	57	51	47		56	51	47		55	50	47	46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	193206
5°	192719
10°	192551
15°	186617
20°	169893
25°	148048
30°	123137
35°	97564
40°	70416
45°	44486
50°	23188
55°	12321
60°	6471
65°	3565
70°	1503
75°	1647
80°	1144
85°	1005

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 44486 cd/sqm



TEST NUMBER: P748106

CATALOG NUMBER: LD4D40BD010-EU4DR6540509030-4LBS1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	312.8	8.6
10°-20°	856.7	23.5
20°-30°	1047.1	28.7
30°-40°	849.6	23.3
40°-50°	423.4	11.6
50°-60°	118.1	3.2
60°-70°	26.8	0.7
70°-80°	7.0	0.2
80°-90°	1.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2216.7	60.8
0°-40°	3066.3	84.2
0°-60°	3607.7	99.0
0°-90°	3643.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3643.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3308	
5°	3287	313
15°	3086	857
25°	2297	1047
35°	1368	850
45°	539	423
55°	121	118
65°	26	27
75°	7	7
85°	2	2
90°	0	



TEST NUMBER: P748106

CATALOG NUMBER: LD4D40BD010-EU4DR6540509030-4LBS1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	3308.1
2.5°	3305.7
5°	3287.2
7.5°	3276.5
10°	3246.8
12.5°	3186.6
15°	3086.4
17.5°	2929.9
20°	2733.5
22.5°	2521.5
25°	2297.4
27.5°	2057.8
30°	1825.9
32.5°	1596.9
35°	1368.4
37.5°	1140.5
40°	923.6
42.5°	720.4
45°	538.6
47.5°	375.3
50°	255.2
52.5°	176.0
55°	121.0
57.5°	81.7
60°	55.4
62.5°	38.4
65°	25.8
67.5°	13.1
70°	8.8
72.5°	8.3
75°	7.3
77.5°	4.9
80°	3.4
82.5°	2.4
85°	1.5
87.5°	1.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)