

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P748113

Luminaire Tested: LD4D40BD010-EU4DR6540509035-4LBDP1B

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P748113
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D40BD010-EU4DR6540509035-4LBDP1B
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2481.3 lumens
Efficiency: N/A
Efficacy: 70.5 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 35.2
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P748113
CATALOG NUMBER: LD4D40BD010-EU4DR6540509035-4LBDP1B

Luminous Intensity Polar Plot

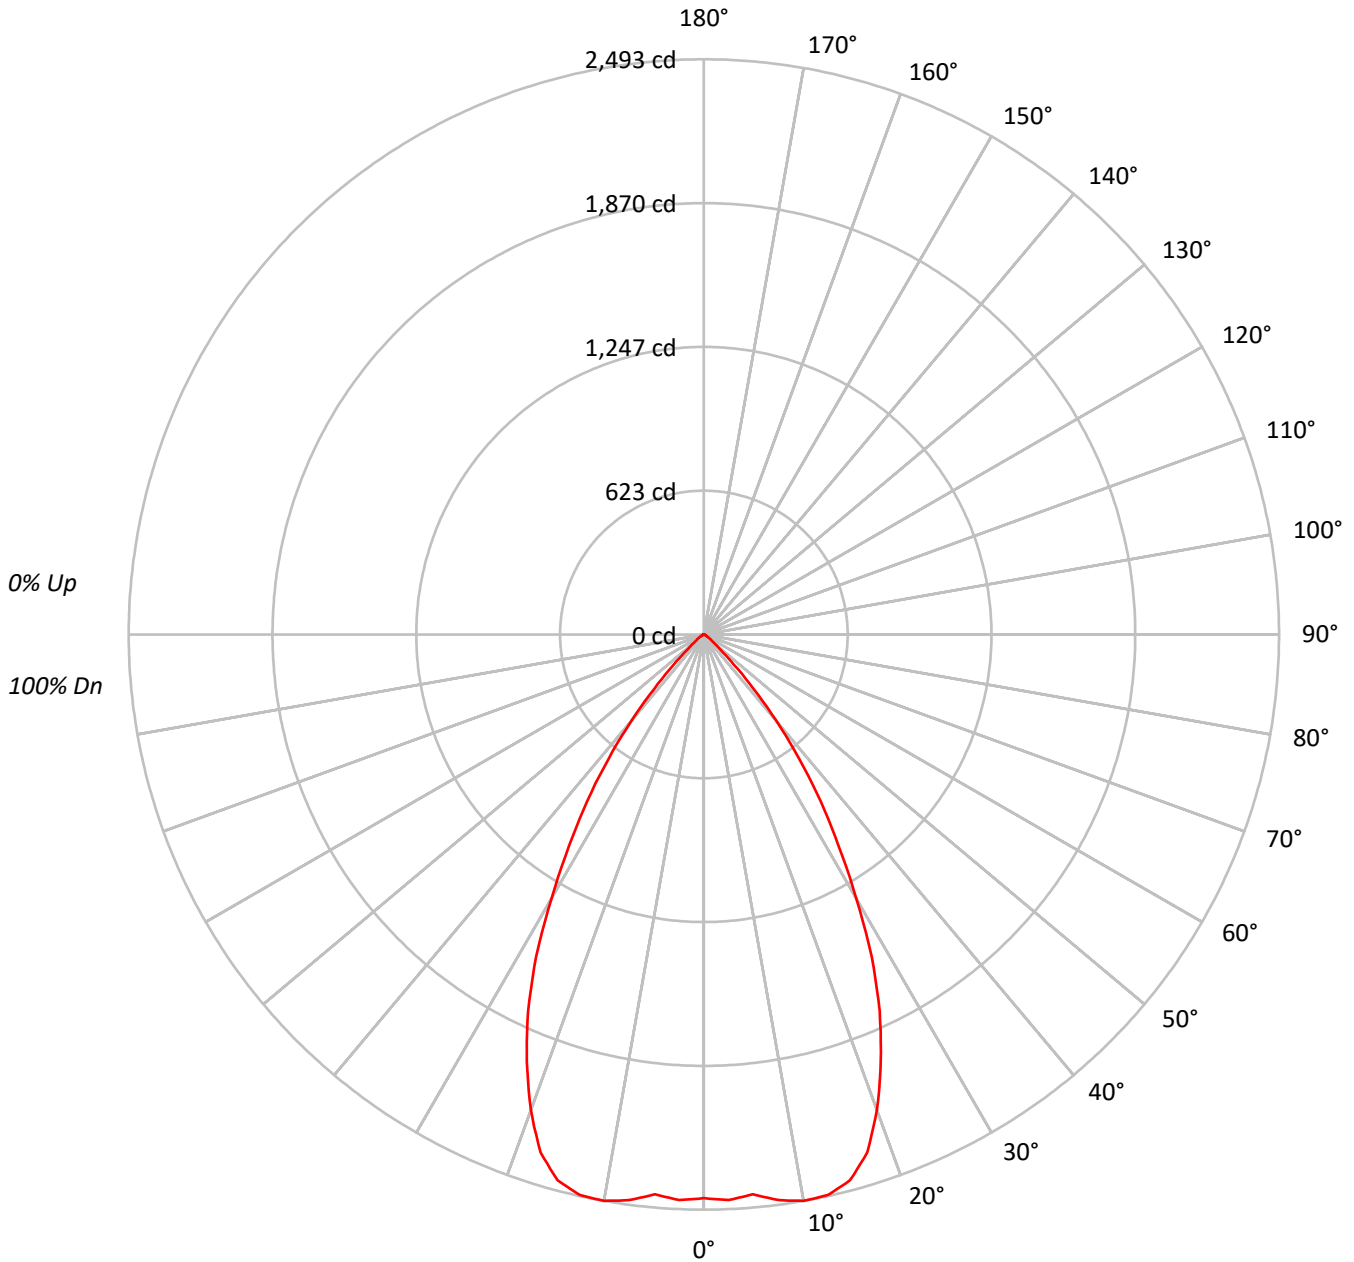



TEST NUMBER: P748113

CATALOG NUMBER: LD4D40BD010-EU4DR6540509035-4LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10		0		
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	266924
5°	267143
10°	276556
15°	277007
20°	255033
25°	217302
30°	166347
35°	117524
40°	69375
45°	28169
50°	10216
55°	5696
60°	3256
65°	1784
70°	1885
75°	1478
80°	1510
85°	1254

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 28169 cd/sqm



TEST NUMBER: P748113

CATALOG NUMBER: LD4D40BD010-EU4DR6540509035-4LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	235.2	9.5
10°-20°	678.6	27.3
20°-30°	814.2	32.8
30°-40°	547.1	22.1
40°-50°	163.8	6.6
50°-60°	28.9	1.2
60°-70°	8.2	0.3
70°-80°	4.0	0.2
80°-90°	1.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1728.0	69.6
0°-40°	2275.1	91.7
0°-60°	2467.8	99.5
0°-90°	2481.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2481.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2443	
5°	2436	235
15°	2449	679
25°	1802	814
35°	881	547
45°	182	164
55°	30	29
65°	7	8
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P748113

CATALOG NUMBER: LD4D40BD010-EU4DR6540509035-4LBDP1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	2443.0
2.5°	2453.4
5°	2435.7
7.5°	2472.5
10°	2492.7
12.5°	2487.8
15°	2448.9
17.5°	2353.8
20°	2193.4
22.5°	2004.6
25°	1802.5
27.5°	1574.4
30°	1318.5
32.5°	1086.6
35°	881.1
37.5°	678.0
40°	486.4
42.5°	317.7
45°	182.3
47.5°	96.5
50°	60.1
52.5°	41.7
55°	29.9
57.5°	21.5
60°	14.9
62.5°	9.7
65°	6.9
67.5°	6.2
70°	5.9
72.5°	4.5
75°	3.5
77.5°	3.1
80°	2.4
82.5°	1.7
85°	1.0
87.5°	0.7
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)