

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P747658

Luminaire Tested: LD4D40BD010-EU4DR3540509040-4LBDP1B

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P747658  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D40BD010-EU4DR3540509040-4LBDP1B  
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 35° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3289.9 lumens  
Efficiency: N/A  
Efficacy: 93.5 lumens/watt  
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 35.2  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P747658  
CATALOG NUMBER: LD4D40BD010-EU4DR3540509040-4LBDP1B

### Luminous Intensity Polar Plot

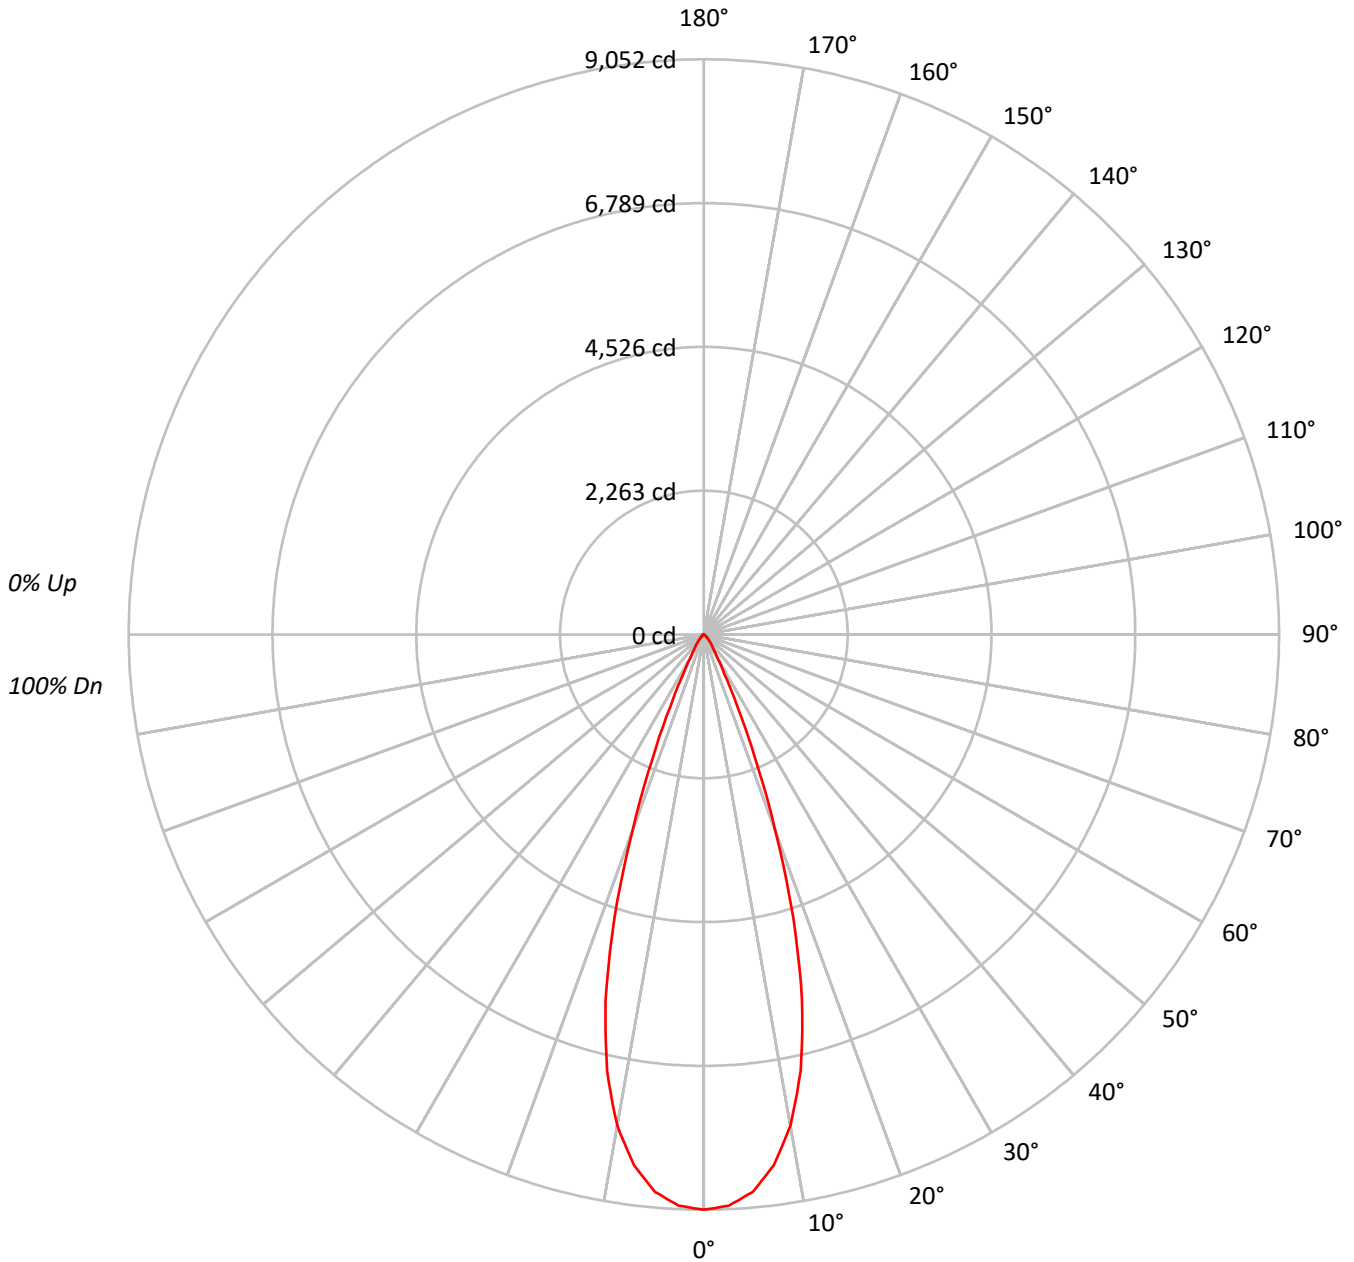



TEST NUMBER: P747658

CATALOG NUMBER: LD4D40BD010-EU4DR3540509040-4LBDP1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96						96													
2	110	106	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92						92													
3	106	101	97	94	105	100	96	93	97	95	92	95	93	91	93	91	89	88						88													
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84						84													
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81						81													
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78						78													
7	93	85	81	78	91	85	80	77	84	80	77	83	79	77	82	79	76	75						75													
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72						72													
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70						70													
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68						68													

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	989050
5°	965814
10°	870451
15°	675614
20°	383200
25°	149079
30°	55613
35°	30491
40°	19925
45°	12130
50°	7717
55°	5448
60°	3999
65°	2172
70°	160
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 12130 cd/sqm



TEST NUMBER: P747658

CATALOG NUMBER: LD4D40BD010-EU4DR3540509040-4LBDP1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	809.9	24.6
10°-20°	1581.2	48.1
20°-30°	644.9	19.6
30°-40°	154.3	4.7
40°-50°	64.3	2.0
50°-60°	26.6	0.8
60°-70°	8.3	0.3
70°-80°	0.2	0.0
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3036.0	92.3
0°-40°	3190.3	97.0
0°-60°	3281.2	99.7
0°-90°	3289.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3289.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	9052	
5°	8806	810
15°	5973	1581
25°	1237	645
35°	229	154
45°	78	64
55°	29	27
65°	8	8
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P747658

CATALOG NUMBER: LD4D40BD010-EU4DR3540509040-4LBDP1B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	9052.2
2.5°	8997.9
5°	8805.9
7.5°	8422.8
10°	7845.7
12.5°	7033.2
15°	5972.8
17.5°	4675.9
20°	3295.7
22.5°	2101.5
25°	1236.6
27.5°	699.0
30°	440.8
32.5°	309.5
35°	228.6
37.5°	176.7
40°	139.7
42.5°	107.6
45°	78.5
47.5°	58.7
50°	45.4
52.5°	36.0
55°	28.6
57.5°	23.2
60°	18.3
62.5°	13.3
65°	8.4
67.5°	3.0
70°	0.5
72.5°	0.5
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.5
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)