

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P740569

Luminaire Tested: LD4D05D010-EU4DR600210IC9030-4LBDP1MW

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P740569  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D05D010-EU4DR600210IC9030-4LBDP1MW  
Description: 4 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 60° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 577.1 lumens  
Efficiency: N/A  
Efficacy: 76.9 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 7.5  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P740569

CATALOG NUMBER: LD4D05D010-EU4DR600210IC9030-4LBDP1MW

### Luminous Intensity Polar Plot

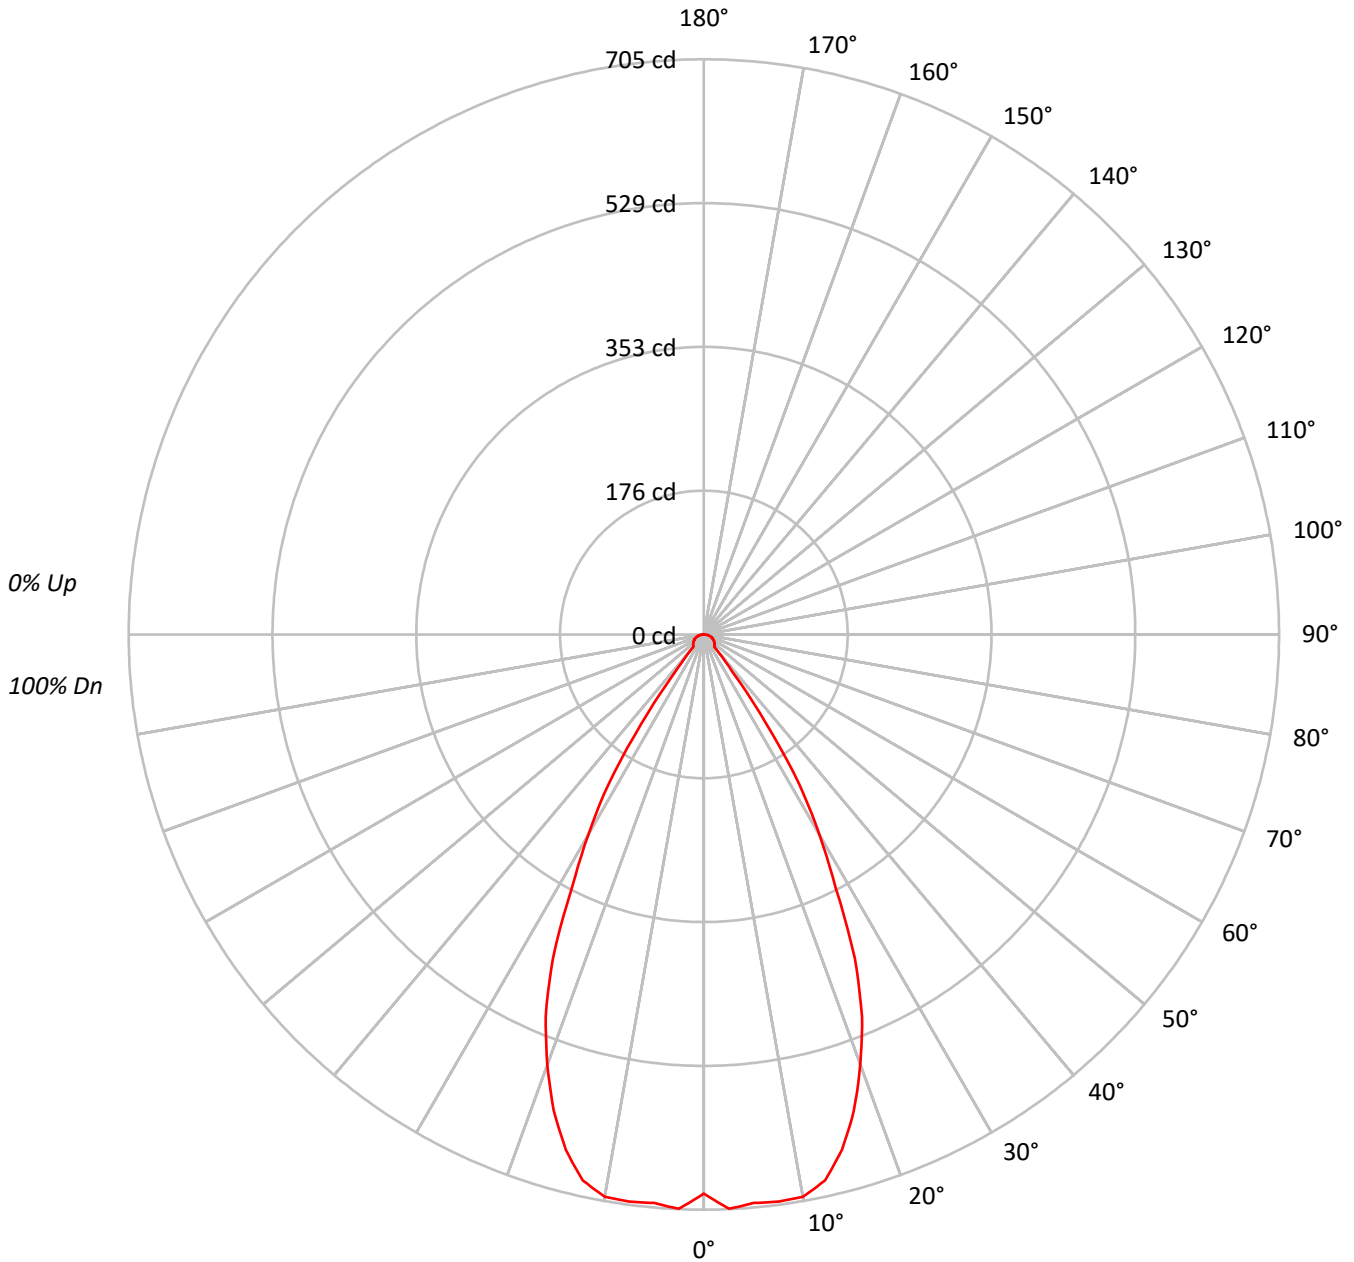



TEST NUMBER: P740569

CATALOG NUMBER: LD4D05D010-EU4DR600210IC9030-4LBDP1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93																			
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86																			
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80																			
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70																			
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66																			
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62																			
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59																			
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55																			
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	74876
5°	76720
10°	77651
15°	73966
20°	65217
25°	52755
30°	35679
35°	17887
40°	2895
45°	2843
50°	2890
55°	2934
60°	3016
65°	3102
70°	3163
75°	3208
80°	3083
85°	2633

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 75°  
 Luminance: 3208 cd/sqm



TEST NUMBER: P740569

CATALOG NUMBER: LD4D05D010-EU4DR600210IC9030-4LBDP1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	66.9	11.6
10°-20°	180.9	31.3
20°-30°	194.6	33.7
30°-40°	84.6	14.7
40°-50°	14.2	2.5
50°-60°	13.8	2.4
60°-70°	11.8	2.0
70°-80°	7.9	1.4
80°-90°	2.4	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	442.4	76.7
0°-40°	527.0	91.3
0°-60°	555.0	96.2
0°-90°	577.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	577.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	685	
5°	700	67
15°	654	181
25°	438	195
35°	134	85
45°	18	14
55°	15	14
65°	12	12
75°	8	8
85°	2	2
90°	0	



TEST NUMBER: P740569

CATALOG NUMBER: LD4D05D010-EU4DR600210IC9030-4LBDP1MW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	685.3
2.5°	704.6
5°	699.5
7.5°	701.1
10°	699.9
12.5°	685.4
15°	653.9
17.5°	611.7
20°	560.9
22.5°	506.6
25°	437.6
27.5°	350.0
30°	282.8
32.5°	218.0
35°	134.1
37.5°	57.4
40°	20.3
42.5°	18.7
45°	18.4
47.5°	17.8
50°	17.0
52.5°	16.2
55°	15.4
57.5°	14.6
60°	13.8
62.5°	12.9
65°	12.0
67.5°	10.9
70°	9.9
72.5°	8.8
75°	7.6
77.5°	6.2
80°	4.9
82.5°	3.5
85°	2.1
87.5°	0.7
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)