

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P749960

Luminaire Tested: LD4D55D010-EU4DR3555659027-4LBDP1H

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P749960  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D55D010-EU4DR3555659027-4LBDP1H  
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 35° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5072.9 lumens  
Efficiency: N/A  
Efficacy: 87.2 lumens/watt  
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 58.2  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P749960

CATALOG NUMBER: LD4D55D010-EU4DR3555659027-4LBDP1H

### Luminous Intensity Polar Plot

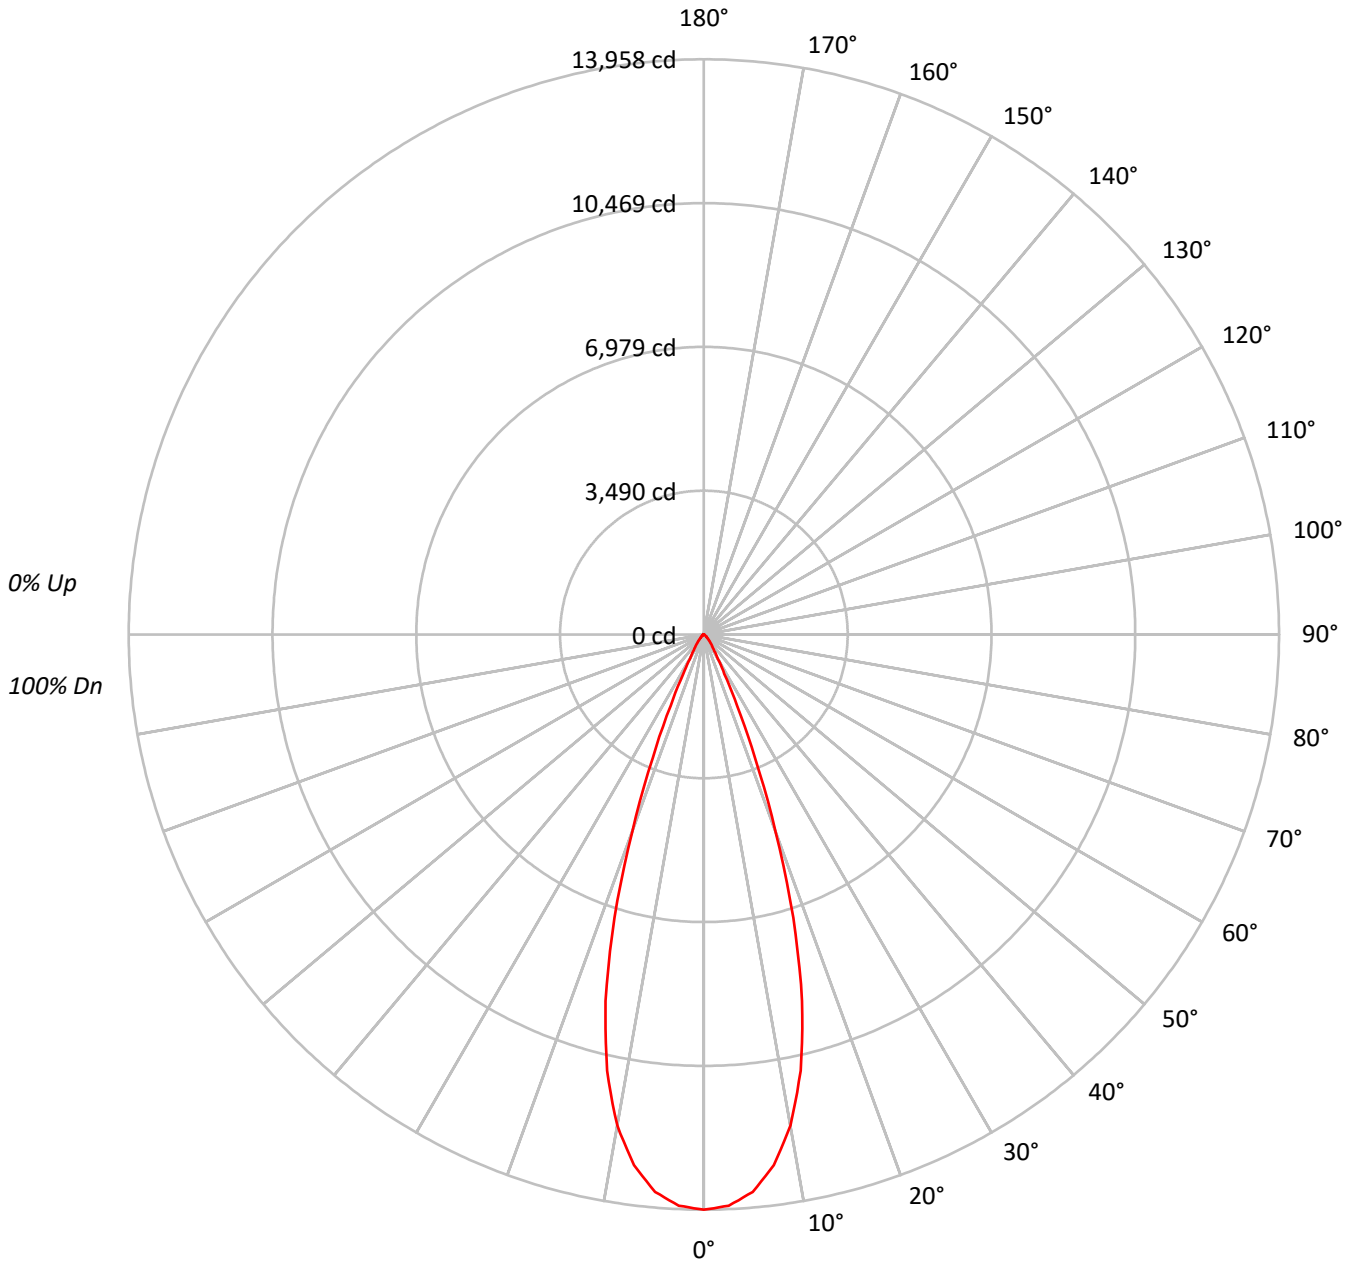



TEST NUMBER: P749960

CATALOG NUMBER: LD4D55D010-EU4DR3555659027-4LBDP1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96																			
2	110	106	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92																			
3	106	101	97	94	105	100	96	93	97	95	92	95	93	91	93	91	89	88																			
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84																			
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81																			
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78																			
7	93	85	81	78	91	85	80	77	84	80	77	83	79	77	82	79	76	75																			
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72																			
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70																			
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1525062
5°	1489220
10°	1342184
15°	1041744
20°	590864
25°	229876
30°	85753
35°	47004
40°	30722
45°	18697
50°	11899
55°	8401
60°	6162
65°	3335
70°	256
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 18697 cd/sqm



TEST NUMBER: P749960

CATALOG NUMBER: LD4D55D010-EU4DR3555659027-4LBDP1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1248.8	24.6
10°-20°	2438.2	48.1
20°-30°	994.4	19.6
30°-40°	238.0	4.7
40°-50°	99.2	2.0
50°-60°	41.1	0.8
60°-70°	12.9	0.3
70°-80°	0.3	0.0
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4681.3	92.3
0°-40°	4919.3	97.0
0°-60°	5059.5	99.7
0°-90°	5072.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5072.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	13958	
5°	13578	###
15°	9210	2438
25°	1907	994
35°	352	238
45°	121	99
55°	44	41
65°	13	13
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P749960

CATALOG NUMBER: LD4D55D010-EU4DR3555659027-4LBDP1H

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	13958.0
2.5°	13874.2
5°	13578.1
7.5°	12987.4
10°	12097.6
12.5°	10844.7
15°	9209.6
17.5°	7210.0
20°	5081.7
22.5°	3240.4
25°	1906.8
27.5°	1077.8
30°	679.7
32.5°	477.3
35°	352.4
37.5°	272.5
40°	215.4
42.5°	165.9
45°	121.0
47.5°	90.6
50°	70.0
52.5°	55.6
55°	44.1
57.5°	35.8
60°	28.2
62.5°	20.6
65°	12.9
67.5°	4.6
70°	0.8
72.5°	0.8
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.8
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)