

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P750349

Luminaire Tested: LD4D55D010-EU4DR6055659027-4LBDP1B

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P750349  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D55D010-EU4DR6055659027-4LBDP1B  
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 60° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4194.2 lumens  
Efficiency: N/A  
Efficacy: 72.1 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 58.2  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P750349  
CATALOG NUMBER: LD4D55D010-EU4DR6055659027-4LBDP1B

### Luminous Intensity Polar Plot

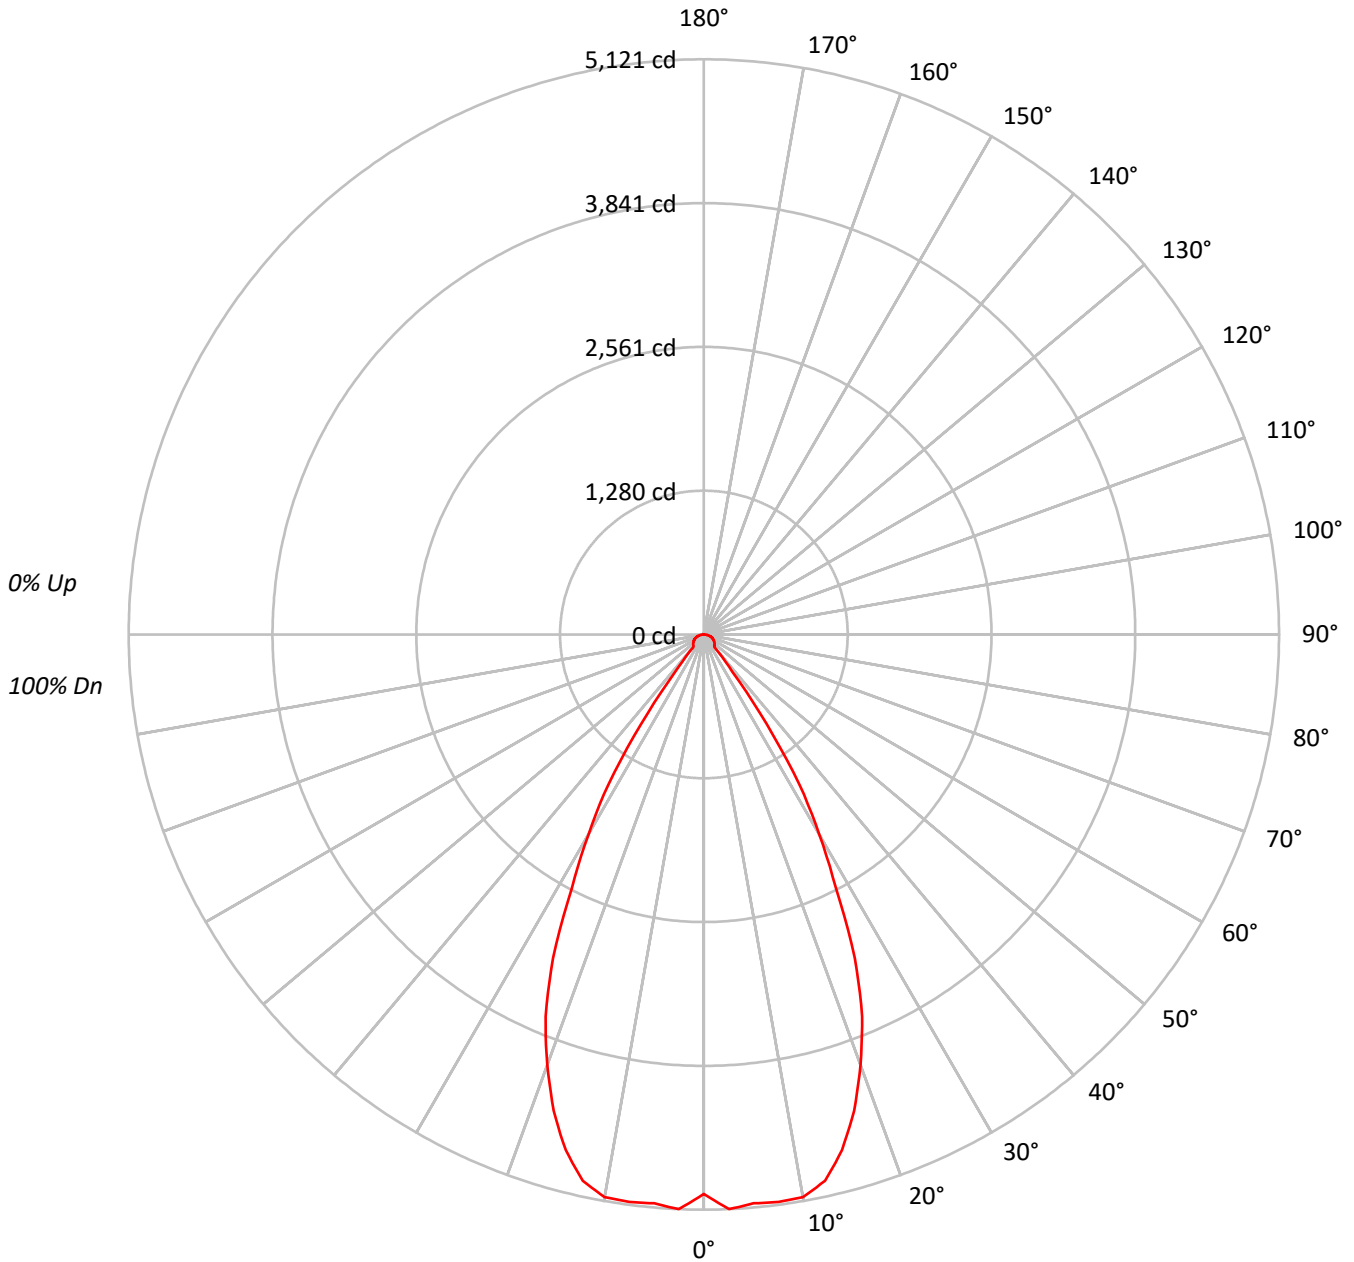



TEST NUMBER: P750349

CATALOG NUMBER: LD4D55D010-EU4DR6055659027-4LBDP1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	93	93
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86	86	86	86
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80	80	80	80
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75	75	75	75
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70	70	70	70
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66	66	66	66
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62	62	62	62
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59	59	59	59
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55	55	55	55
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53	53	53	53

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	544239
5°	557625
10°	564350
15°	537625
20°	474021
25°	383404
30°	259342
35°	129955
40°	21081
45°	20628
50°	21043
55°	21354
60°	21961
65°	22467
70°	23001
75°	23261
80°	22463
85°	18679

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 75°  
 Luminance: 23261 cd/sqm



TEST NUMBER: P750349

CATALOG NUMBER: LD4D55D010-EU4DR6055659027-4LBDP1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	485.9	11.6
10°-20°	1314.7	31.3
20°-30°	1414.5	33.7
30°-40°	614.8	14.7
40°-50°	103.3	2.5
50°-60°	100.4	2.4
60°-70°	85.9	2.0
70°-80°	57.5	1.4
80°-90°	17.2	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3215.1	76.7
0°-40°	3829.9	91.3
0°-60°	4033.6	96.2
0°-90°	4194.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4194.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4981	
5°	5084	486
15°	4753	1315
25°	3180	1414
35°	974	615
45°	134	103
55°	112	100
65°	87	86
75°	55	57
85°	15	17
90°	0	



TEST NUMBER: P750349

CATALOG NUMBER: LD4D55D010-EU4DR6055659027-4LBDP1B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	4981.1
2.5°	5121.1
5°	5084.2
7.5°	5095.8
10°	5086.7
12.5°	4981.7
15°	4752.9
17.5°	4445.6
20°	4076.8
22.5°	3682.0
25°	3180.3
27.5°	2543.7
30°	2055.6
32.5°	1584.3
35°	974.3
37.5°	416.8
40°	147.8
42.5°	136.1
45°	133.5
47.5°	129.0
50°	123.8
52.5°	118.0
55°	112.1
57.5°	106.3
60°	100.5
62.5°	94.0
65°	86.9
67.5°	79.7
70°	72.0
72.5°	63.5
75°	55.1
77.5°	45.4
80°	35.7
82.5°	25.3
85°	14.9
87.5°	5.2
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)