

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P741453

Luminaire Tested: LD4D08D010-EU4DR500210IC9040-4LBDP1MW

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P741453
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D08D010-EU4DR500210IC9040-4LBDP1MW
Description: 4 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 50° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 800.1 lumens
Efficiency: N/A
Efficacy: 89.9 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 8.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P741453

CATALOG NUMBER: LD4D08D010-EU4DR500210IC9040-4LBDP1MW

Luminous Intensity Polar Plot

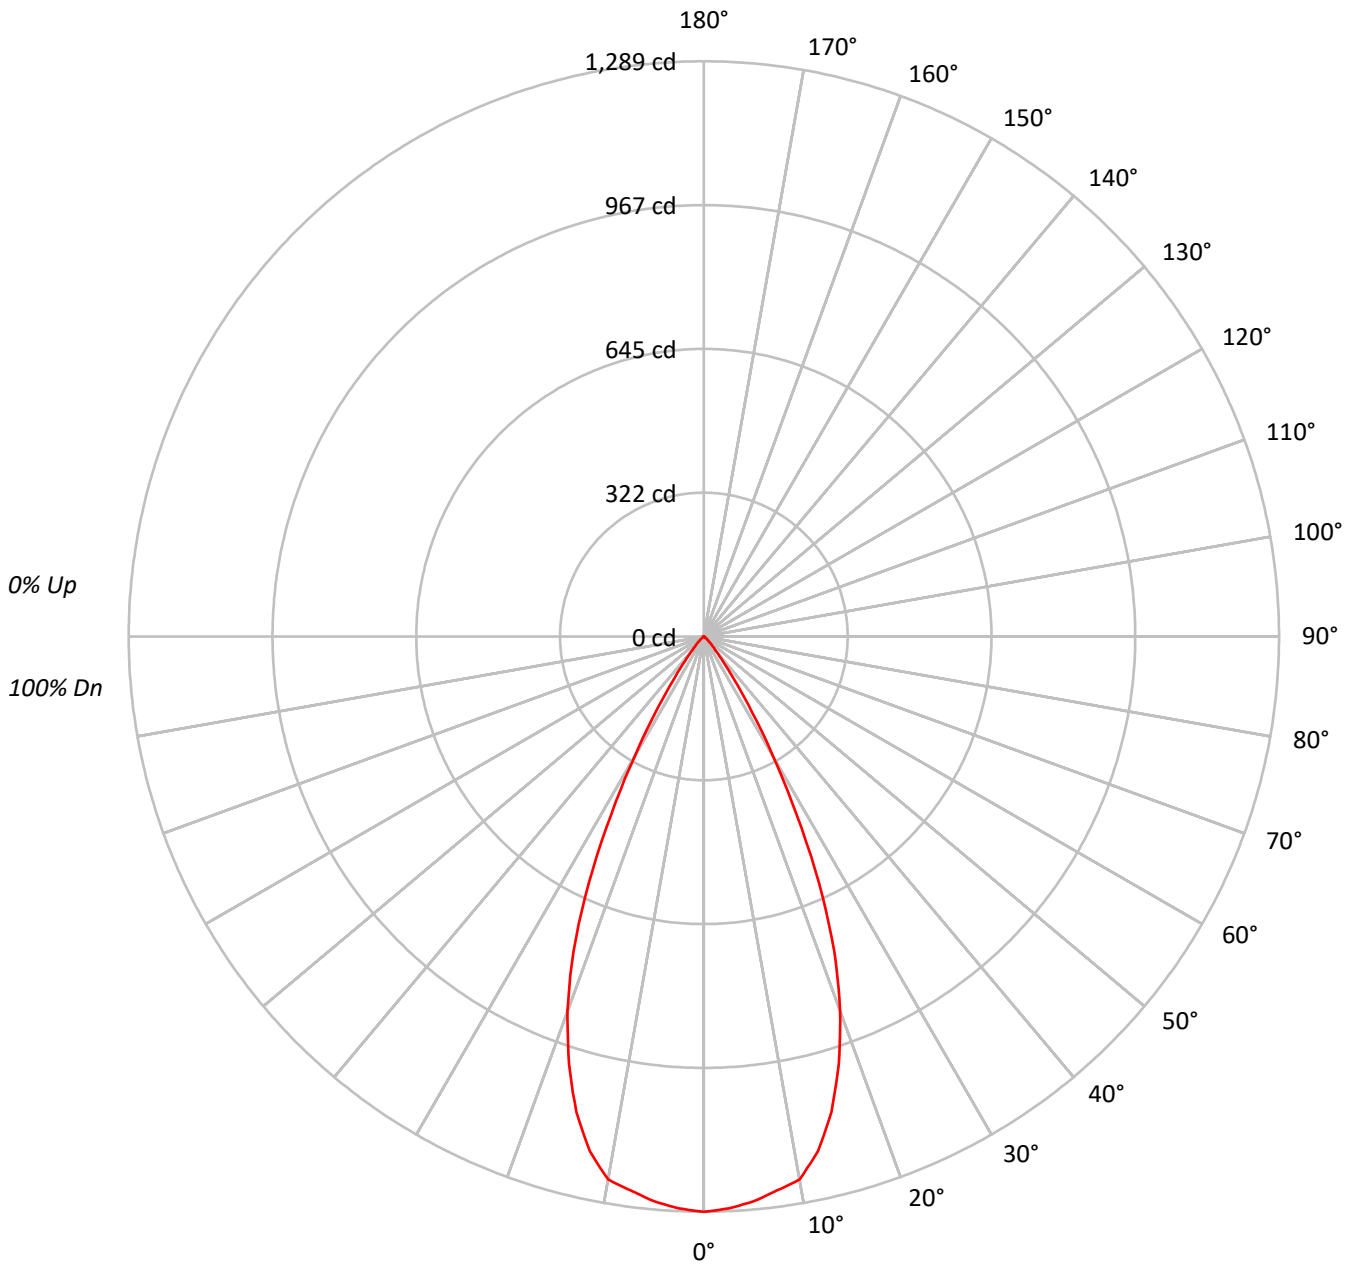



TEST NUMBER: P741453

CATALOG NUMBER: LD4D08D010-EU4DR500210IC9040-4LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	112	109	107	112	110	108	106	106	104	102	102	101	99	98	97	97	95
2	109	105	101	98	107	103	100	97	100	98	95	97	95	93	95	93	91	90
3	105	99	95	91	103	98	94	90	95	92	89	93	90	88	91	88	86	85
4	100	94	89	85	99	93	88	85	90	87	84	89	85	83	87	84	82	80
5	96	89	84	80	95	88	83	79	86	82	79	85	81	78	83	80	77	76
6	92	84	79	75	91	83	79	75	82	78	74	81	77	74	79	76	74	72
7	88	80	75	71	87	79	74	71	78	74	71	77	73	70	76	73	70	69
8	85	76	71	67	84	76	71	67	75	70	67	74	70	67	73	69	66	65
9	81	73	68	64	80	72	67	64	71	67	64	71	67	64	70	66	63	62
10	78	70	64	61	77	69	64	61	68	64	61	68	64	61	67	63	60	59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	140870
5°	139390
10°	137085
15°	124834
20°	103867
25°	73732
30°	39022
35°	15899
40°	5905
45°	2704
50°	1105
55°	571
60°	284
65°	78
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2704 cd/sqm



TEST NUMBER: P741453

CATALOG NUMBER: LD4D08D010-EU4DR500210IC9040-4LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	120.1	15.0
10°-20°	303.6	37.9
20°-30°	272.7	34.1
30°-40°	85.4	10.7
40°-50°	14.9	1.9
50°-60°	3.0	0.4
60°-70°	0.4	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	696.4	87.0
0°-40°	781.7	97.7
0°-60°	799.7	99.9
0°-90°	800.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	800.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1289	
5°	1271	120
15°	1104	304
25°	612	273
35°	119	85
45°	18	15
55°	3	3
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P741453

CATALOG NUMBER: LD4D08D010-EU4DR500210IC9040-4LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	1289.3
2.5°	1282.8
5°	1270.9
7.5°	1252.6
10°	1235.6
12.5°	1181.3
15°	1103.6
17.5°	1004.9
20°	893.3
22.5°	764.3
25°	611.6
27.5°	449.7
30°	309.3
32.5°	201.4
35°	119.2
37.5°	68.5
40°	41.4
42.5°	26.9
45°	17.5
47.5°	10.7
50°	6.5
52.5°	4.5
55°	3.0
57.5°	2.1
60°	1.3
62.5°	0.7
65°	0.3
67.5°	0.1
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)