

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P741152

Luminaire Tested: LD4D08D010-EU4DR300210IC9050-4LBDP1H

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P741152  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D08D010-EU4DR300210IC9050-4LBDP1H  
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 30° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 782.6 lumens  
Efficiency: N/A  
Efficacy: 87.9 lumens/watt  
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49  
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')  
CIE Type: Direct

Input Watts (W): 8.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P741152

CATALOG NUMBER: LD4D08D010-EU4DR300210IC9050-4LBDP1H

### Luminous Intensity Polar Plot

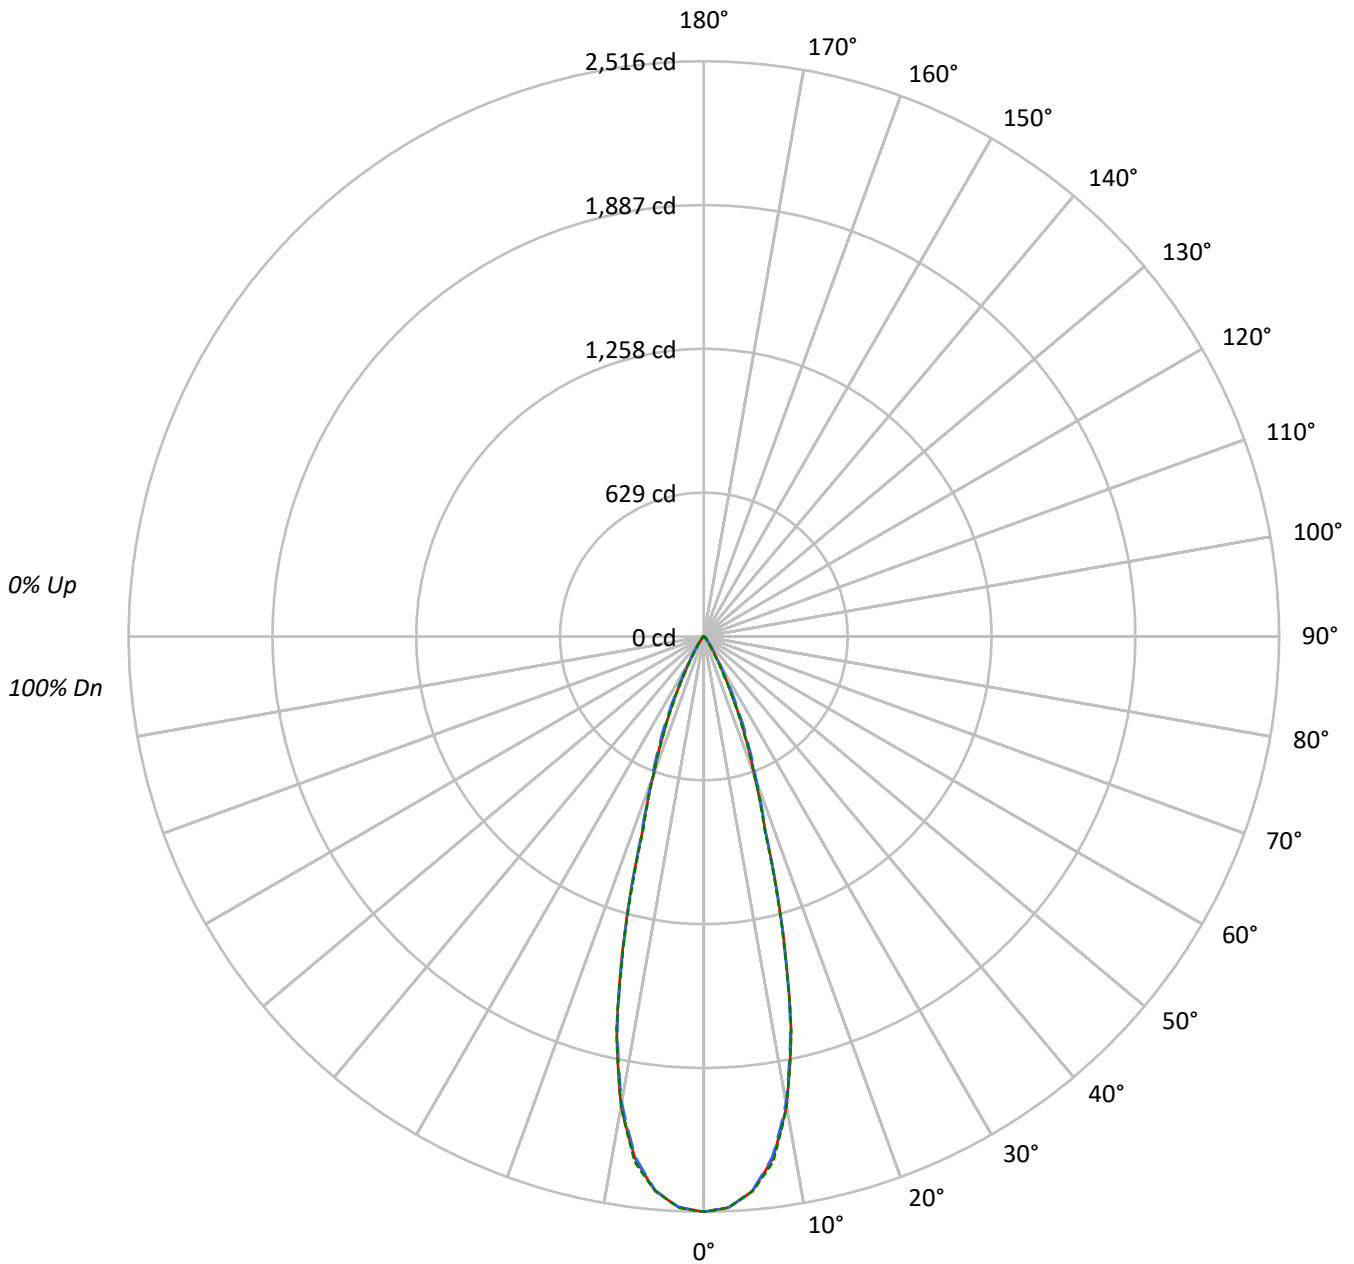



TEST NUMBER: P741152

CATALOG NUMBER: LD4D08D010-EU4DR300210IC9050-4LBDP1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	87	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	192621	192621	192621
5°	187087	186872	187095
10°	162047	160905	162008
15°	105727	105156	104633
20°	52572	54543	52506
25°	26485	29864	25945
30°	10606	11552	9236
35°	4924	4709	3943
40°	2128	2358	1998
45°	1505	1862	1515
50°	512	1346	548
55°	294	560	307
60°	214	245	214
65°	127	127	127
70°	67	45	67
75°	0	30	0
80°	0	0	0
85°	0	0	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 22.5°

Vertical Angle: 45°

Luminance: 1862 cd/sqm



TEST NUMBER: P741152

CATALOG NUMBER: LD4D08D010-EU4DR300210IC9050-4LBDP1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	221.3	28.3
10°-20°	356.4	45.5
20°-30°	154.0	19.7
30°-40°	35.1	4.5
40°-50°	12.1	1.5
50°-60°	2.9	0.4
60°-70°	0.7	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	731.7	93.5
0°-40°	766.8	98.0
0°-60°	781.7	99.9
0°-90°	782.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	782.6	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2516	2516	2516	2516	2516	
5°	2435	2433	2432	2437	2435	221
15°	1334	1318	1327	1323	1320	357
25°	314	325	354	317	307	150
35°	53	54	50	50	42	36
45°	14	17	17	17	14	10
55°	2	2	4	2	2	2
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P741152

CATALOG NUMBER: LD4D08D010-EU4DR300210IC9050-4LBDP1H

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2516.5	2516.5	2516.5	2516.5	2516.5
2.5°	2499.8	2498.0	2499.0	2500.2	2500.8
5°	2434.9	2432.6	2432.1	2437.1	2435.0
7.5°	2304.1	2300.7	2295.6	2307.2	2317.9
10°	2084.9	2081.2	2070.2	2075.6	2084.4
12.5°	1761.3	1749.3	1749.1	1766.4	1764.1
15°	1334.2	1318.1	1327.0	1322.7	1320.4
17.5°	897.2	891.1	902.9	899.3	883.9
20°	645.4	647.0	669.6	658.3	644.6
22.5°	471.0	476.8	503.6	474.3	463.6
25°	313.6	325.4	353.6	317.1	307.2
27.5°	192.9	198.3	226.8	190.4	184.9
30°	120.0	117.2	130.7	112.2	104.5
32.5°	78.7	75.2	79.6	71.4	65.3
35°	52.7	53.7	50.4	50.0	42.2
37.5°	32.9	37.8	33.3	35.6	27.2
40°	21.3	27.4	23.6	26.1	20.0
42.5°	17.4	21.1	19.4	20.6	17.8
45°	13.9	17.2	17.2	17.2	14.0
47.5°	7.7	11.5	14.7	11.7	8.1
50°	4.3	5.8	11.3	6.1	4.6
52.5°	3.0	3.3	7.8	3.4	3.1
55°	2.2	2.3	4.2	2.5	2.3
57.5°	1.7	1.8	2.2	1.8	1.7
60°	1.4	1.4	1.6	1.5	1.4
62.5°	1.0	1.0	1.1	1.0	1.0
65°	0.7	0.7	0.7	0.7	0.7
67.5°	0.3	0.5	0.5	0.5	0.5
70°	0.3	0.2	0.2	0.2	0.3
72.5°	0.2	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report







— 0°-180°    - - 45°-225°    - - - 90°-270°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)