

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P744679

Luminaire Tested: LD4D20D010-EU4DR6520359035-4LBCSSQMMS

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P744679
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D20D010-EU4DR6520359035-4LBCSSQMMS
Description: 4 INCH SQAURE SHALLOW CAST MATTE METALLIC SILVER TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1712.9 lumens
Efficiency: N/A
Efficacy: 74.2 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 23.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P744679

CATALOG NUMBER: LD4D20D010-EU4DR6520359035-4LBCSSQMMS

Luminous Intensity Polar Plot

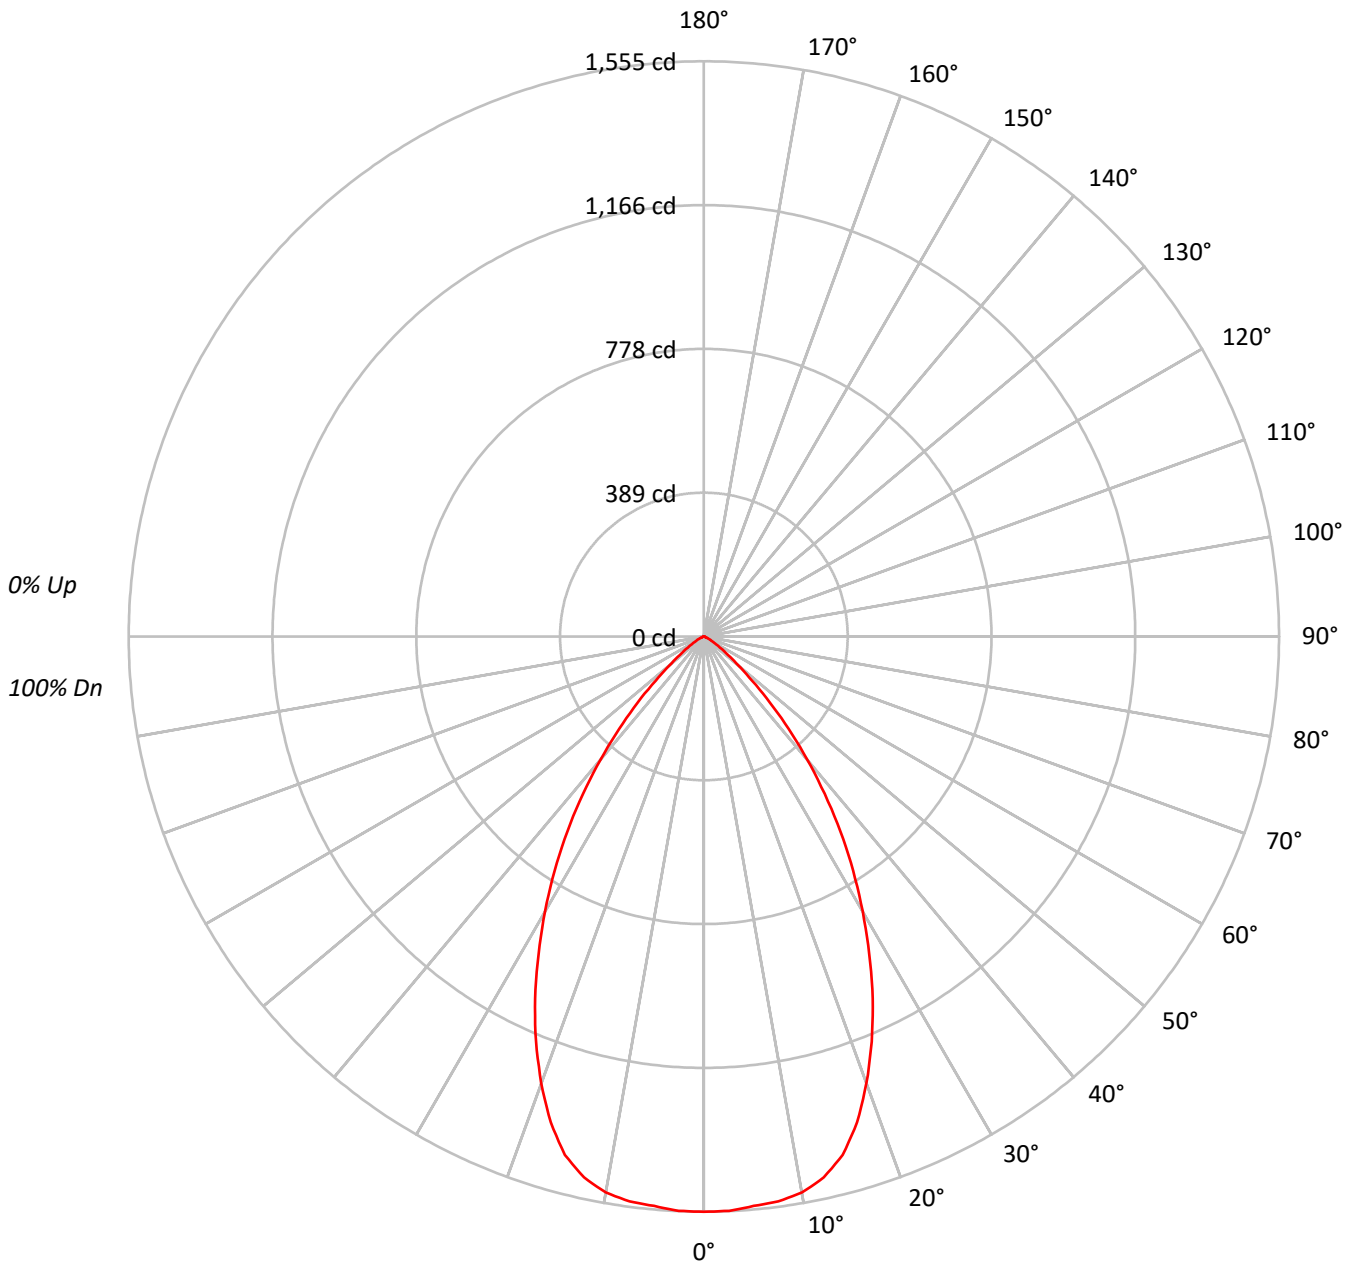



TEST NUMBER: P744679

CATALOG NUMBER: LD4D20D010-EU4DR6520359035-4LBCSSQMMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93			93																
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85			85																
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			78																
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72			72																
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66			66																
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61			61																
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56			56																
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52			52																
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49			49																
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46			46																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	90836
5°	90608
10°	90529
15°	87740
20°	79878
25°	69603
30°	57896
35°	45873
40°	33104
45°	20913
50°	10903
55°	5794
60°	3049
65°	1672
70°	700
75°	767
80°	538
85°	469

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 20913 cd/sqm



TEST NUMBER: P744679

CATALOG NUMBER: LD4D20D010-EU4DR6520359035-4LBCSSQMMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	147.1	8.6
10°-20°	402.8	23.5
20°-30°	492.3	28.7
30°-40°	399.5	23.3
40°-50°	199.1	11.6
50°-60°	55.5	3.2
60°-70°	12.6	0.7
70°-80°	3.3	0.2
80°-90°	0.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1042.2	60.8
0°-40°	1441.6	84.2
0°-60°	1696.2	99.0
0°-90°	1712.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1712.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1555	
5°	1546	147
15°	1451	403
25°	1080	492
35°	643	399
45°	253	199
55°	57	56
65°	12	13
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P744679

CATALOG NUMBER: LD4D20D010-EU4DR6520359035-4LBCSSQMMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	1555.3
2.5°	1554.2
5°	1545.5
7.5°	1540.4
10°	1526.5
12.5°	1498.2
15°	1451.1
17.5°	1377.5
20°	1285.2
22.5°	1185.5
25°	1080.1
27.5°	967.5
30°	858.5
32.5°	750.8
35°	643.4
37.5°	536.2
40°	434.2
42.5°	338.7
45°	253.2
47.5°	176.5
50°	120.0
52.5°	82.7
55°	56.9
57.5°	38.4
60°	26.1
62.5°	18.0
65°	12.1
67.5°	6.2
70°	4.1
72.5°	3.9
75°	3.4
77.5°	2.3
80°	1.6
82.5°	1.1
85°	0.7
87.5°	0.5
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)