

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P739303

Luminaire Tested: LD4D02D010-EU4DR450210IC9027-4LBCSSQMMS

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P739303  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D02D010-EU4DR450210IC9027-4LBCSSQMMS  
Description: 4 INCH SQAURE SHALLOW CAST MATTE METALLIC SILVER TRIM, WITH 45° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 331.5 lumens  
Efficiency: N/A  
Efficacy: 65.0 lumens/watt  
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 5.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P739303  
CATALOG NUMBER: LD4D02D010-EU4DR450210IC9027-4LBCSSQMMS

### Luminous Intensity Polar Plot

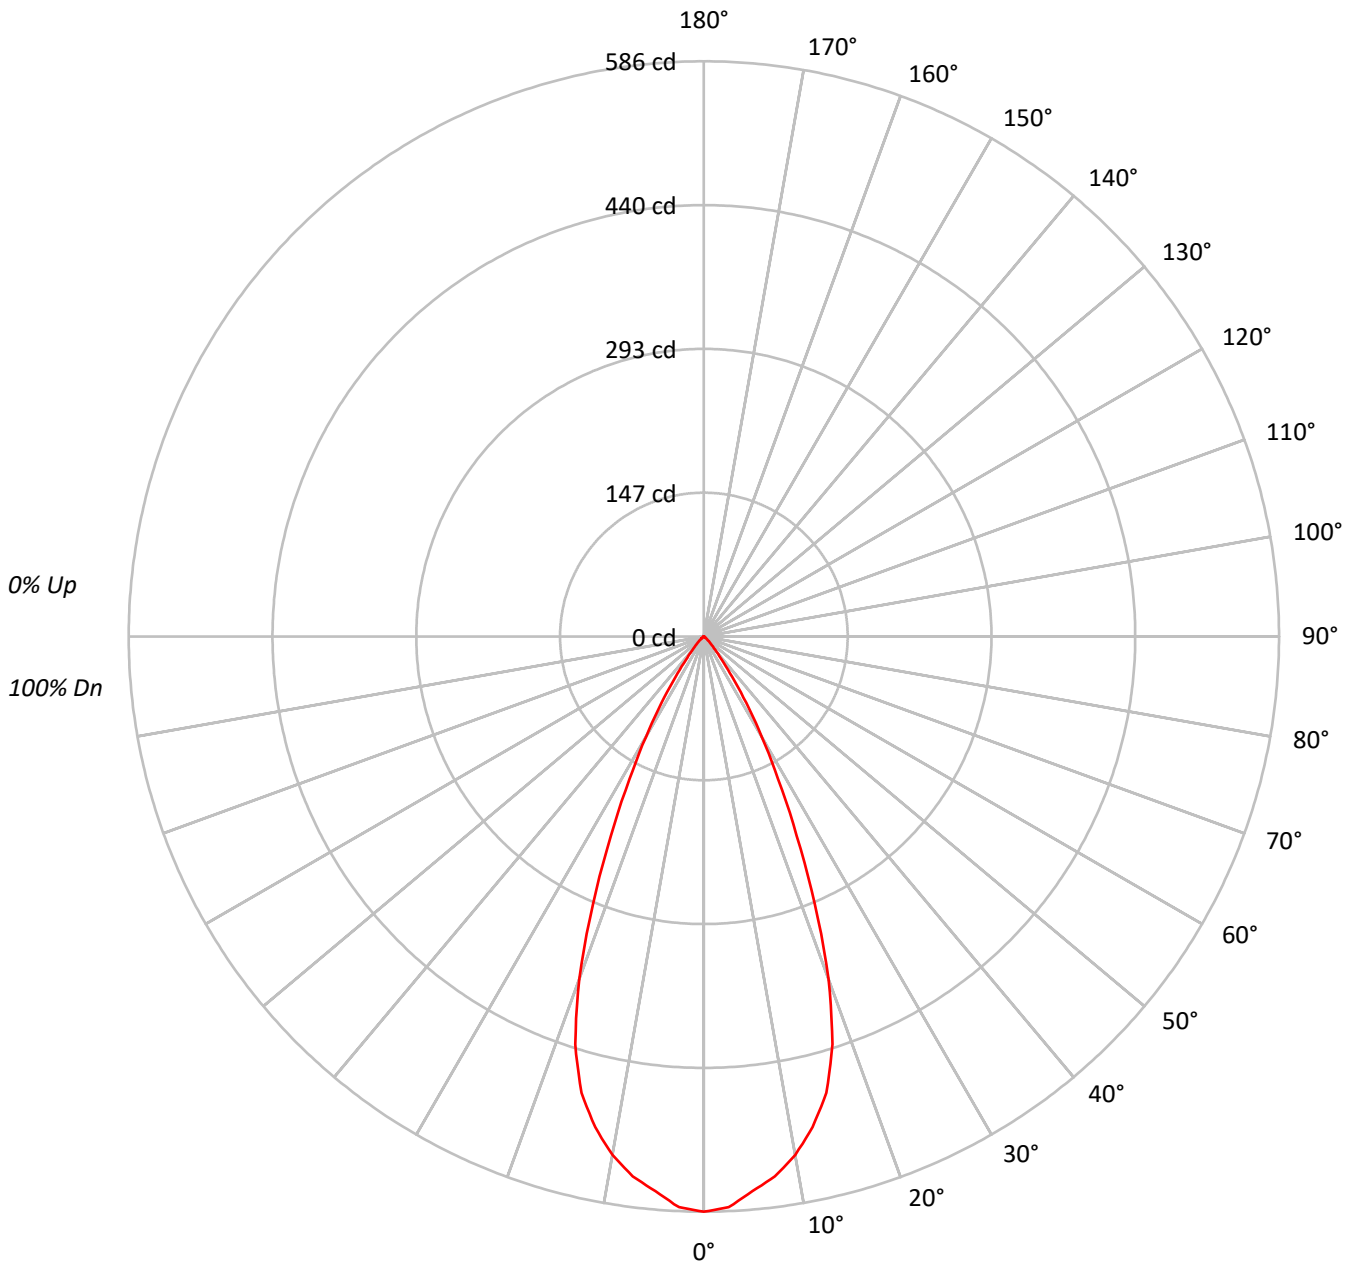



TEST NUMBER: P739303

CATALOG NUMBER: LD4D02D010-EU4DR450210IC9027-4LBCSSQMMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20																	
RC	80									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0															
RCR																																													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																											
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	98	98	97	95																											
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	91	90																											
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	89	87	85																											
4	100	94	89	85	99	93	88	85	91	87	84	89	86	83	87	84	82	81																											
5	96	89	84	80	95	88	83	80	86	82	79	85	81	79	83	80	78	77																											
6	92	85	80	76	91	84	79	76	83	78	75	81	77	75	80	77	74	73																											
7	89	81	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	69																											
8	85	77	72	68	84	76	71	68	75	71	68	74	70	67	73	70	67	66																											
9	82	73	68	65	81	73	68	65	72	68	65	71	67	64	71	67	64	63																											
10	79	70	65	62	78	70	65	62	69	65	62	68	64	61	68	64	61	60																											

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	64027
5°	62198
10°	59500
15°	54465
20°	43207
25°	26968
30°	14875
35°	6682
40°	2624
45°	1236
50°	578
55°	305
60°	153
65°	26
70°	32
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 1236 cd/sqm



TEST NUMBER: P739303

CATALOG NUMBER: LD4D02D010-EU4DR450210IC9027-4LBCSSQMMS

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	53.3	16.1
10°-20°	131.1	39.6
20°-30°	103.8	31.3
30°-40°	34.6	10.4
40°-50°	6.9	2.1
50°-60°	1.6	0.5
60°-70°	0.2	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	288.3	87.0
0°-40°	322.9	97.4
0°-60°	331.3	99.9
0°-90°	331.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	331.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	586	
5°	567	53
15°	482	131
25°	224	104
35°	50	35
45°	8	7
55°	2	2
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P739303

CATALOG NUMBER: LD4D02D010-EU4DR450210IC9027-4LBCSSQMMS

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	586.0
2.5°	582.1
5°	567.1
7.5°	554.7
10°	536.3
12.5°	511.9
15°	481.5
17.5°	435.7
20°	371.6
22.5°	295.2
25°	223.7
27.5°	163.8
30°	117.9
32.5°	80.2
35°	50.1
37.5°	29.7
40°	18.4
42.5°	12.1
45°	8.0
47.5°	5.2
50°	3.4
52.5°	2.3
55°	1.6
57.5°	1.1
60°	0.7
62.5°	0.3
65°	0.1
67.5°	0.1
70°	0.1
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)