

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P744875

Luminaire Tested: LD4D25D010-EU4DR2015309024-4LBCSSQMW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P744875
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D25D010-EU4DR2015309024-4LBCSSQMW
Description: 4 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 20° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2058.8 lumens
Efficiency: N/A
Efficacy: 82.0 lumens/watt
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 25.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P744875
CATALOG NUMBER: LD4D25D010-EU4DR2015309024-4LBCSSQMW

Luminous Intensity Polar Plot

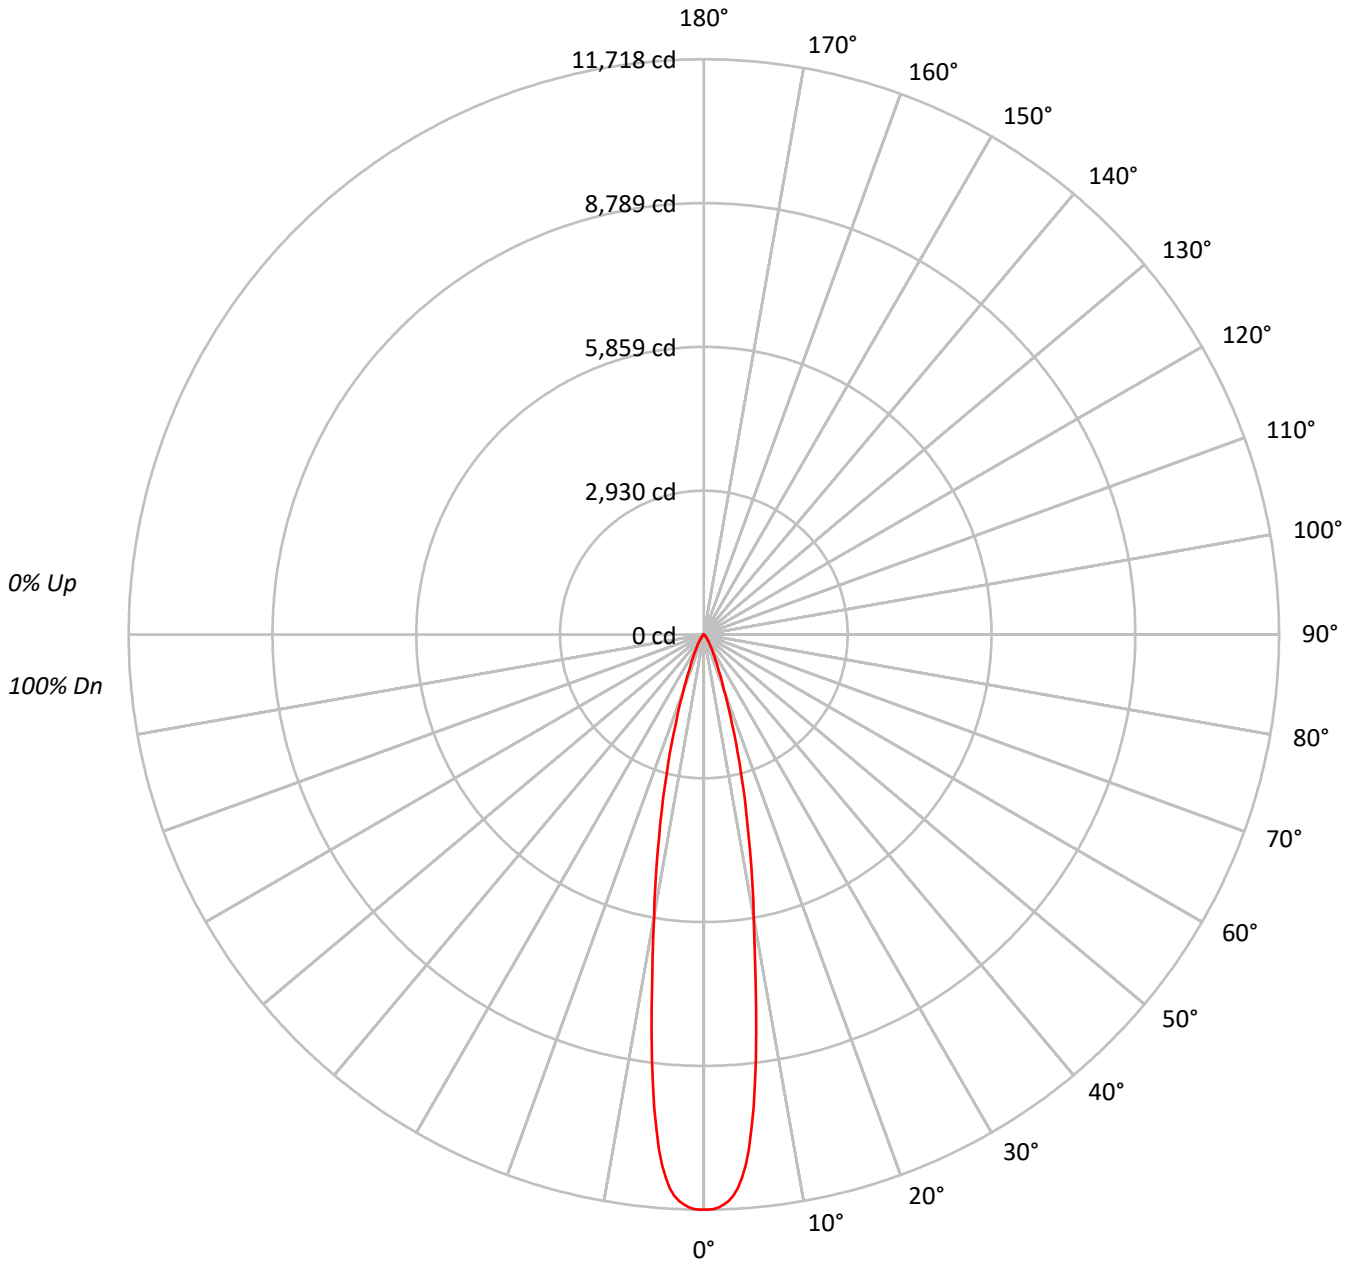



TEST NUMBER: P744875

CATALOG NUMBER: LD4D25D010-EU4DR2015309024-4LBCSSQMW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	98	96	94															
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	98	96	95	94															
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	95	93	92	91															
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	93	91	89	88															
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	91	88	86	85															
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	88	86	84	83															
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	86	84	82	81															
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	84	82	80	79															
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	82	80	78	77															
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	81	78	76	75															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1280350
5°	1155108
10°	648315
15°	329549
20°	139527
25°	64413
30°	34102
35°	18367
40°	9827
45°	5810
50°	3366
55°	1791
60°	1136
65°	801
70°	319
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 5810 cd/sqm



TEST NUMBER: P744875

CATALOG NUMBER: LD4D25D010-EU4DR2015309024-4LBCSSQMW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	834.3	40.5
10°-20°	821.5	39.9
20°-30°	268.4	13.0
30°-40°	91.4	4.4
40°-50°	30.7	1.5
50°-60°	9.2	0.4
60°-70°	3.1	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1924.3	93.5
0°-40°	2015.6	97.9
0°-60°	2055.6	99.8
0°-90°	2058.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2058.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	11718	
5°	10532	834
15°	2913	822
25°	534	268
35°	138	91
45°	38	31
55°	9	9
65°	3	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P744875
CATALOG NUMBER: LD4D25D010-EU4DR2015309024-4LBCSSQMW

CANDELA DISTRIBUTION (FULL):

	0°
0°	11718.3
0.5°	11718.3
1°	11703.7
1.5°	11674.5
2°	11621.2
2.5°	11550.3
3°	11450.1
3.5°	11310.3
4°	11102.6
4.5°	10850.1
5°	10531.8
5.5°	10113.4
6°	9684.5
6.5°	9193.1
7°	8712.0
7.5°	8148.5
8°	7645.6
8.5°	7139.5
9°	6672.0
9.5°	6243.1
10°	5843.5
12.5°	4195.8
15°	2913.4
17.5°	1903.3
20°	1200.0
22.5°	777.4
25°	534.3
27.5°	375.7
30°	270.3
32.5°	194.1
35°	137.7
37.5°	96.0
40°	68.9
42.5°	50.1
45°	37.6
47.5°	29.2
50°	19.8
52.5°	12.5
55°	9.4
57.5°	7.3
60°	5.2
62.5°	4.2
65°	3.1



TEST NUMBER: P744875
CATALOG NUMBER: LD4D25D010-EU4DR2015309024-4LBCSSQMW

CANDELA DISTRIBUTION (continued):

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





67.5°		2.1
70°		1.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)