

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P745833

Luminaire Tested: LD4D30D010-EU4DR2015309027-4LBSQW1B

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P745833  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D30D010-EU4DR2015309027-4LBSQW1B  
Description: 4 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 20° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2196.9 lumens  
Efficiency: N/A  
Efficacy: 75.8 lumens/watt  
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 29  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P745833

CATALOG NUMBER: LD4D30D010-EU4DR2015309027-4LBSQW1B

### Luminous Intensity Polar Plot

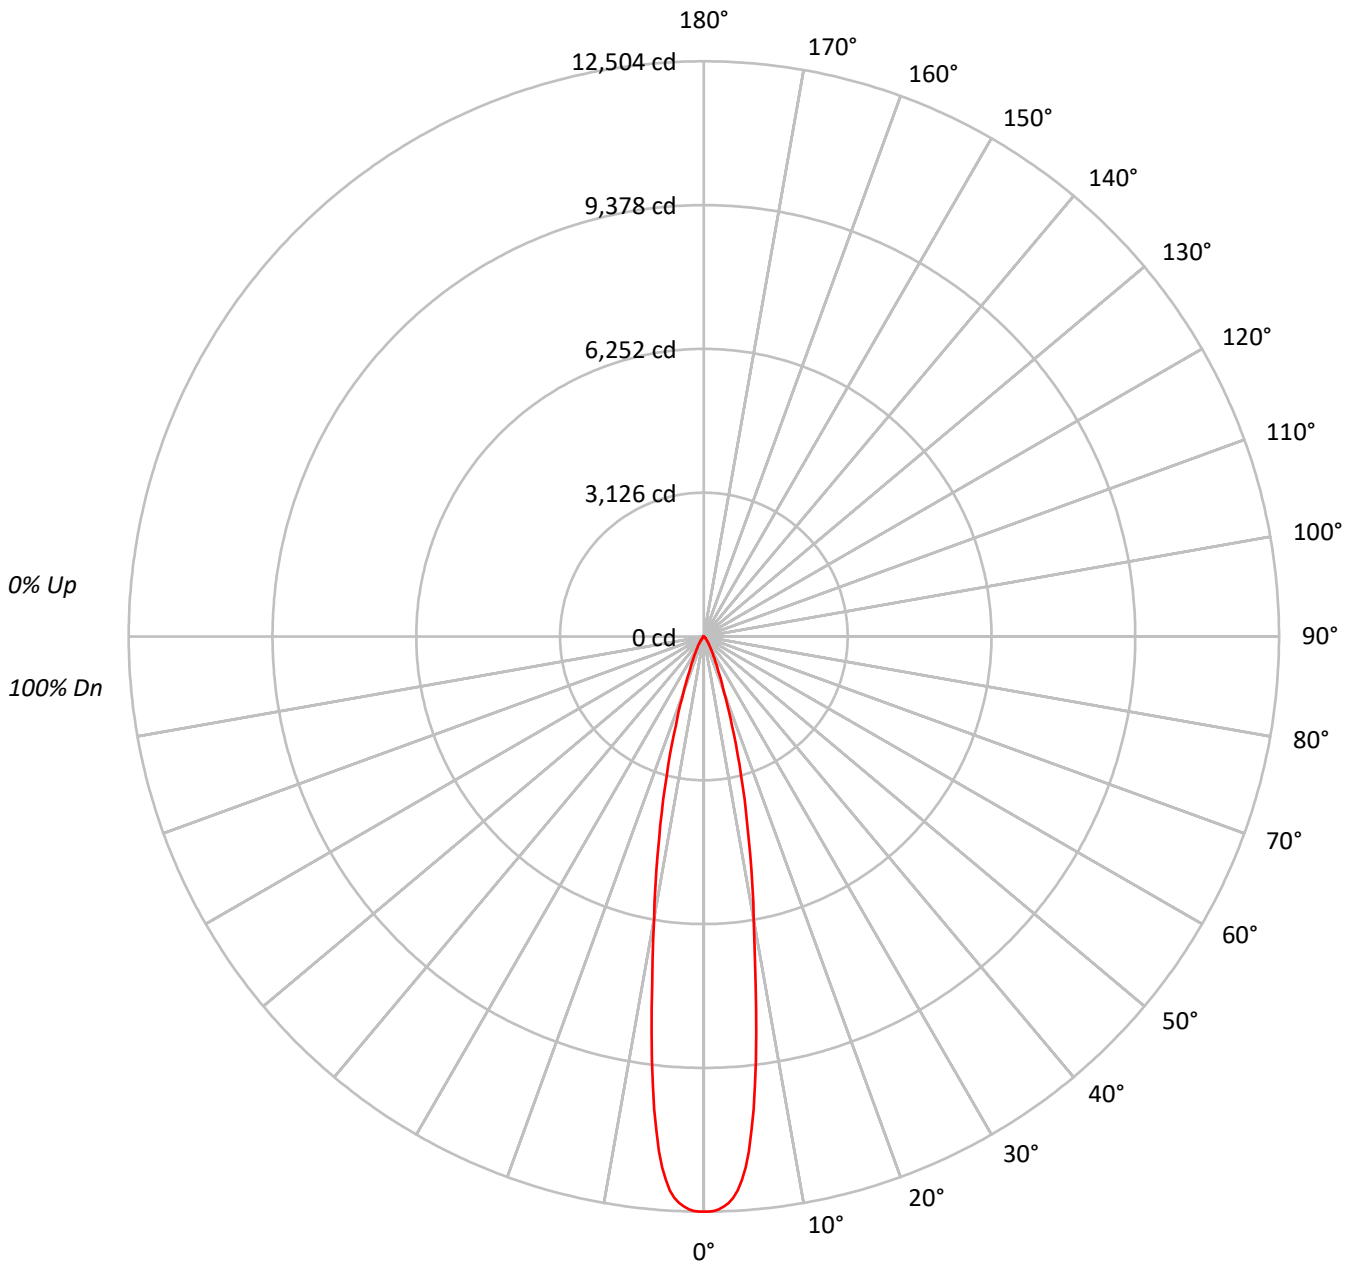



TEST NUMBER: P745833

CATALOG NUMBER: LD4D30D010-EU4DR2015309027-4LBSQW1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	98	97																
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	94	98	94																
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	91	98	91																
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	88	93	88																
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	85	91	86																
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	83	88	84																
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	81	86	82																
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	79	84	80																
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	77	82	78																
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	75	81	76																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1366207
5°	1232574
10°	691794
15°	351652
20°	148887
25°	68729
30°	36386
35°	19607
40°	10483
45°	6196
50°	3604
55°	1905
60°	1224
65°	853
70°	351
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 6196 cd/sqm



TEST NUMBER: P745833

CATALOG NUMBER: LD4D30D010-EU4DR2015309027-4LBSQW1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	890.3	40.5
10°-20°	876.6	39.9
20°-30°	286.4	13.0
30°-40°	97.5	4.4
40°-50°	32.8	1.5
50°-60°	9.9	0.4
60°-70°	3.3	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2053.3	93.5
0°-40°	2150.8	97.9
0°-60°	2193.5	99.8
0°-90°	2196.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2196.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	12504	
5°	11238	890
15°	3109	877
25°	570	286
35°	147	98
45°	40	33
55°	10	10
65°	3	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P745833

CATALOG NUMBER: LD4D30D010-EU4DR2015309027-4LBSQW1B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	12504.1
0.5°	12504.1
1°	12488.6
1.5°	12457.4
2°	12400.6
2.5°	12324.9
3°	12218.0
3.5°	12068.8
4°	11847.2
4.5°	11577.8
5°	11238.1
5.5°	10791.6
6°	10334.0
6.5°	9809.6
7°	9296.3
7.5°	8695.0
8°	8158.3
8.5°	7618.3
9°	7119.5
9.5°	6661.8
10°	6235.4
12.5°	4477.2
15°	3108.8
17.5°	2031.0
20°	1280.5
22.5°	829.5
25°	570.1
27.5°	400.8
30°	288.4
32.5°	207.1
35°	147.0
37.5°	102.4
40°	73.5
42.5°	53.4
45°	40.1
47.5°	31.2
50°	21.2
52.5°	13.4
55°	10.0
57.5°	7.8
60°	5.6
62.5°	4.5
65°	3.3



TEST NUMBER: P745833

CATALOG NUMBER: LD4D30D010-EU4DR2015309027-4LBSQW1B

**CANDELA DISTRIBUTION (continued):**

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





67.5°		2.2
70°		1.1

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)