

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P745873

Luminaire Tested: LD4D30D010-EU4DR2015309040-4LBSQW1MW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P745873  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D30D010-EU4DR2015309040-4LBSQW1MW  
Description: 4 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 20° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2660.7 lumens  
Efficiency: N/A  
Efficacy: 91.7 lumens/watt  
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 29  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P745873  
CATALOG NUMBER: LD4D30D010-EU4DR2015309040-4LBSQW1MW

### Luminous Intensity Polar Plot

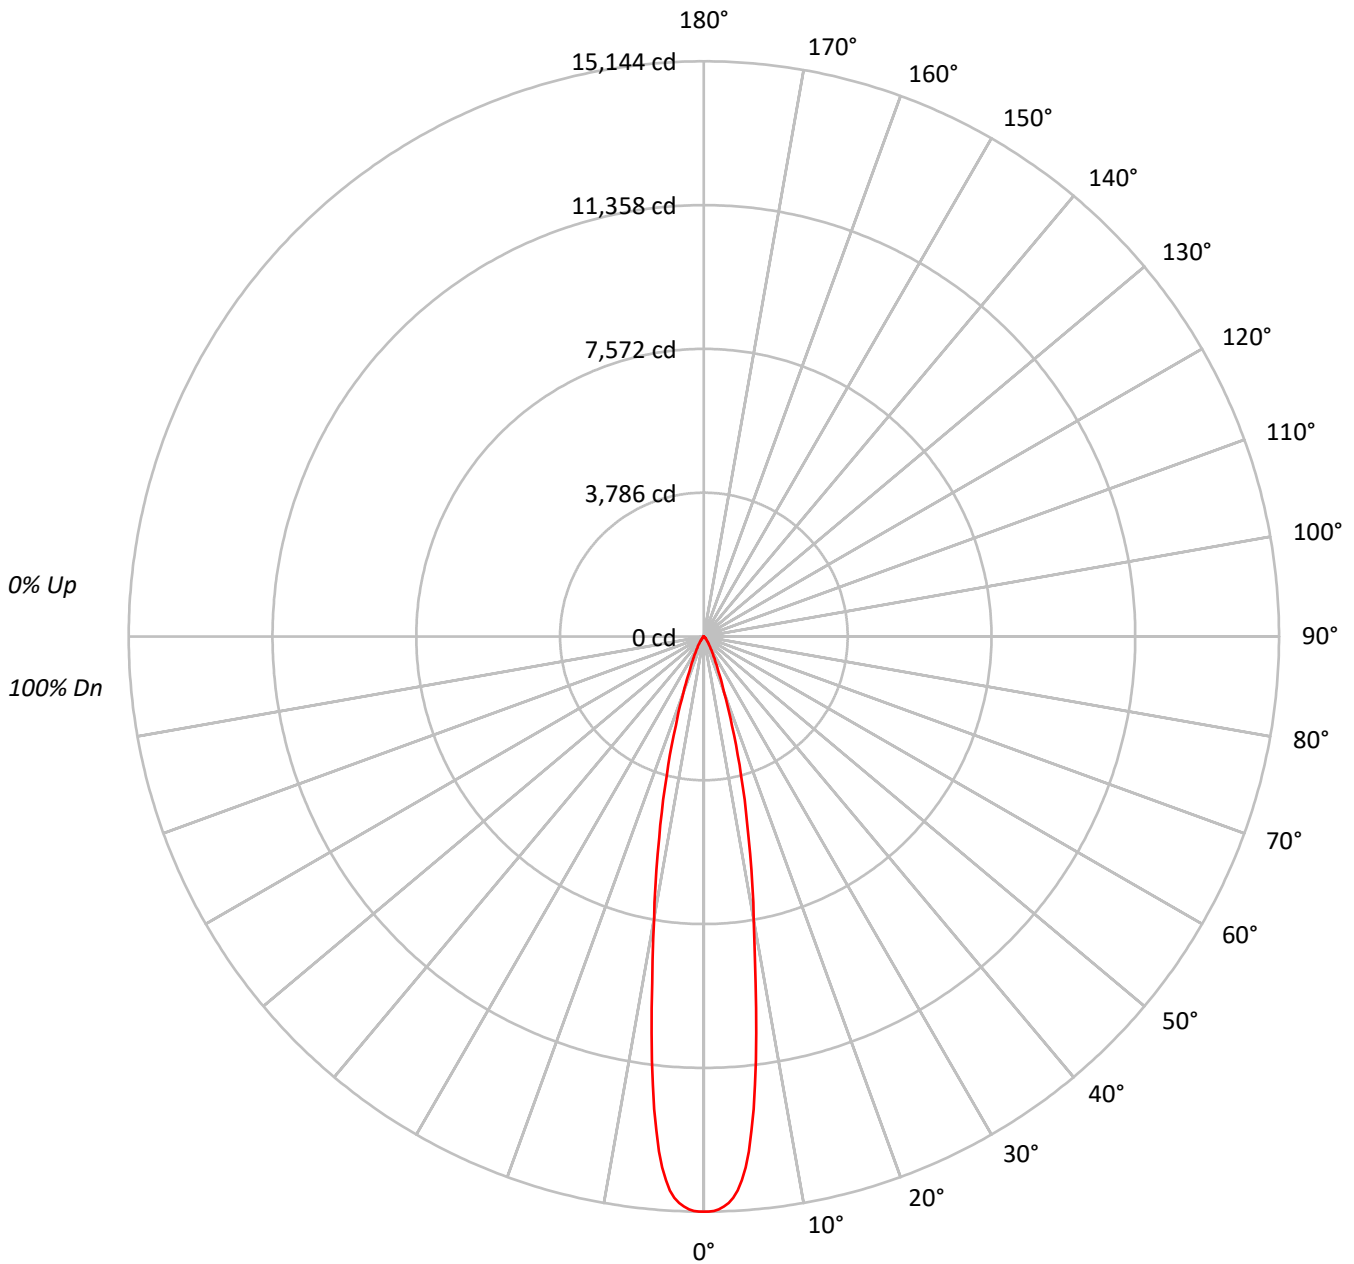



TEST NUMBER: P745873

CATALOG NUMBER: LD4D30D010-EU4DR2015309040-4LBSQW1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	98	97																
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	94	98	94																
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	91	98	91																
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	88	93	89																
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	85	91	86																
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	83	88	84																
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	81	86	82																
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	79	84	80																
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	77	82	78																
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	75	81	76																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1654678
5°	1492829
10°	837855
15°	425901
20°	180316
25°	83244
30°	44069
35°	23742
40°	12694
45°	7494
50°	4351
55°	2305
60°	1464
65°	1034
70°	415
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 7494 cd/sqm



TEST NUMBER: P745873

CATALOG NUMBER: LD4D30D010-EU4DR2015309040-4LBSQW1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1078.3	40.5
10°-20°	1061.7	39.9
20°-30°	346.9	13.0
30°-40°	118.1	4.4
40°-50°	39.7	1.5
50°-60°	11.9	0.4
60°-70°	4.0	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2486.8	93.5
0°-40°	2604.9	97.9
0°-60°	2656.6	99.8
0°-90°	2660.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2660.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	15144	
5°	13611	###
15°	3765	1062
25°	690	347
35°	178	118
45°	48	40
55°	12	12
65°	4	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P745873

CATALOG NUMBER: LD4D30D010-EU4DR2015309040-4LBSQW1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	15144.3
0.5°	15144.3
1°	15125.5
1.5°	15087.7
2°	15018.9
2.5°	14927.2
3°	14797.8
3.5°	14617.0
4°	14348.7
4.5°	14022.3
5°	13611.0
5.5°	13070.2
6°	12516.0
6.5°	11880.8
7°	11259.1
7.5°	10530.9
8°	9880.9
8.5°	9226.8
9°	8622.7
9.5°	8068.4
10°	7551.9
12.5°	5422.6
15°	3765.2
17.5°	2459.8
20°	1550.8
22.5°	1004.7
25°	690.5
27.5°	485.5
30°	349.3
32.5°	250.8
35°	178.0
37.5°	124.1
40°	89.0
42.5°	64.7
45°	48.5
47.5°	37.8
50°	25.6
52.5°	16.2
55°	12.1
57.5°	9.4
60°	6.7
62.5°	5.4
65°	4.0



TEST NUMBER: P745873  
CATALOG NUMBER: LD4D30D010-EU4DR2015309040-4LBSQW1MW

**CANDELA DISTRIBUTION (continued):**

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





67.5°		2.7
70°		1.3

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)