

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P740226

Luminaire Tested: LD4D05D010-EU4DR400210IC9024-4LBCSSQMMS

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P740226
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-28)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D05D010-EU4DR400210IC9024-4LBCSSQMMS
Description: 4 INCH SQAURE SHALLOW CAST MATTE METALLIC SILVER TRIM, WITH 40° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 545.6 lumens
Efficiency: N/A
Efficacy: 72.7 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.6
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P740226
CATALOG NUMBER: LD4D05D010-EU4DR400210IC9024-4LBCSSQMMS

Luminous Intensity Polar Plot

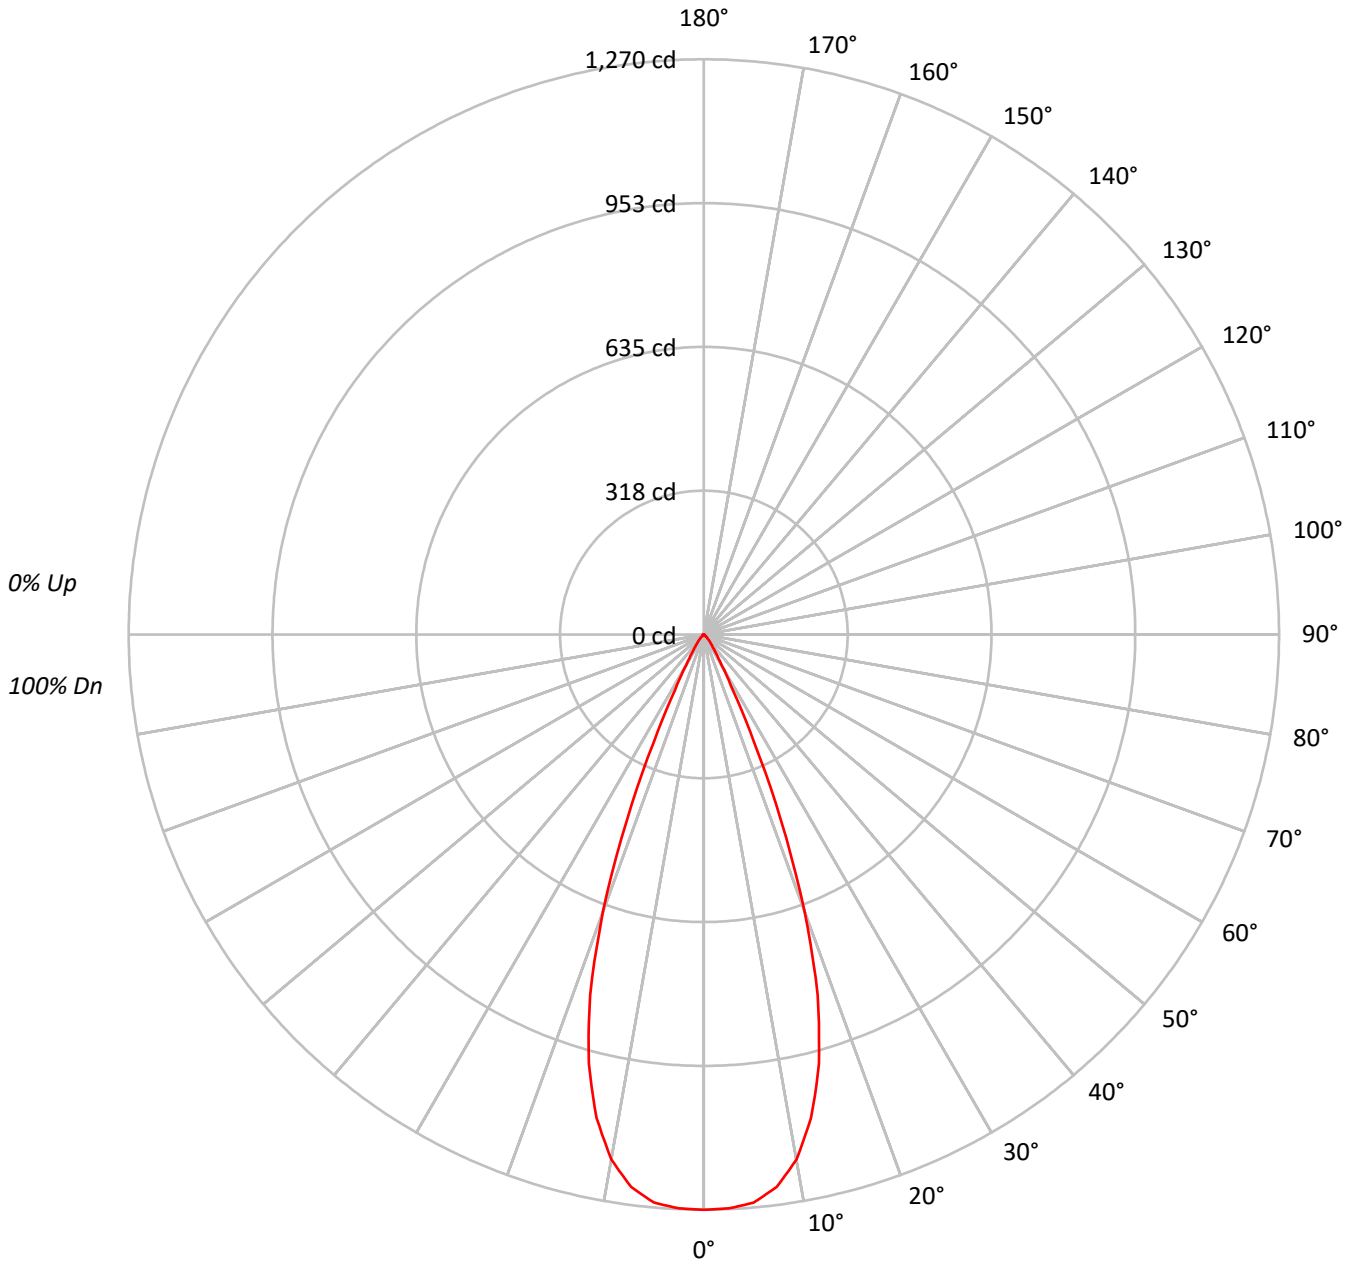



TEST NUMBER: P740226

CATALOG NUMBER: LD4D05D010-EU4DR400210IC9024-4LBCSSQMMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20								
RC	80									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0															
RCR	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	99	98	97	96	95	94	93	92																
	1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	97	96	95	94	93	92	91	90	89	88	87	86																
	2	110	106	103	100	108	105	102	99	102	99	97	99	97	95	96	95	93	92	91	90	89	88	87	86	85	84	83	82																
	3	106	101	97	94	104	100	96	93	97	94	92	95	93	90	93	91	89	88	87	86	85	84	83	82	81	80	79	78																
	4	102	97	92	89	101	95	91	88	93	90	87	92	89	86	90	87	85	84	83	82	81	80	79	78	77	76	75	74																
	5	99	92	88	84	97	91	87	84	90	86	83	88	85	83	87	84	82	81	80	79	78	77	76	75	74	73	72	71																
	6	95	88	84	80	94	88	83	80	86	82	80	85	82	79	84	81	79	78	77	76	75	74	73	72	71	70	69	68																
	7	92	85	80	77	91	84	80	77	83	79	76	82	79	76	81	78	76	75	74	73	72	71	70	69	68	67	66	65																
	8	89	82	77	74	88	81	77	74	80	76	73	79	76	73	78	75	73	72	71	70	69	68	67	66	65	64	63	62																
	9	86	79	74	71	85	78	74	71	77	73	71	77	73	70	76	72	70	69	68	67	66	65	64	63	62	61	60	59																
	10	83	76	71	68	82	75	71	68	75	71	68	74	70	68	73	70	68	67	66	65	64	63	62	61	60	59	58	57																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	138794
5°	138118
10°	130562
15°	110988
20°	75647
25°	31562
30°	9929
35°	4615
40°	2553
45°	1174
50°	561
55°	305
60°	153
65°	52
70°	32
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1174 cd/sqm



TEST NUMBER: P740226

CATALOG NUMBER: LD4D05D010-EU4DR400210IC9024-4LBCSSQMMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	117.6	21.6
10°-20°	263.4	48.3
20°-30°	131.9	24.2
30°-40°	24.2	4.4
40°-50°	6.7	1.2
50°-60°	1.5	0.3
60°-70°	0.3	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	512.9	94.0
0°-40°	537.1	98.4
0°-60°	545.3	99.9
0°-90°	545.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	545.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1270	
5°	1259	118
15°	981	263
25°	262	132
35°	35	24
45°	8	7
55°	2	2
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P740226

CATALOG NUMBER: LD4D05D010-EU4DR400210IC9024-4LBCSSQMMS

CANDELA DISTRIBUTION (FULL):

	0°
0°	1270.3
2.5°	1268.5
5°	1259.3
7.5°	1230.3
10°	1176.8
12.5°	1093.4
15°	981.2
17.5°	835.4
20°	650.6
22.5°	443.6
25°	261.8
27.5°	138.4
30°	78.7
32.5°	50.8
35°	34.6
37.5°	24.7
40°	17.9
42.5°	12.3
45°	7.6
47.5°	4.8
50°	3.3
52.5°	2.3
55°	1.6
57.5°	1.0
60°	0.7
62.5°	0.5
65°	0.2
67.5°	0.2
70°	0.1
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)