

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P750426

Luminaire Tested: LD4D55D010-EU4DR6555659027-4LBCSSQMW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P750426
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D55D010-EU4DR6555659027-4LBCSSQMW
Description: 4 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4760.7 lumens
Efficiency: N/A
Efficacy: 81.8 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 58.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P750426
CATALOG NUMBER: LD4D55D010-EU4DR6555659027-4LBCSSQMW

Luminous Intensity Polar Plot

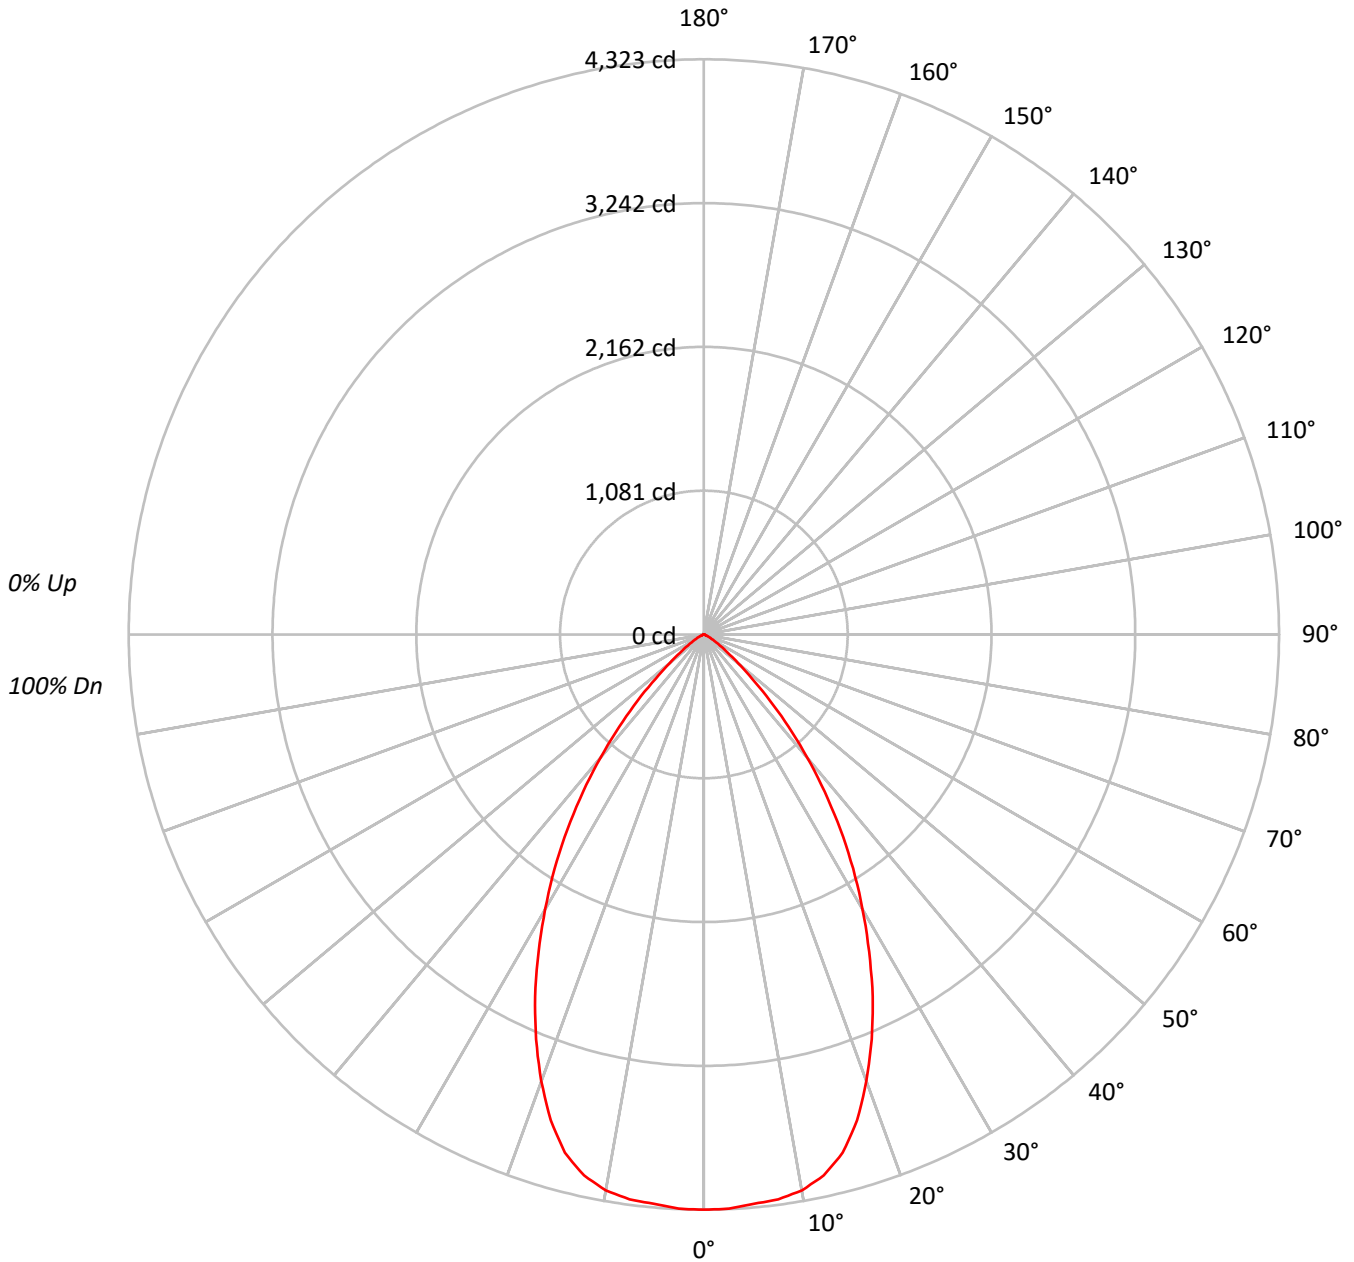



TEST NUMBER: P750426
 CATALOG NUMBER: LD4D55D010-EU4DR6555659027-4LBCSSQMW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93	93	93	93
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85	85	85	85
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78	78	78	78
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72	72	72	72
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66	66	66	66
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61	61	61	61
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56	56	56	56
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52	52	52	52
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49	49	49	49
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46	46	46	46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	252457
5°	251820
10°	251607
15°	243852
20°	221995
25°	193454
30°	160903
35°	127488
40°	92015
45°	58131
50°	30302
55°	16109
60°	8457
65°	4657
70°	1947
75°	2144
80°	1480
85°	1273

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 58131 cd/sqm



TEST NUMBER: P750426

CATALOG NUMBER: LD4D55D010-EU4DR6555659027-4LBCSSQMW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	408.8	8.6
10°-20°	1119.4	23.5
20°-30°	1368.3	28.7
30°-40°	1110.2	23.3
40°-50°	553.2	11.6
50°-60°	154.3	3.2
60°-70°	35.1	0.7
70°-80°	9.1	0.2
80°-90°	2.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2896.5	60.8
0°-40°	4006.7	84.2
0°-60°	4714.2	99.0
0°-90°	4760.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4760.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4323	
5°	4295	409
15°	4033	1119
25°	3002	1368
35°	1788	1110
45°	704	553
55°	158	154
65°	34	35
75°	10	9
85°	2	2
90°	0	



TEST NUMBER: P750426

CATALOG NUMBER: LD4D55D010-EU4DR6555659027-4LBCSSQMW

CANDELA DISTRIBUTION (FULL):

	0°
0°	4322.6
2.5°	4319.4
5°	4295.3
7.5°	4281.3
10°	4242.6
12.5°	4163.8
15°	4033.0
17.5°	3828.4
20°	3571.8
22.5°	3294.8
25°	3002.0
27.5°	2688.8
30°	2385.9
32.5°	2086.7
35°	1788.1
37.5°	1490.2
40°	1206.9
42.5°	941.4
45°	703.8
47.5°	490.4
50°	333.5
52.5°	229.9
55°	158.2
57.5°	106.7
60°	72.4
62.5°	50.2
65°	33.7
67.5°	17.2
70°	11.4
72.5°	10.8
75°	9.5
77.5°	6.4
80°	4.4
82.5°	3.2
85°	1.9
87.5°	1.3
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)