

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P750474

Luminaire Tested: LD4D55D010-EU4DR6555659040-4LBSQW1B

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P750474
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D55D010-EU4DR6555659040-4LBSQW1B
Description: 4 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3880.8 lumens
Efficiency: N/A
Efficacy: 66.7 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 58.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P750474

CATALOG NUMBER: LD4D55D010-EU4DR6555659040-4LBSQW1B

Luminous Intensity Polar Plot

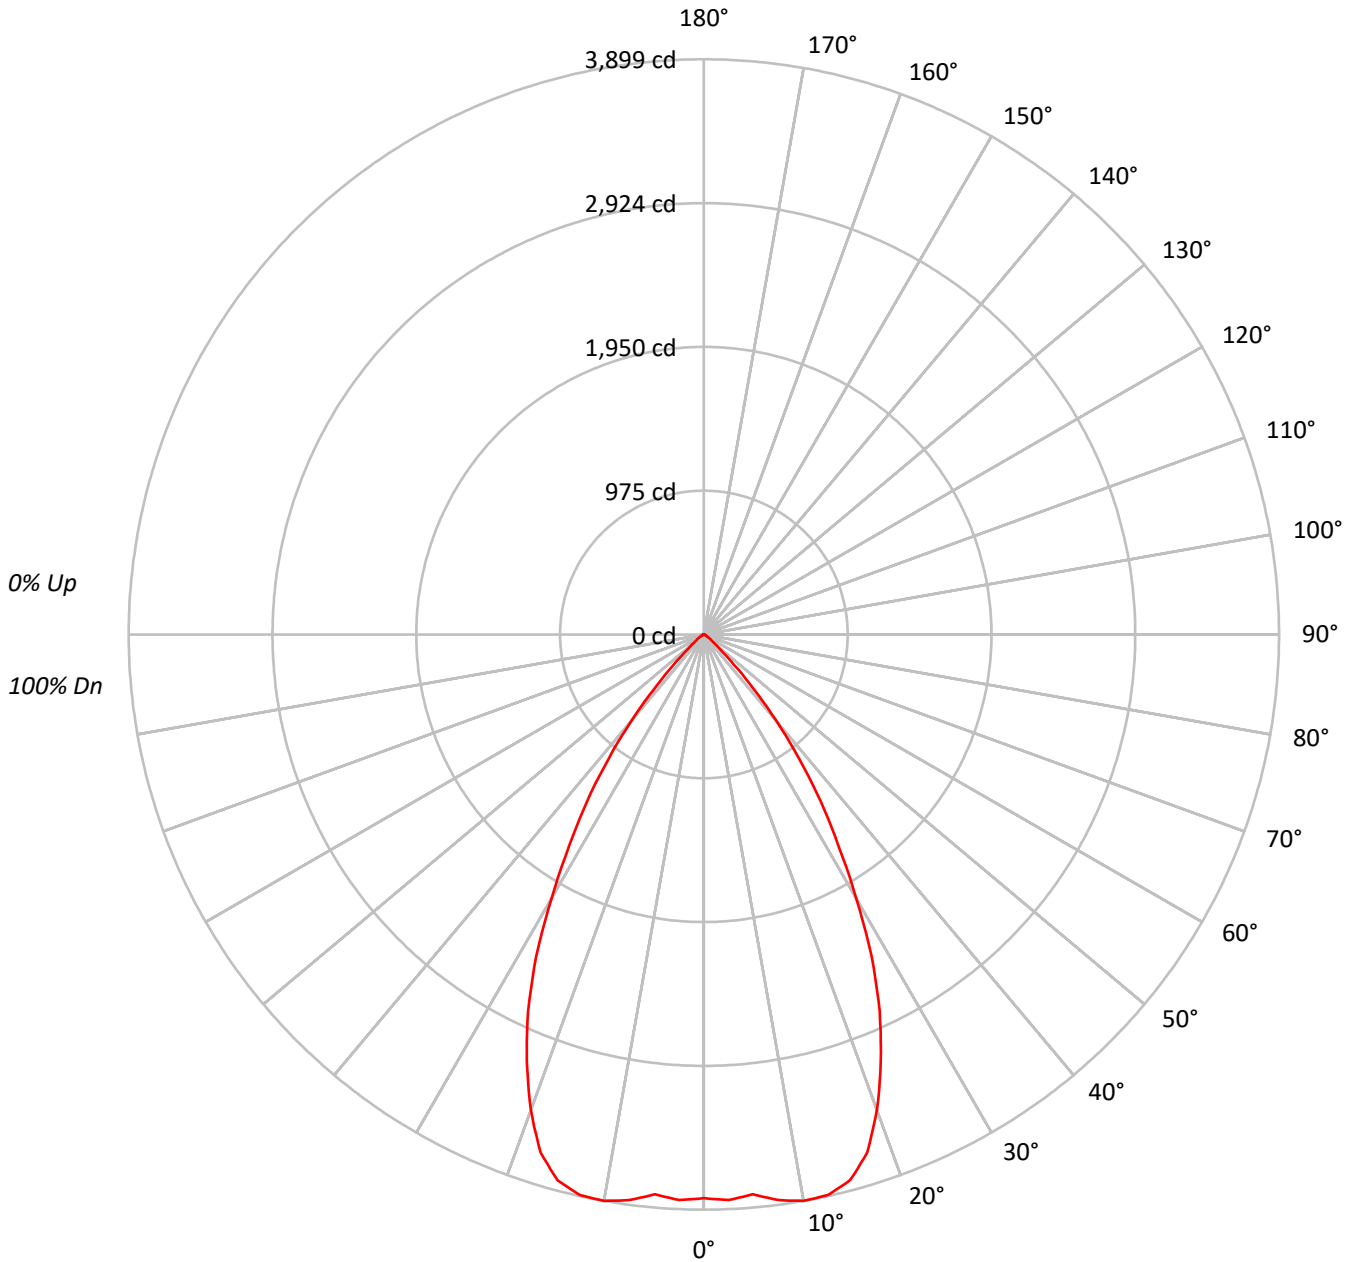



TEST NUMBER: P750474

CATALOG NUMBER: LD4D55D010-EU4DR6555659040-4LBSQW1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	417474
5°	417819
10°	432535
15°	433253
20°	398874
25°	339859
30°	260174
35°	183815
40°	108498
45°	44053
50°	15961
55°	8896
60°	5092
65°	2818
70°	2939
75°	2280
80°	2391
85°	2006

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 44053 cd/sqm



TEST NUMBER: P750474

CATALOG NUMBER: LD4D55D010-EU4DR6555659040-4LBSQW1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	367.9	9.5
10°-20°	1061.3	27.3
20°-30°	1273.3	32.8
30°-40°	855.7	22.1
40°-50°	256.2	6.6
50°-60°	45.2	1.2
60°-70°	12.9	0.3
70°-80°	6.3	0.2
80°-90°	2.0	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2702.6	69.6
0°-40°	3558.3	91.7
0°-60°	3859.7	99.5
0°-90°	3880.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3880.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3821	
5°	3810	368
15°	3830	1061
25°	2819	1273
35°	1378	856
45°	285	256
55°	47	45
65°	11	13
75°	5	6
85°	2	2
90°	0	



TEST NUMBER: P750474

CATALOG NUMBER: LD4D55D010-EU4DR6555659040-4LBSQW1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	3820.9
2.5°	3837.2
5°	3809.5
7.5°	3867.1
10°	3898.6
12.5°	3891.0
15°	3830.2
17.5°	3681.4
20°	3430.5
22.5°	3135.2
25°	2819.1
27.5°	2462.4
30°	2062.2
32.5°	1699.5
35°	1378.1
37.5°	1060.4
40°	760.7
42.5°	496.8
45°	285.1
47.5°	150.9
50°	93.9
52.5°	65.2
55°	46.7
57.5°	33.7
60°	23.3
62.5°	15.2
65°	10.9
67.5°	9.8
70°	9.2
72.5°	7.1
75°	5.4
77.5°	4.9
80°	3.8
82.5°	2.7
85°	1.6
87.5°	1.1
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)