

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P751088

Luminaire Tested: LD4D60D010-EU4DR5555659040-4LBCSSQMMS

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P751088
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-52)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D60D010-EU4DR5555659040-4LBCSSQMMS
Description: 4 INCH SQAURE SHALLOW CAST MATTE METALLIC SILVER TRIM, WITH 55° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6396.4 lumens
Efficiency: N/A
Efficacy: 99.3 lumens/watt
Spacing Criteria (0/90/45): 0.89 / 0.89 / 0.87
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 64.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P751088

CATALOG NUMBER: LD4D60D010-EU4DR5555659040-4LBCSSQMMS

Luminous Intensity Polar Plot

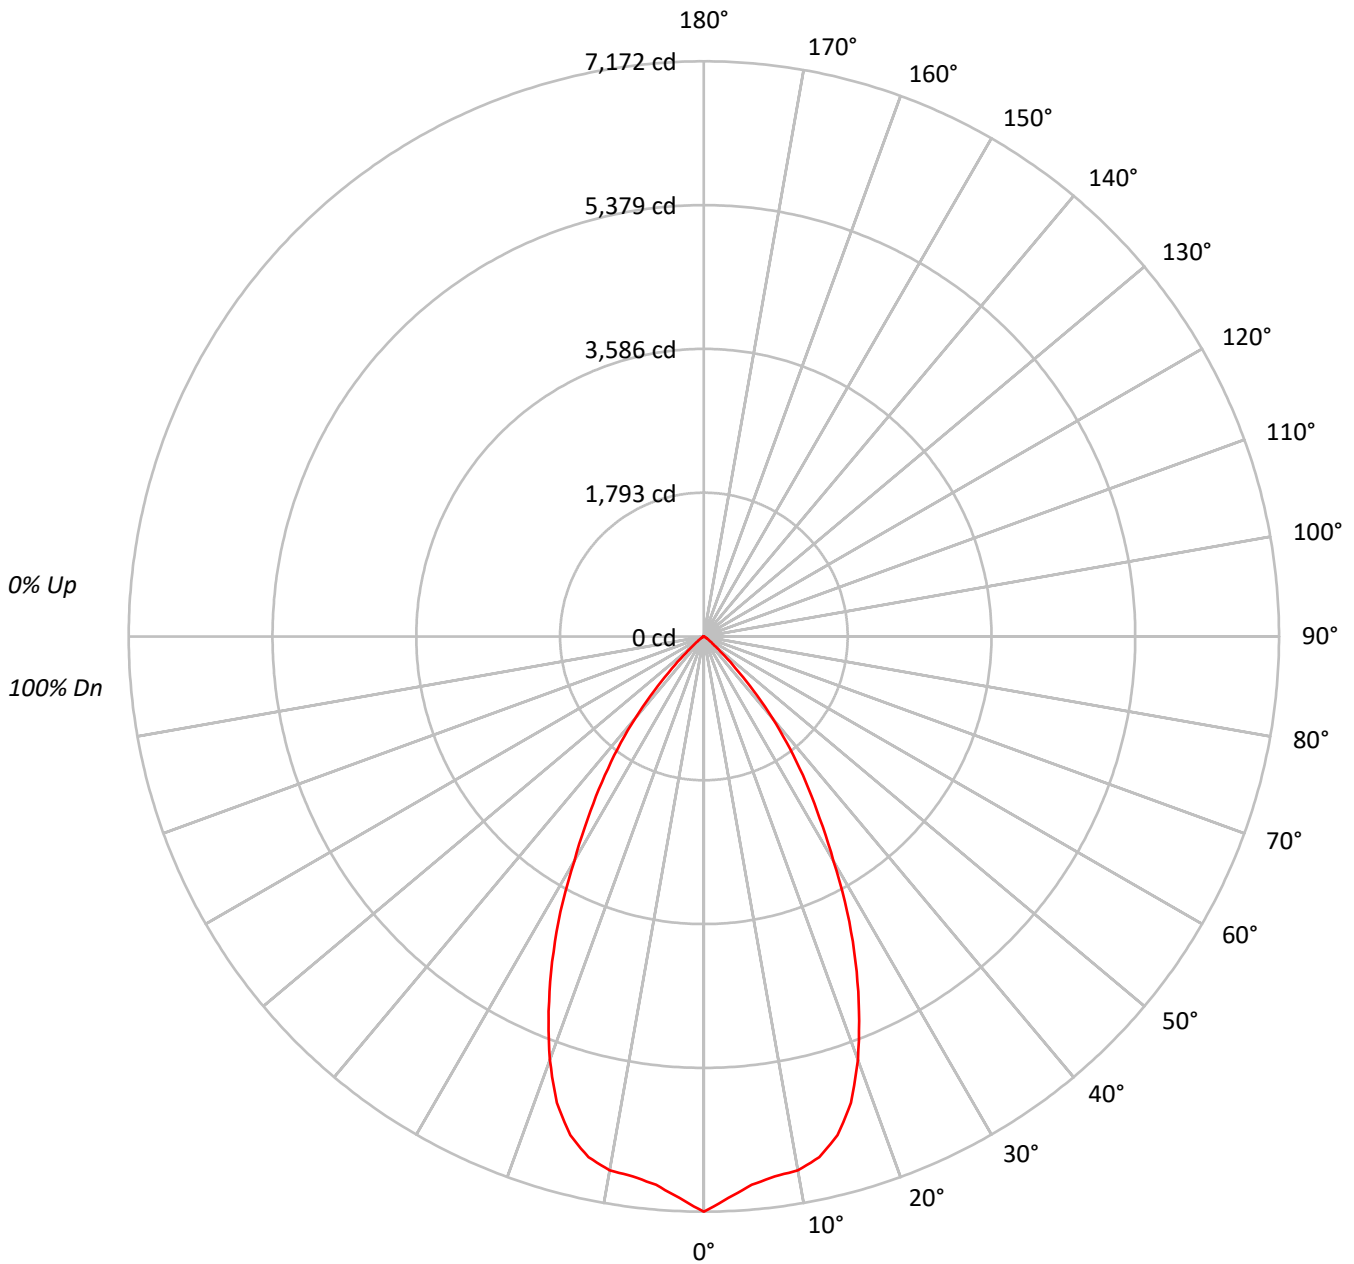



TEST NUMBER: P751088

CATALOG NUMBER: LD4D60D010-EU4DR5555659040-4LBCSSQMMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94																			
2	108	103	99	96	106	101	98	95	98	95	92	95	93	90	92	90	89	87																			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81																			
4	97	90	84	80	95	88	83	79	86	82	78	84	81	78	82	79	77	75																			
5	92	84	78	74	91	83	77	73	81	76	73	79	75	72	78	74	71	70																			
6	88	79	73	68	86	78	72	68	76	71	68	75	70	67	74	70	67	65																			
7	83	74	68	64	82	73	67	63	72	67	63	71	66	63	70	65	62	61																			
8	79	69	63	59	78	69	63	59	68	63	59	67	62	59	66	62	58	57																			
9	75	66	60	56	74	65	59	55	64	59	55	63	58	55	62	58	55	54																			
10	72	62	56	52	71	61	56	52	61	56	52	60	55	52	59	55	52	50																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	783673
5°	752545
10°	749708
15°	728178
20°	652919
25°	539596
30°	407596
35°	295536
40°	189141
45°	86376
50°	28251
55°	12191
60°	5245
65°	698
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 86376 cd/sqm



TEST NUMBER: P751088

CATALOG NUMBER: LD4D60D010-EU4DR5555659040-4LBCSSQMMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	652.9	10.2
10°-20°	1781.9	27.9
20°-30°	2030.6	31.7
30°-40°	1382.4	21.6
40°-50°	476.3	7.4
50°-60°	65.9	1.0
60°-70°	6.4	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4465.4	69.8
0°-40°	5847.8	91.4
0°-60°	6390.0	99.9
0°-90°	6396.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6396.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7172	
5°	6861	653
15°	6438	1782
25°	4476	2031
35°	2216	1382
45°	559	476
55°	64	66
65°	3	6
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P751088

CATALOG NUMBER: LD4D60D010-EU4DR5555659040-4LBCSSQMMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	7172.5
2.5°	7008.1
5°	6861.4
7.5°	6789.4
10°	6757.4
12.5°	6650.8
15°	6437.5
17.5°	6098.9
20°	5615.4
22.5°	5057.2
25°	4475.9
27.5°	3870.7
30°	3230.7
32.5°	2688.6
35°	2215.7
37.5°	1766.0
40°	1326.1
42.5°	919.0
45°	559.0
47.5°	301.3
50°	166.2
52.5°	98.7
55°	64.0
57.5°	40.9
60°	24.0
62.5°	10.7
65°	2.7
67.5°	0.9
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)