

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P752685

Luminaire Tested: LD4D70BD010-EU4DR6070959024-4LBSQW1MW

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P752685  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D70BD010-EU4DR6070959024-4LBSQW1MW  
Description: 4 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 60° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 5239.4 lumens  
Efficiency: N/A  
Efficacy: 78.7 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 66.6  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P752685  
CATALOG NUMBER: LD4D70BD010-EU4DR6070959024-4LBSQW1MW

### Luminous Intensity Polar Plot

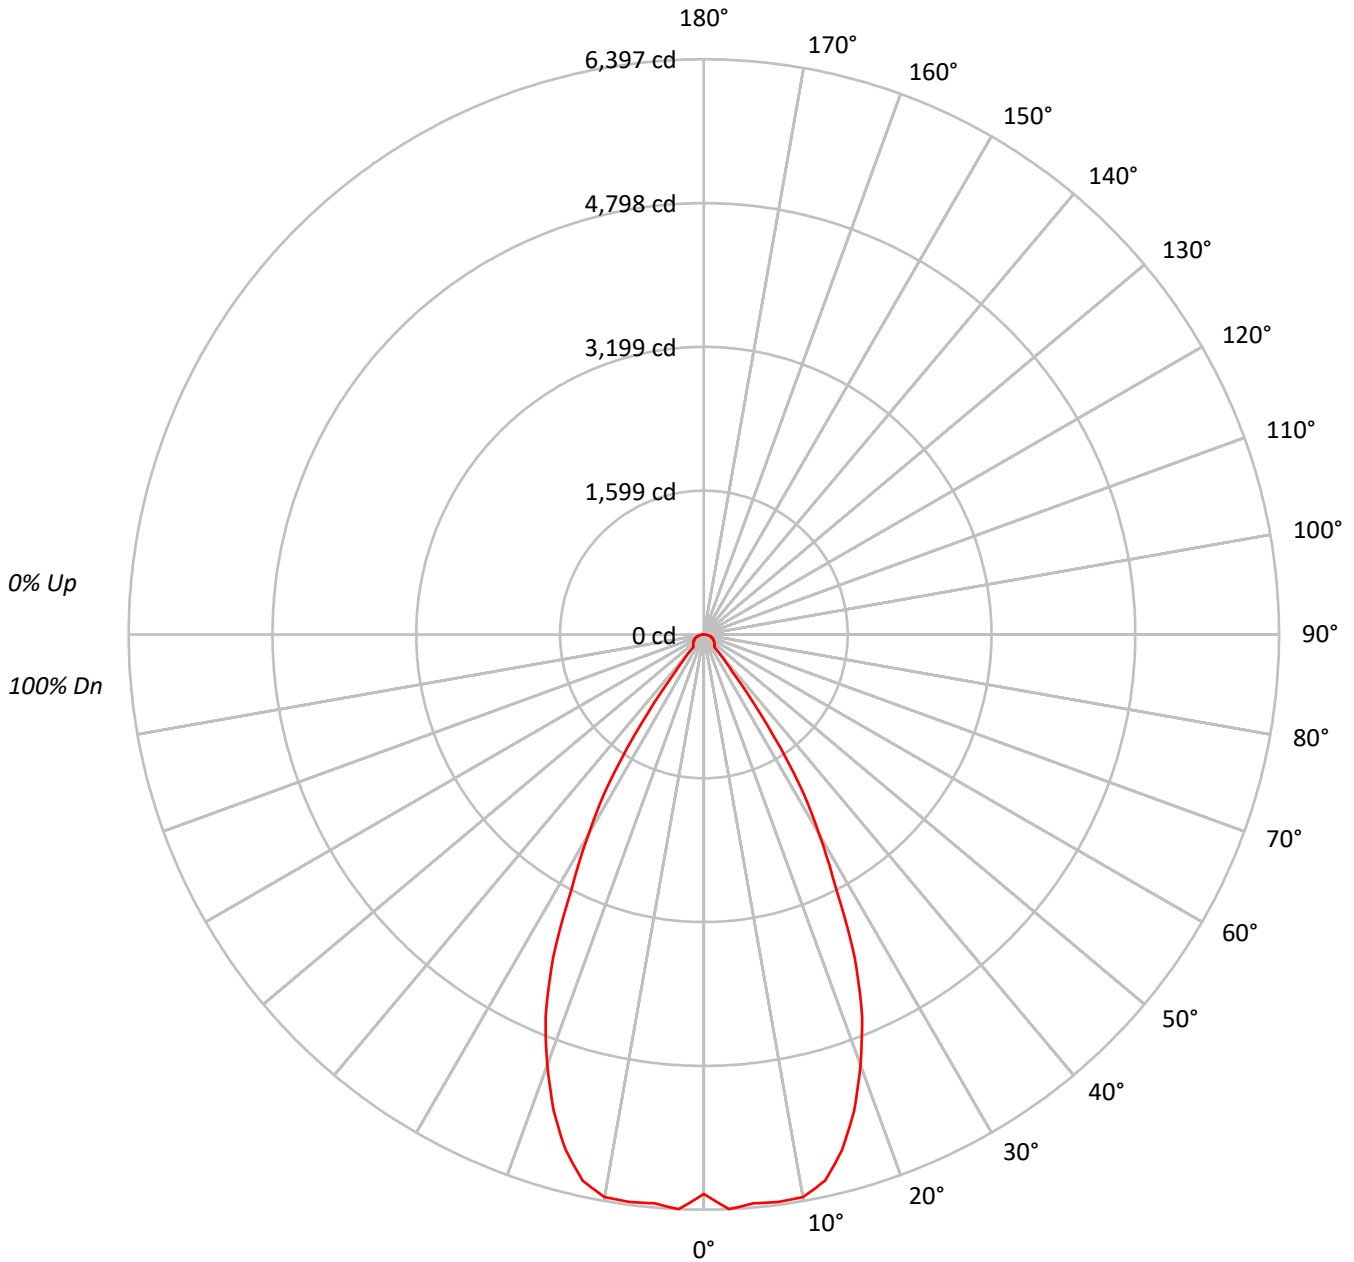



TEST NUMBER: P752685

CATALOG NUMBER: LD4D70BD010-EU4DR6070959024-4LBSQW1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93																			
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86																			
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80																			
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70																			
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66																			
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62																			
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59																			
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55																			
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	679864
5°	696588
10°	704997
15°	671609
20°	592154
25°	478944
30°	323963
35°	162340
40°	26329
45°	25774
50°	26296
55°	26688
60°	27424
65°	28051
70°	28719
75°	29044
80°	28000
85°	23317

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 75°  
 Luminance: 29044 cd/sqm



TEST NUMBER: P752685

CATALOG NUMBER: LD4D70BD010-EU4DR6070959024-4LBSQW1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	607.0	11.6
10°-20°	1642.3	31.3
20°-30°	1767.0	33.7
30°-40°	768.1	14.7
40°-50°	129.0	2.5
50°-60°	125.4	2.4
60°-70°	107.3	2.0
70°-80°	71.8	1.4
80°-90°	21.5	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4016.3	76.7
0°-40°	4784.4	91.3
0°-60°	5038.8	96.2
0°-90°	5239.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5239.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	6222	
5°	6351	607
15°	5937	1642
25°	3973	1767
35°	1217	768
45°	167	129
55°	140	125
65°	108	107
75°	69	72
85°	19	21
90°	0	



TEST NUMBER: P752685

CATALOG NUMBER: LD4D70BD010-EU4DR6070959024-4LBSQW1MW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	6222.4
2.5°	6397.3
5°	6351.2
7.5°	6365.8
10°	6354.4
12.5°	6223.2
15°	5937.4
17.5°	5553.5
20°	5092.8
22.5°	4599.6
25°	3972.8
27.5°	3177.6
30°	2567.8
32.5°	1979.1
35°	1217.1
37.5°	520.7
40°	184.6
42.5°	170.1
45°	166.8
47.5°	161.1
50°	154.7
52.5°	147.4
55°	140.1
57.5°	132.8
60°	125.5
62.5°	117.4
65°	108.5
67.5°	99.6
70°	89.9
72.5°	79.4
75°	68.8
77.5°	56.7
80°	44.5
82.5°	31.6
85°	18.6
87.5°	6.5
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)