

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P752763

Luminaire Tested: LD4D70BD010-EU4DR6570959024-4LBSQW1MW

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P752763  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D70BD010-EU4DR6570959024-4LBSQW1MW  
Description: 4 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4581.8 lumens  
Efficiency: N/A  
Efficacy: 68.8 lumens/watt  
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 66.6  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P752763  
CATALOG NUMBER: LD4D70BD010-EU4DR6570959024-4LBSQW1MW

### Luminous Intensity Polar Plot

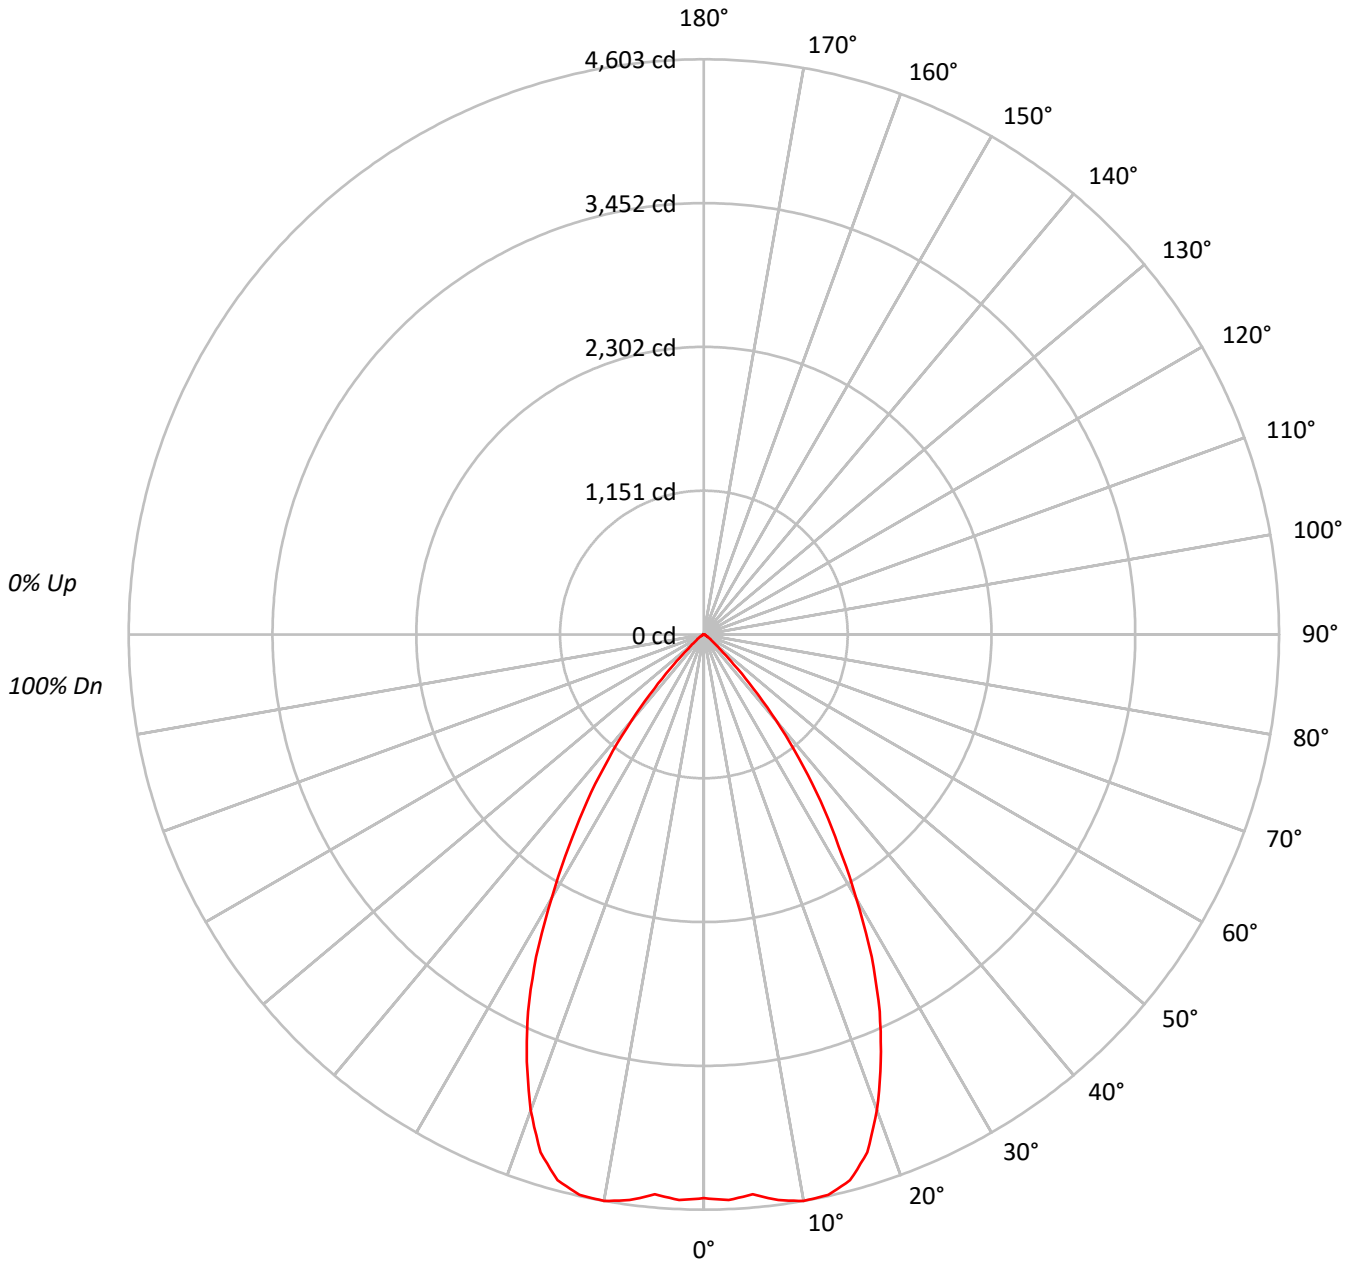



TEST NUMBER: P752763

CATALOG NUMBER: LD4D70BD010-EU4DR6570959024-4LBSQW1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	492886
5°	493288
10°	510664
15°	511506
20°	470928
25°	401258
30°	307170
35°	217014
40°	128096
45°	52011
50°	18851
55°	10496
60°	6031
65°	3309
70°	3482
75°	2702
80°	2831
85°	2382

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 52011 cd/sqm



TEST NUMBER: P752763

CATALOG NUMBER: LD4D70BD010-EU4DR6570959024-4LBSQW1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	434.4	9.5
10°-20°	1253.0	27.3
20°-30°	1503.4	32.8
30°-40°	1010.3	22.1
40°-50°	302.4	6.6
50°-60°	53.4	1.2
60°-70°	15.2	0.3
70°-80°	7.4	0.2
80°-90°	2.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3190.7	69.6
0°-40°	4201.0	91.7
0°-60°	4556.8	99.5
0°-90°	4581.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4581.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4511	
5°	4498	434
15°	4522	1253
25°	3328	1503
35°	1627	1010
45°	337	302
55°	55	53
65°	13	15
75°	6	7
85°	2	2
90°	0	



TEST NUMBER: P752763

CATALOG NUMBER: LD4D70BD010-EU4DR6570959024-4LBSQW1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	4511.1
2.5°	4530.3
5°	4497.6
7.5°	4565.6
10°	4602.8
12.5°	4593.8
15°	4522.0
17.5°	4346.4
20°	4050.2
22.5°	3701.5
25°	3328.4
27.5°	2907.2
30°	2434.7
32.5°	2006.5
35°	1627.0
37.5°	1252.0
40°	898.1
42.5°	586.6
45°	336.6
47.5°	178.2
50°	110.9
52.5°	76.9
55°	55.1
57.5°	39.7
60°	27.6
62.5°	17.9
65°	12.8
67.5°	11.5
70°	10.9
72.5°	8.3
75°	6.4
77.5°	5.8
80°	4.5
82.5°	3.2
85°	1.9
87.5°	1.3
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)