

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P752298

Luminaire Tested: LD4D70BD010-EU4DR3570959027-4LBCSSQMW

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P752298  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D70BD010-EU4DR3570959027-4LBCSSQMW  
Description: 4 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 35° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6154.1 lumens  
Efficiency: N/A  
Efficacy: 92.4 lumens/watt  
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 66.6  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P752298

CATALOG NUMBER: LD4D70BD010-EU4DR3570959027-4LBCSSQMW

### Luminous Intensity Polar Plot

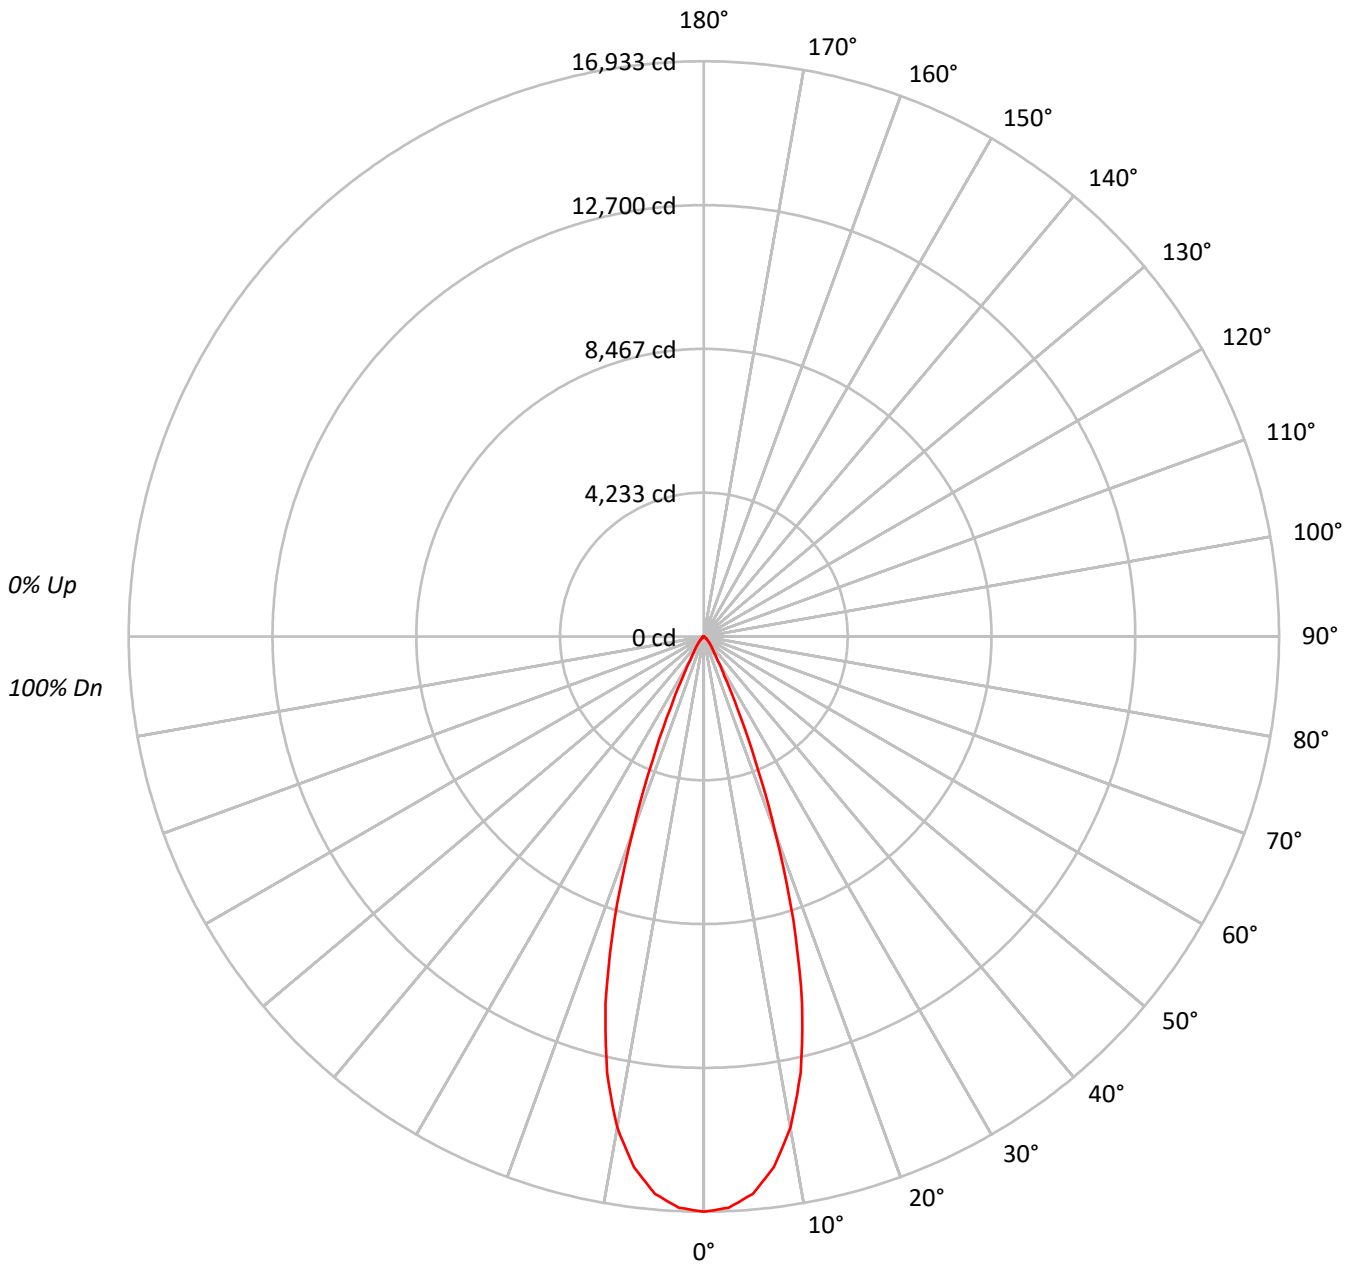



TEST NUMBER: P752298

CATALOG NUMBER: LD4D70BD010-EU4DR3570959027-4LBCSSQMW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96			
2	110	106	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92			
3	106	101	97	94	105	100	96	93	97	95	92	95	93	91	93	91	89	88			
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84			
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81			
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78			
7	93	85	81	78	91	85	80	77	84	80	77	83	79	77	82	79	76	75			
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72			
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70			
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1850101
5°	1806629
10°	1628259
15°	1263789
20°	716799
25°	278870
30°	104034
35°	57021
40°	37269
45°	22683
50°	14448
55°	10210
60°	7473
65°	4059
70°	288
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 22683 cd/sqm



TEST NUMBER: P752298

CATALOG NUMBER: LD4D70BD010-EU4DR3570959027-4LBCSSQMW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1514.9	24.6
10°-20°	2957.8	48.1
20°-30°	1206.3	19.6
30°-40°	288.7	4.7
40°-50°	120.3	2.0
50°-60°	49.8	0.8
60°-70°	15.6	0.3
70°-80°	0.4	0.0
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5679.1	92.3
0°-40°	5967.8	97.0
0°-60°	6137.9	99.7
0°-90°	6154.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6154.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	16933	
5°	16472	###
15°	11173	2958
25°	2313	1206
35°	428	289
45°	147	120
55°	54	50
65°	16	16
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P752298

CATALOG NUMBER: LD4D70BD010-EU4DR3570959027-4LBCSSQMW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	16932.9
2.5°	16831.4
5°	16472.1
7.5°	15755.6
10°	14676.1
12.5°	13156.1
15°	11172.6
17.5°	8746.7
20°	6164.8
22.5°	3931.0
25°	2313.2
27.5°	1307.6
30°	824.6
32.5°	579.0
35°	427.5
37.5°	330.6
40°	261.3
42.5°	201.3
45°	146.8
47.5°	109.9
50°	85.0
52.5°	67.4
55°	53.6
57.5°	43.4
60°	34.2
62.5°	24.9
65°	15.7
67.5°	5.5
70°	0.9
72.5°	0.9
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.9
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)