

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P753714

Luminaire Tested: LD4D80BD010-EU4DR2570959030-4LBCSSQMMS

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P753714  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-4)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D80BD010-EU4DR2570959030-4LBCSSQMMMS  
Description: 4 INCH SQAURE SHALLOW CAST MATTE METALLIC SILVER TRIM, WITH 25° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 6254.7 lumens  
Efficiency: N/A  
Efficacy: 79.3 lumens/watt  
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.45  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 78.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P753714  
CATALOG NUMBER: LD4D80BD010-EU4DR2570959030-4LBCSSQMMS

### Luminous Intensity Polar Plot

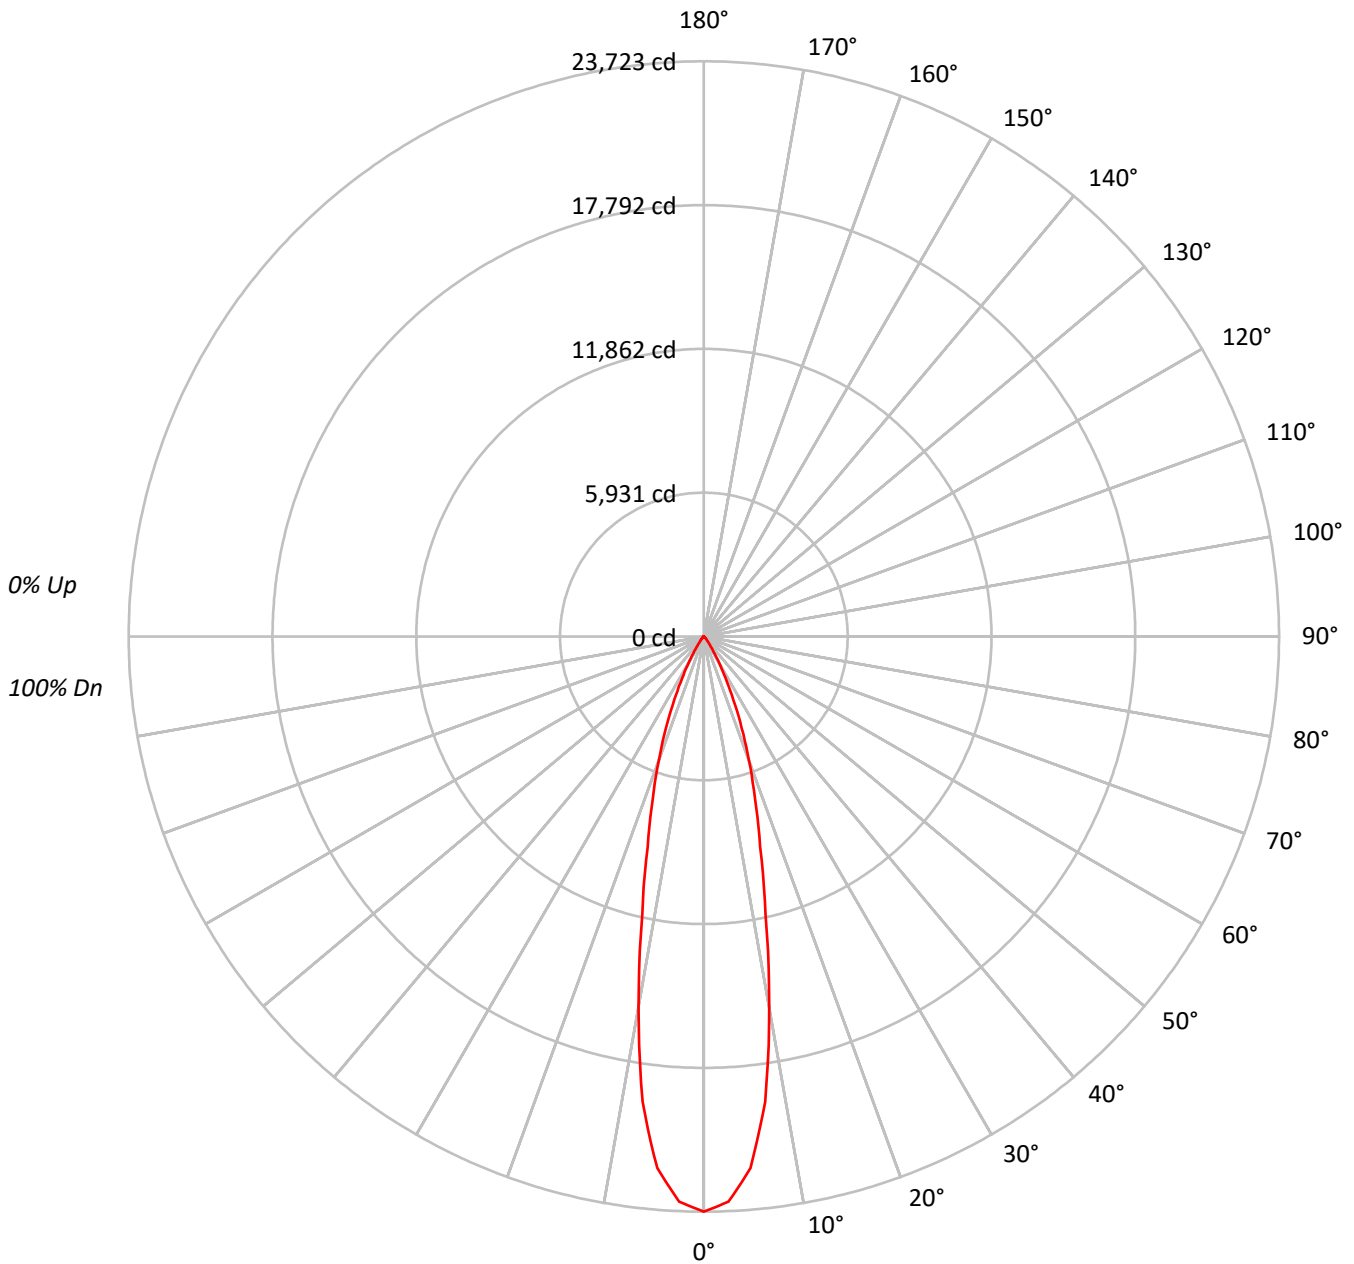



TEST NUMBER: P753714

CATALOG NUMBER: LD4D80BD010-EU4DR2570959030-4LBCSSQMMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96						96													
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92						92													
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89						89													
4	103	97	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85						85													
5	100	93	89	86	98	93	89	86	91	87	85	89	86	84	88	85	83	82						82													
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79						79													
7	93	87	82	79	92	86	82	79	85	81	78	84	80	78	83	80	78	77						77													
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74						74													
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72						72													
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69						69													

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	2591960
5°	2414081
10°	1722030
15°	1014212
20°	631059
25°	346321
30°	158386
35°	59982
40°	27171
45°	16333
50°	6782
55°	4362
60°	3059
65°	2068
70°	319
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 16333 cd/sqm



TEST NUMBER: P753714

CATALOG NUMBER: LD4D80BD010-EU4DR2570959030-4LBCSSQMMS

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1891.6	30.2
10°-20°	2562.1	41.0
20°-30°	1355.8	21.7
30°-40°	334.7	5.4
40°-50°	81.7	1.3
50°-60°	21.5	0.3
60°-70°	7.2	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5809.5	92.9
0°-40°	6144.2	98.2
0°-60°	6247.4	99.9
0°-90°	6254.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6254.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	23723	
5°	22011	###
15°	8966	2562
25°	2873	1356
35°	450	335
45°	106	82
55°	23	21
65°	8	7
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P753714

CATALOG NUMBER: LD4D80BD010-EU4DR2570959030-4LBCSSQMMS

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	23722.7
2.5°	23332.8
5°	22010.6
7.5°	19354.3
10°	15521.3
12.5°	11733.2
15°	8966.2
17.5°	6987.9
20°	5427.4
22.5°	4070.3
25°	2872.7
27.5°	1926.5
30°	1255.4
32.5°	763.8
35°	449.7
37.5°	275.2
40°	190.5
42.5°	145.6
45°	105.7
47.5°	63.8
50°	39.9
52.5°	28.9
55°	22.9
57.5°	17.9
60°	14.0
62.5°	11.0
65°	8.0
67.5°	3.0
70°	1.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)