

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P753893

Luminaire Tested: LD4D80BD010-EU4DR3570959035-4LBSQW1B

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P753893  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D80BD010-EU4DR3570959035-4LBSQW1B  
Description: 4 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 35° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 6294.6 lumens  
Efficiency: N/A  
Efficacy: 79.8 lumens/watt  
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 78.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P753893  
CATALOG NUMBER: LD4D80BD010-EU4DR3570959035-4LBSQW1B

### Luminous Intensity Polar Plot

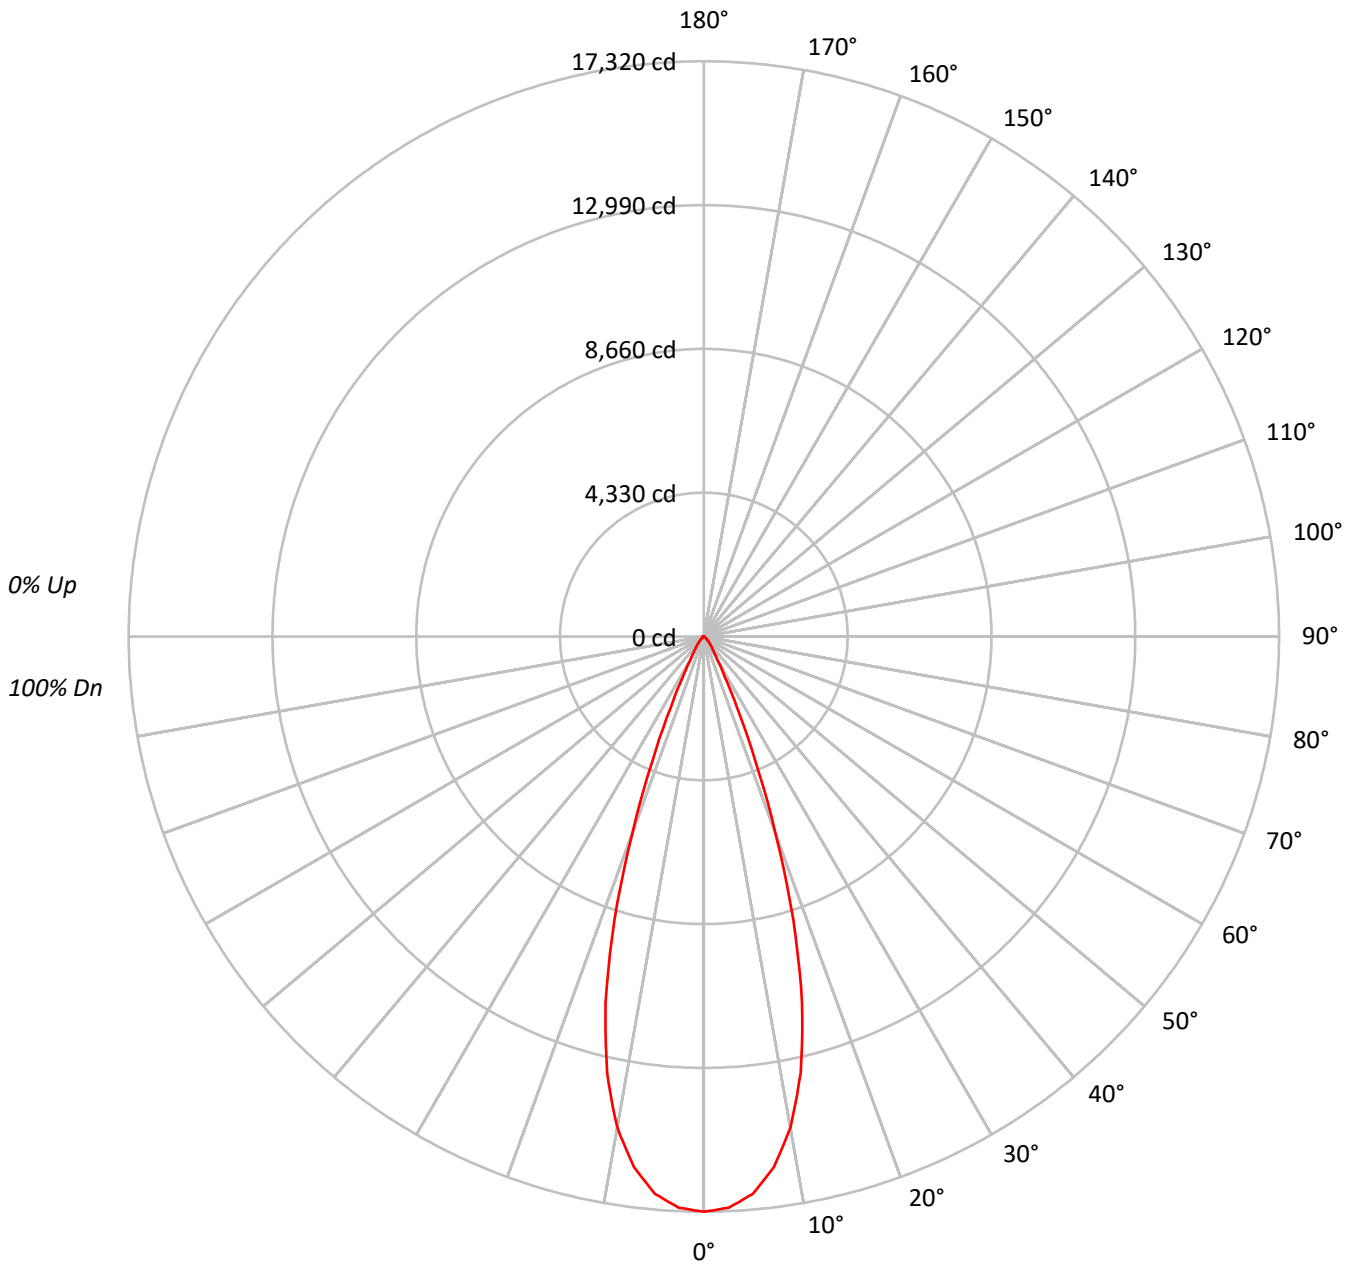



TEST NUMBER: P753893

CATALOG NUMBER: LD4D80BD010-EU4DR3570959035-4LBSQW1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96				96															
2	110	106	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92				92															
3	106	101	97	94	105	100	96	93	97	95	92	95	93	91	93	91	89	88				88															
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84				84															
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81				81															
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78				78															
7	93	85	81	78	91	85	80	77	84	80	77	83	79	77	82	79	76	75				75															
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72				72															
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70				70															
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68				68															

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1892363
5°	1847901
10°	1665448
15°	1292656
20°	733170
25°	285235
30°	106419
35°	58328
40°	38125
45°	23209
50°	14771
55°	10439
60°	7626
65°	4162
70°	288
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 23209 cd/sqm



TEST NUMBER: P753893

CATALOG NUMBER: LD4D80BD010-EU4DR3570959035-4LBSQW1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1549.6	24.6
10°-20°	3025.4	48.1
20°-30°	1233.9	19.6
30°-40°	295.3	4.7
40°-50°	123.1	2.0
50°-60°	50.9	0.8
60°-70°	16.0	0.3
70°-80°	0.4	0.0
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5808.8	92.3
0°-40°	6104.1	97.0
0°-60°	6278.1	99.7
0°-90°	6294.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6294.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	17320	
5°	16848	###
15°	11428	3025
25°	2366	1234
35°	437	295
45°	150	123
55°	55	51
65°	16	16
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P753893

CATALOG NUMBER: LD4D80BD010-EU4DR3570959035-4LBSQW1B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	17319.7
2.5°	17215.8
5°	16848.4
7.5°	16115.5
10°	15011.3
12.5°	13456.6
15°	11427.8
17.5°	8946.5
20°	6305.6
22.5°	4020.8
25°	2366.0
27.5°	1337.4
30°	843.5
32.5°	592.2
35°	437.3
37.5°	338.1
40°	267.3
42.5°	205.9
45°	150.2
47.5°	112.4
50°	86.9
52.5°	69.0
55°	54.8
57.5°	44.4
60°	34.9
62.5°	25.5
65°	16.1
67.5°	5.7
70°	0.9
72.5°	0.9
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.9
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)