

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P754117

Luminaire Tested: LD4D80BD010-EU4DR5070959035-4LBCSSQMMS

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P754117  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D80BD010-EU4DR5070959035-4LBCSSQMMMS  
Description: 4 INCH SQAURE SHALLOW CAST MATTE METALLIC SILVER TRIM, WITH 50° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7703.5 lumens  
Efficiency: N/A  
Efficacy: 97.6 lumens/watt  
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 78.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P754117

CATALOG NUMBER: LD4D80BD010-EU4DR5070959035-4LBCSSQMMS

### Luminous Intensity Polar Plot

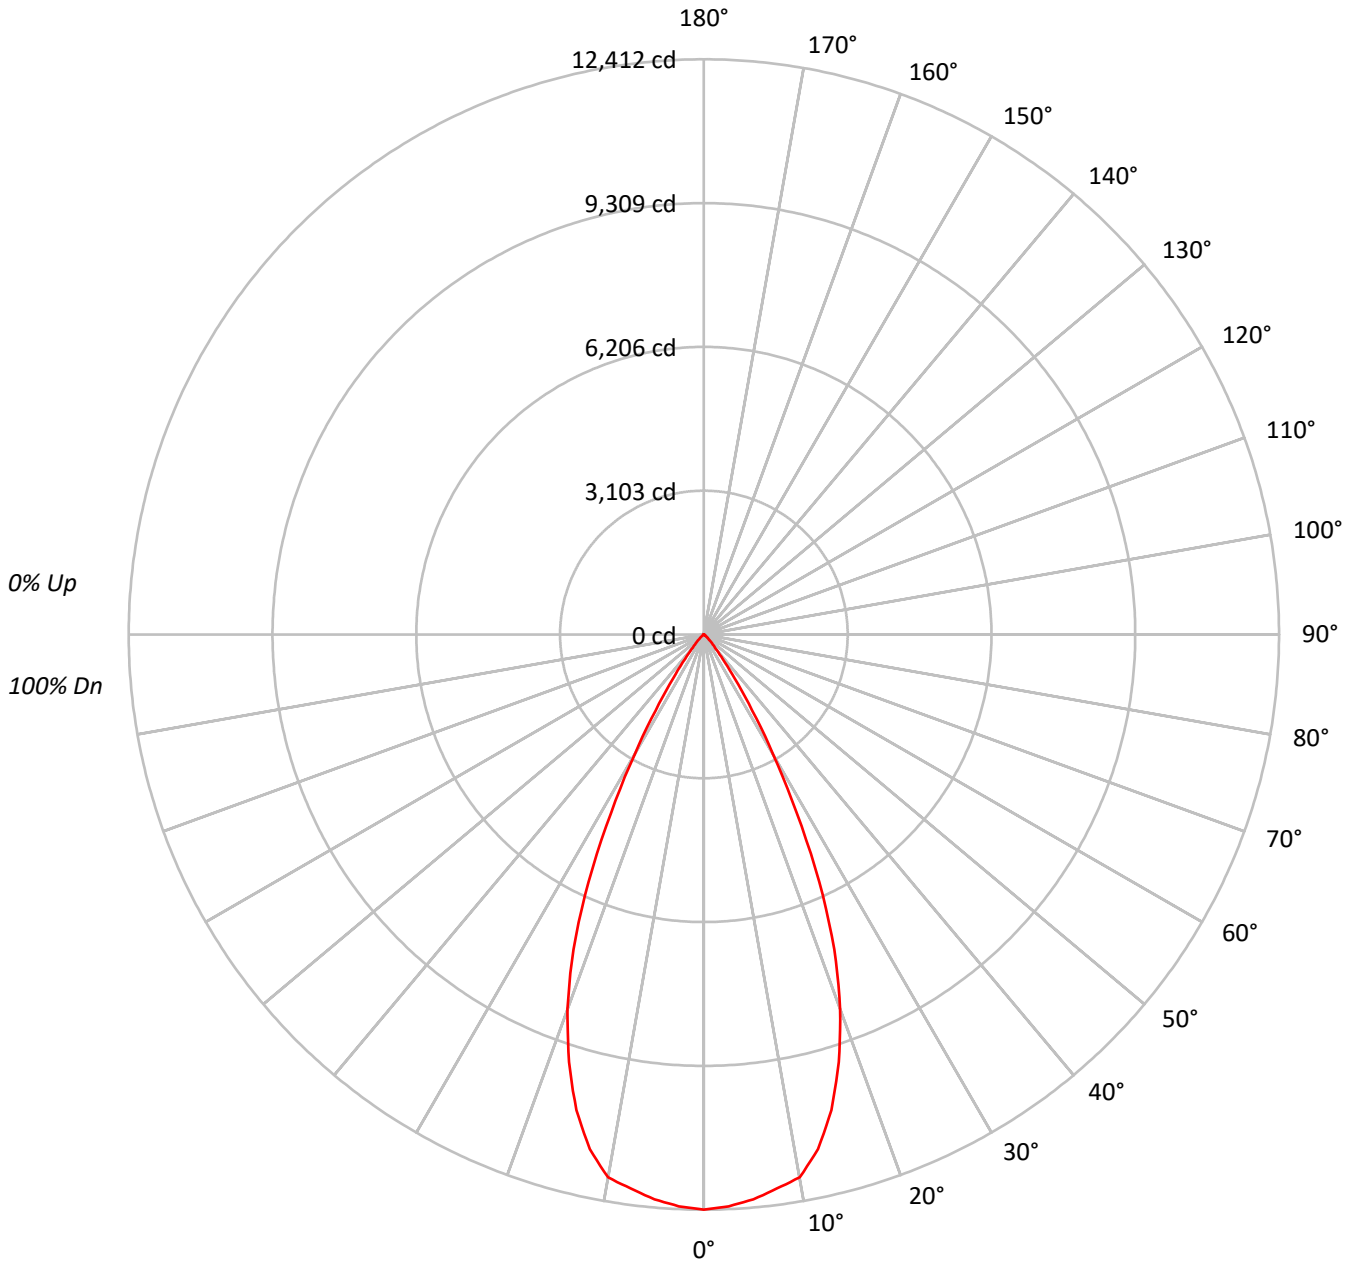



TEST NUMBER: P754117

CATALOG NUMBER: LD4D80BD010-EU4DR5070959035-4LBCSSQMMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	112	109	107	112	110	108	106	106	104	102	102	101	99	98	97	97	95																			
2	109	105	101	98	107	103	100	97	100	98	95	97	95	93	95	93	91	90																			
3	105	99	95	91	103	98	94	90	95	92	89	93	90	88	91	88	86	85																			
4	100	94	89	85	99	93	88	85	90	87	84	89	85	83	87	84	82	80																			
5	96	89	84	80	95	88	83	79	86	82	79	85	81	78	83	80	77	76																			
6	92	84	79	75	91	83	79	75	82	78	74	81	77	74	79	76	74	72																			
7	88	80	75	71	87	79	74	71	78	74	71	77	73	70	76	73	70	69																			
8	85	76	71	67	84	76	71	67	75	70	67	74	70	67	73	69	66	65																			
9	81	73	68	64	80	72	67	64	71	67	64	71	67	64	70	66	63	62																			
10	78	70	64	61	77	69	64	61	68	64	61	68	64	61	67	63	60	59																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1356166
5°	1341945
10°	1319850
15°	1201825
20°	1000051
25°	709893
30°	375753
35°	153123
40°	56866
45°	26036
50°	10675
55°	5581
60°	2753
65°	801
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 26036 cd/sqm



TEST NUMBER: P754117

CATALOG NUMBER: LD4D80BD010-EU4DR5070959035-4LBCSSQMMS

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1156.5	15.0
10°-20°	2922.7	37.9
20°-30°	2625.4	34.1
30°-40°	822.0	10.7
40°-50°	143.9	1.9
50°-60°	28.7	0.4
60°-70°	4.3	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6704.5	87.0
0°-40°	7526.5	97.7
0°-60°	7699.1	99.9
0°-90°	7703.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7703.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	12412	
5°	12235	###
15°	10625	2923
25°	5888	2625
35°	1148	822
45°	168	144
55°	29	29
65°	3	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P754117

CATALOG NUMBER: LD4D80BD010-EU4DR5070959035-4LBCSSQMMS

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	12412.2
2.5°	12350.5
5°	12235.3
7.5°	12059.5
10°	11896.3
12.5°	11373.0
15°	10624.8
17.5°	9674.6
20°	8600.9
22.5°	7358.8
25°	5888.5
27.5°	4329.3
30°	2978.3
32.5°	1939.1
35°	1148.0
37.5°	659.3
40°	398.7
42.5°	259.5
45°	168.5
47.5°	102.6
50°	62.8
52.5°	42.9
55°	29.3
57.5°	19.9
60°	12.6
62.5°	7.3
65°	3.1
67.5°	1.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)