

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P754767

Luminaire Tested: LD4D85BD010-EU4DR4070959050-4LBCSSQMMS

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P754767
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-28)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D85BD010-EU4DR4070959050-4LBCSSQMMMS
Description: 4 INCH SQAURE SHALLOW CAST MATTE METALLIC SILVER TRIM, WITH 40° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8495.4 lumens
Efficiency: N/A
Efficacy: 96.9 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.6
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 87.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P754767
CATALOG NUMBER: LD4D85BD010-EU4DR4070959050-4LBCSSQMMS

Luminous Intensity Polar Plot

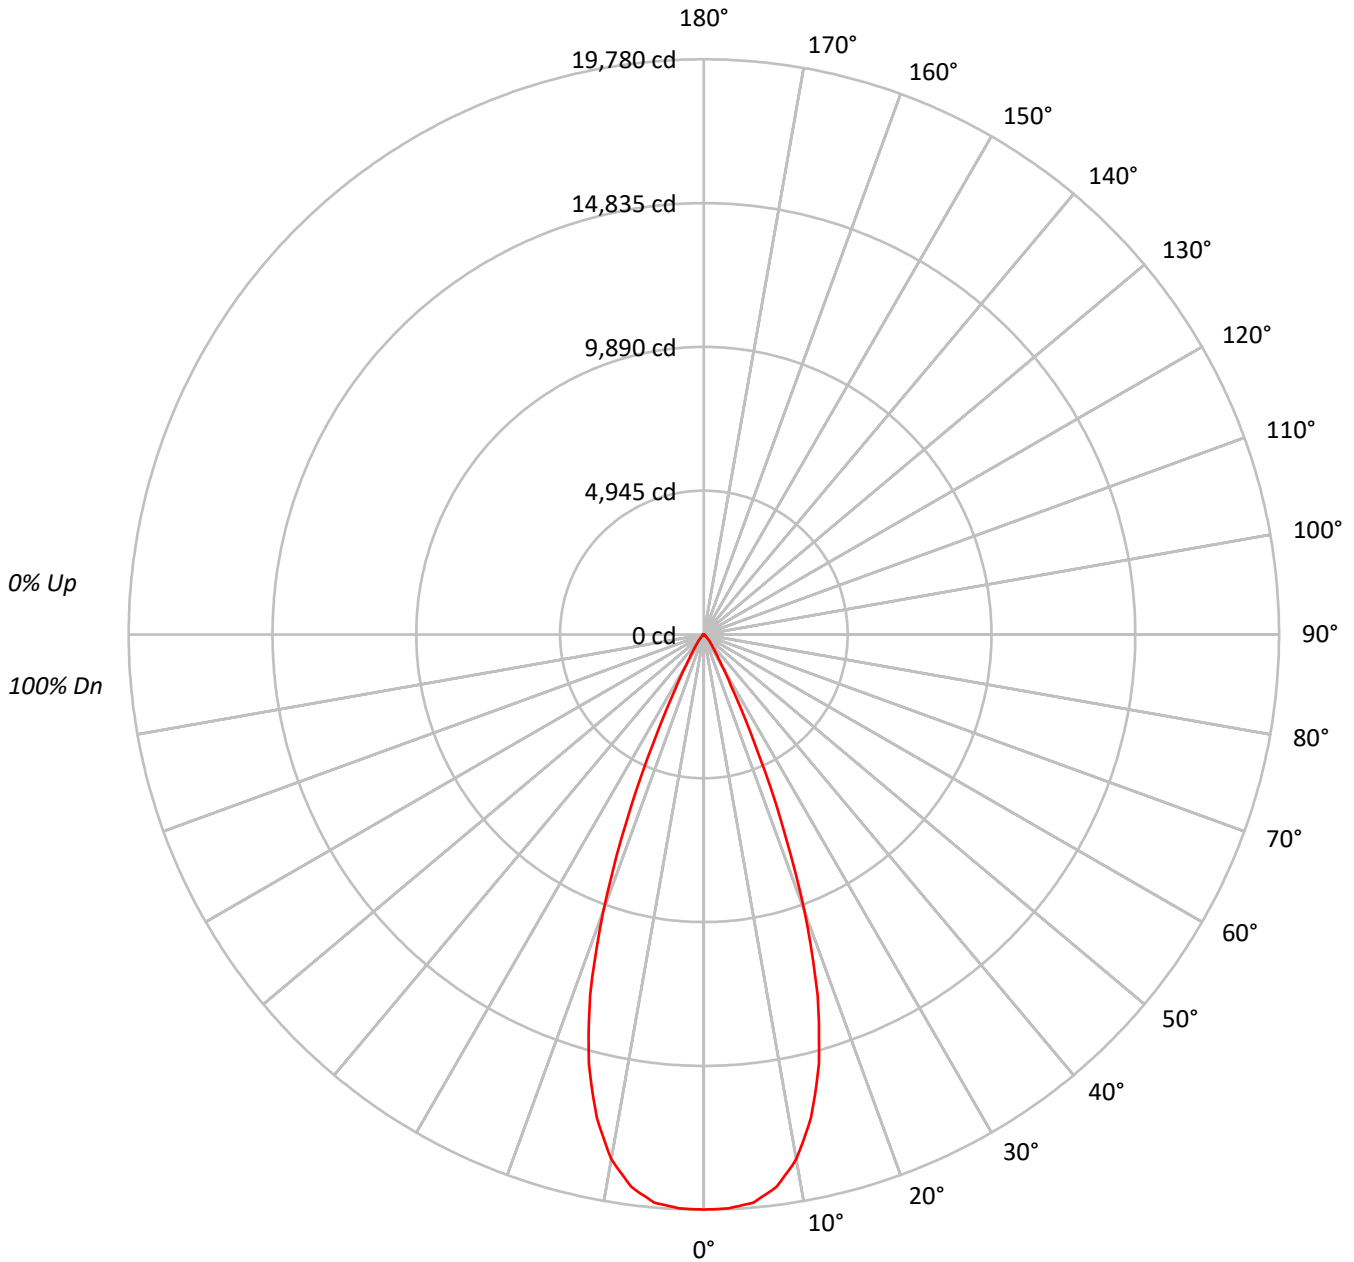



TEST NUMBER: P754767

CATALOG NUMBER: LD4D85BD010-EU4DR4070959050-4LBCSSQMMMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	97	96				96															
2	110	106	103	100	108	105	102	99	102	99	97	99	97	95	96	95	93	92				92															
3	106	101	97	94	104	100	96	93	97	94	92	95	93	90	93	91	89	88				88															
4	102	97	92	89	101	95	91	88	93	90	87	92	89	86	90	87	85	84				84															
5	99	92	88	84	97	91	87	84	90	86	83	88	85	83	87	84	82	81				81															
6	95	88	84	80	94	88	83	80	86	82	80	85	82	79	84	81	79	77				77															
7	92	85	80	77	91	84	80	77	83	79	76	82	79	76	81	78	76	74				74															
8	89	82	77	74	88	81	77	74	80	76	73	79	76	73	78	75	73	72				72															
9	86	79	74	71	85	78	74	71	77	73	71	76	73	70	76	72	70	69				69															
10	83	76	71	68	82	75	71	68	75	71	68	74	70	68	73	70	68	67				67															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2161123
5°	2150612
10°	2032802
15°	1728138
20°	1177856
25°	491446
30°	154525
35°	71827
40°	39722
45°	18218
50°	8839
55°	4838
60°	2535
65°	905
70°	383
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 18218 cd/sqm



TEST NUMBER: P754767

CATALOG NUMBER: LD4D85BD010-EU4DR4070959050-4LBCSSQMMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1830.9	21.6
10°-20°	4101.8	48.3
20°-30°	2053.2	24.2
30°-40°	376.4	4.4
40°-50°	103.9	1.2
50°-60°	24.4	0.3
60°-70°	4.7	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	7985.9	94.0
0°-40°	8362.3	98.4
0°-60°	8490.6	99.9
0°-90°	8495.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	8495.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	19780	
5°	19608	###
15°	15278	4102
25°	4076	2053
35°	538	376
45°	118	104
55°	25	24
65°	4	5
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P754767

CATALOG NUMBER: LD4D85BD010-EU4DR4070959050-4LBCSSQMMS

CANDELA DISTRIBUTION (FULL):

	0°
0°	19779.5
2.5°	19750.6
5°	19608.4
7.5°	19155.5
10°	18322.4
12.5°	17023.6
15°	15277.7
17.5°	13007.2
20°	10130.1
22.5°	6906.3
25°	4076.5
27.5°	2155.0
30°	1224.8
32.5°	791.5
35°	538.5
37.5°	384.8
40°	278.5
42.5°	190.7
45°	117.9
47.5°	75.1
50°	52.0
52.5°	37.0
55°	25.4
57.5°	16.2
60°	11.6
62.5°	6.9
65°	3.5
67.5°	2.3
70°	1.2
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)