

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P755895

Luminaire Tested: LD4D90BD010-EU4DR6570959027-4LBSQW1B

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P755895
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D90BD010-EU4DR6570959027-4LBSQW1B
Description: 4 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5594.2 lumens
Efficiency: N/A
Efficacy: 56.6 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 98.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P755895
CATALOG NUMBER: LD4D90BD010-EU4DR6570959027-4LBSQW1B

Luminous Intensity Polar Plot

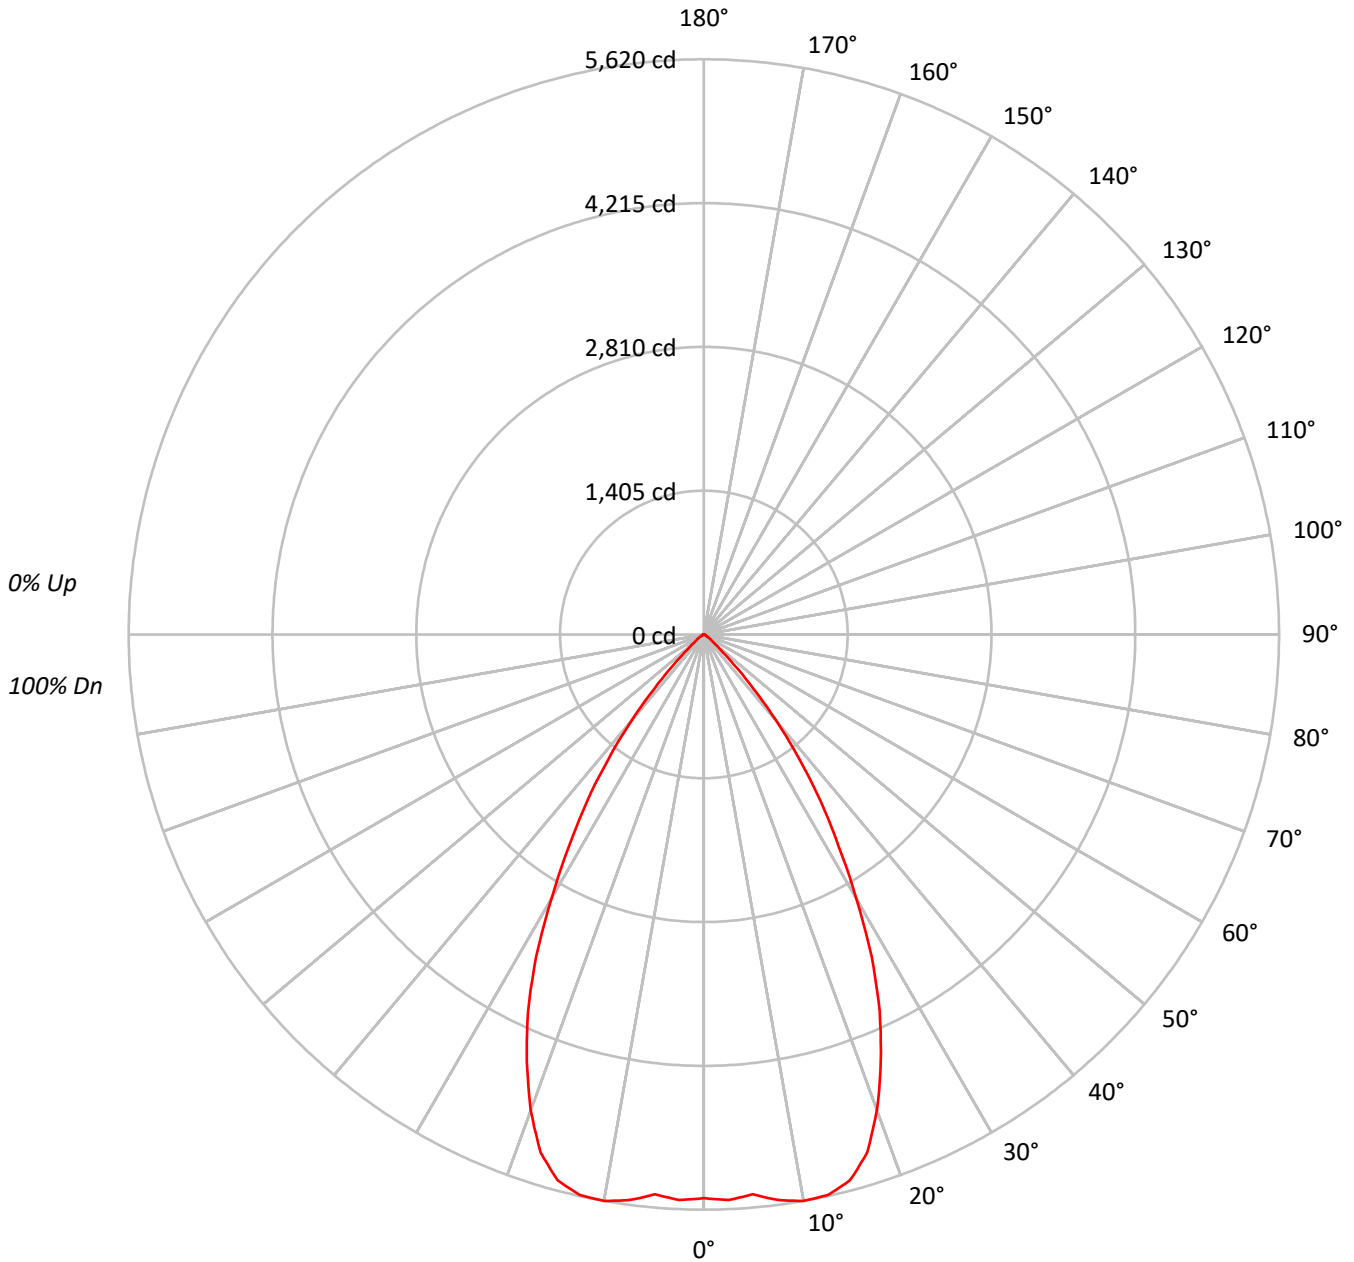



TEST NUMBER: P755895

CATALOG NUMBER: LD4D90BD010-EU4DR6570959027-4LBSQW1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93		
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87		
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80		
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75		
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69		
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65		
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60		
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57		
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53		
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	601797
5°	602297
10°	623496
15°	624531
20°	574981
25°	489915
30°	375046
35°	264965
40°	156408
45°	63491
50°	23015
55°	12820
60°	7364
65°	4059
70°	4249
75°	3293
80°	3461
85°	2883

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 63491 cd/sqm



TEST NUMBER: P755895

CATALOG NUMBER: LD4D90BD010-EU4DR6570959027-4LBSQW1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	530.4	9.5
10°-20°	1529.9	27.3
20°-30°	1835.5	32.8
30°-40°	1233.5	22.1
40°-50°	369.3	6.6
50°-60°	65.2	1.2
60°-70°	18.5	0.3
70°-80°	9.1	0.2
80°-90°	2.9	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3895.8	69.6
0°-40°	5129.3	91.7
0°-60°	5563.7	99.5
0°-90°	5594.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5594.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5508	
5°	5492	530
15°	5521	1530
25°	4064	1836
35°	1986	1234
45°	411	369
55°	67	65
65°	16	19
75°	8	9
85°	2	3
90°	0	



TEST NUMBER: P755895

CATALOG NUMBER: LD4D90BD010-EU4DR6570959027-4LBSQW1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	5507.9
2.5°	5531.4
5°	5491.5
7.5°	5574.4
10°	5619.8
12.5°	5608.9
15°	5521.2
17.5°	5306.7
20°	4945.1
22.5°	4519.3
25°	4063.8
27.5°	3549.6
30°	2972.7
32.5°	2449.9
35°	1986.5
37.5°	1528.6
40°	1096.6
42.5°	716.2
45°	410.9
47.5°	217.6
50°	135.4
52.5°	93.9
55°	67.3
57.5°	48.5
60°	33.7
62.5°	21.9
65°	15.7
67.5°	14.1
70°	13.3
72.5°	10.2
75°	7.8
77.5°	7.0
80°	5.5
82.5°	3.9
85°	2.3
87.5°	1.6
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)