

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P756455

Luminaire Tested: LD4D95BD010-EU4DR5070959030-4LBSQW1MW

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P756455
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D95BD010-EU4DR5070959030-4LBSQW1MW
Description: 4 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 50° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8449.9 lumens
Efficiency: N/A
Efficacy: 85.2 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 99.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P756455
CATALOG NUMBER: LD4D95BD010-EU4DR5070959030-4LBSQW1MW

Luminous Intensity Polar Plot

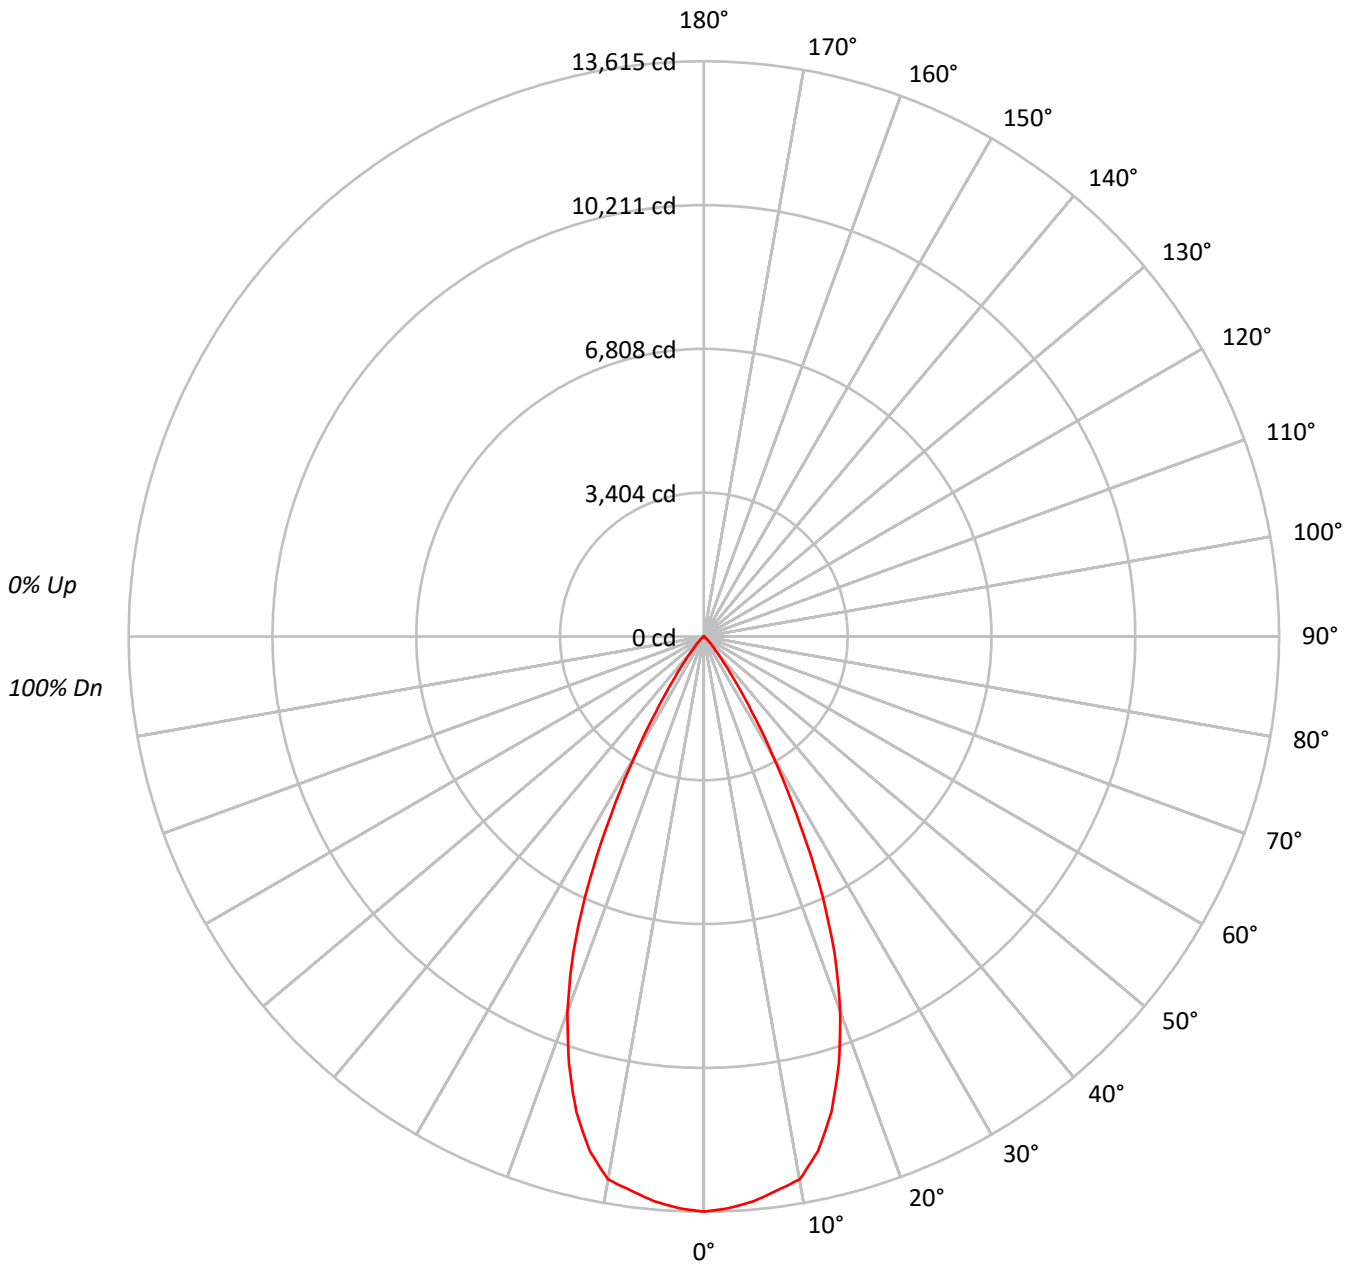



TEST NUMBER: P756455

CATALOG NUMBER: LD4D95BD010-EU4DR5070959030-4LBSQW1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	114	112	109	107	112	110	108	106	106	104	102	102	101	99	98	97	97	95						95													
2	109	105	101	98	107	103	100	97	100	98	95	97	95	93	95	93	91	90						90													
3	105	99	95	91	103	98	94	90	95	92	89	93	90	88	91	88	86	85						85													
4	100	94	89	85	99	93	88	85	90	87	84	89	85	83	87	84	82	80						80													
5	96	89	84	80	95	88	83	79	86	82	79	85	81	78	83	80	77	76						76													
6	92	84	79	75	91	83	79	75	82	78	74	81	77	74	79	76	74	72						72													
7	88	80	75	71	87	79	74	71	78	74	71	77	73	70	76	73	70	69						69													
8	85	76	71	67	84	76	71	67	75	70	67	74	70	67	73	69	66	65						65													
9	81	73	68	64	80	72	67	64	71	67	64	71	67	64	70	66	63	62						62													
10	78	70	64	61	77	69	64	61	68	64	61	68	64	61	67	63	60	59						59													

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1487574
5°	1471990
10°	1447738
15°	1318288
20°	1096965
25°	778683
30°	412163
35°	167956
40°	62372
45°	28555
50°	11712
55°	6115
60°	3016
65°	879
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 28555 cd/sqm



TEST NUMBER: P756455

CATALOG NUMBER: LD4D95BD010-EU4DR5070959030-4LBSQW1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1268.5	15.0
10°-20°	3205.9	37.9
20°-30°	2879.8	34.1
30°-40°	901.6	10.7
40°-50°	157.9	1.9
50°-60°	31.5	0.4
60°-70°	4.7	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	7354.2	87.0
0°-40°	8255.8	97.7
0°-60°	8445.2	99.9
0°-90°	8449.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	8449.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	13615	
5°	13421	###
15°	11654	3206
25°	6459	2880
35°	1259	902
45°	185	158
55°	32	31
65°	3	5
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P756455

CATALOG NUMBER: LD4D95BD010-EU4DR5070959030-4LBSQW1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	13614.9
2.5°	13547.2
5°	13421.0
7.5°	13228.1
10°	13049.0
12.5°	12475.1
15°	11654.4
17.5°	10612.1
20°	9434.4
22.5°	8071.9
25°	6459.1
27.5°	4748.8
30°	3266.9
32.5°	2127.0
35°	1259.2
37.5°	723.2
40°	437.3
42.5°	284.7
45°	184.8
47.5°	112.5
50°	68.9
52.5°	47.1
55°	32.1
57.5°	21.8
60°	13.8
62.5°	8.0
65°	3.4
67.5°	1.1
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)