

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P207298

Luminaire Tested: **LD4B50D010TE EU4B30509024 4LBMWH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P207298
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B50D010TE EU4B30509024 4LBMWH1
Description: PORTFOLIO 4 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH WHEAT TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2884.9 lumens
Efficiency: N/A
Efficacy: 49.1 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.87
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 58.77
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P207298

CATALOG NUMBER: LD4B50D010TE EU4B30509024 4LBMWH1

Luminous Intensity Polar Plot

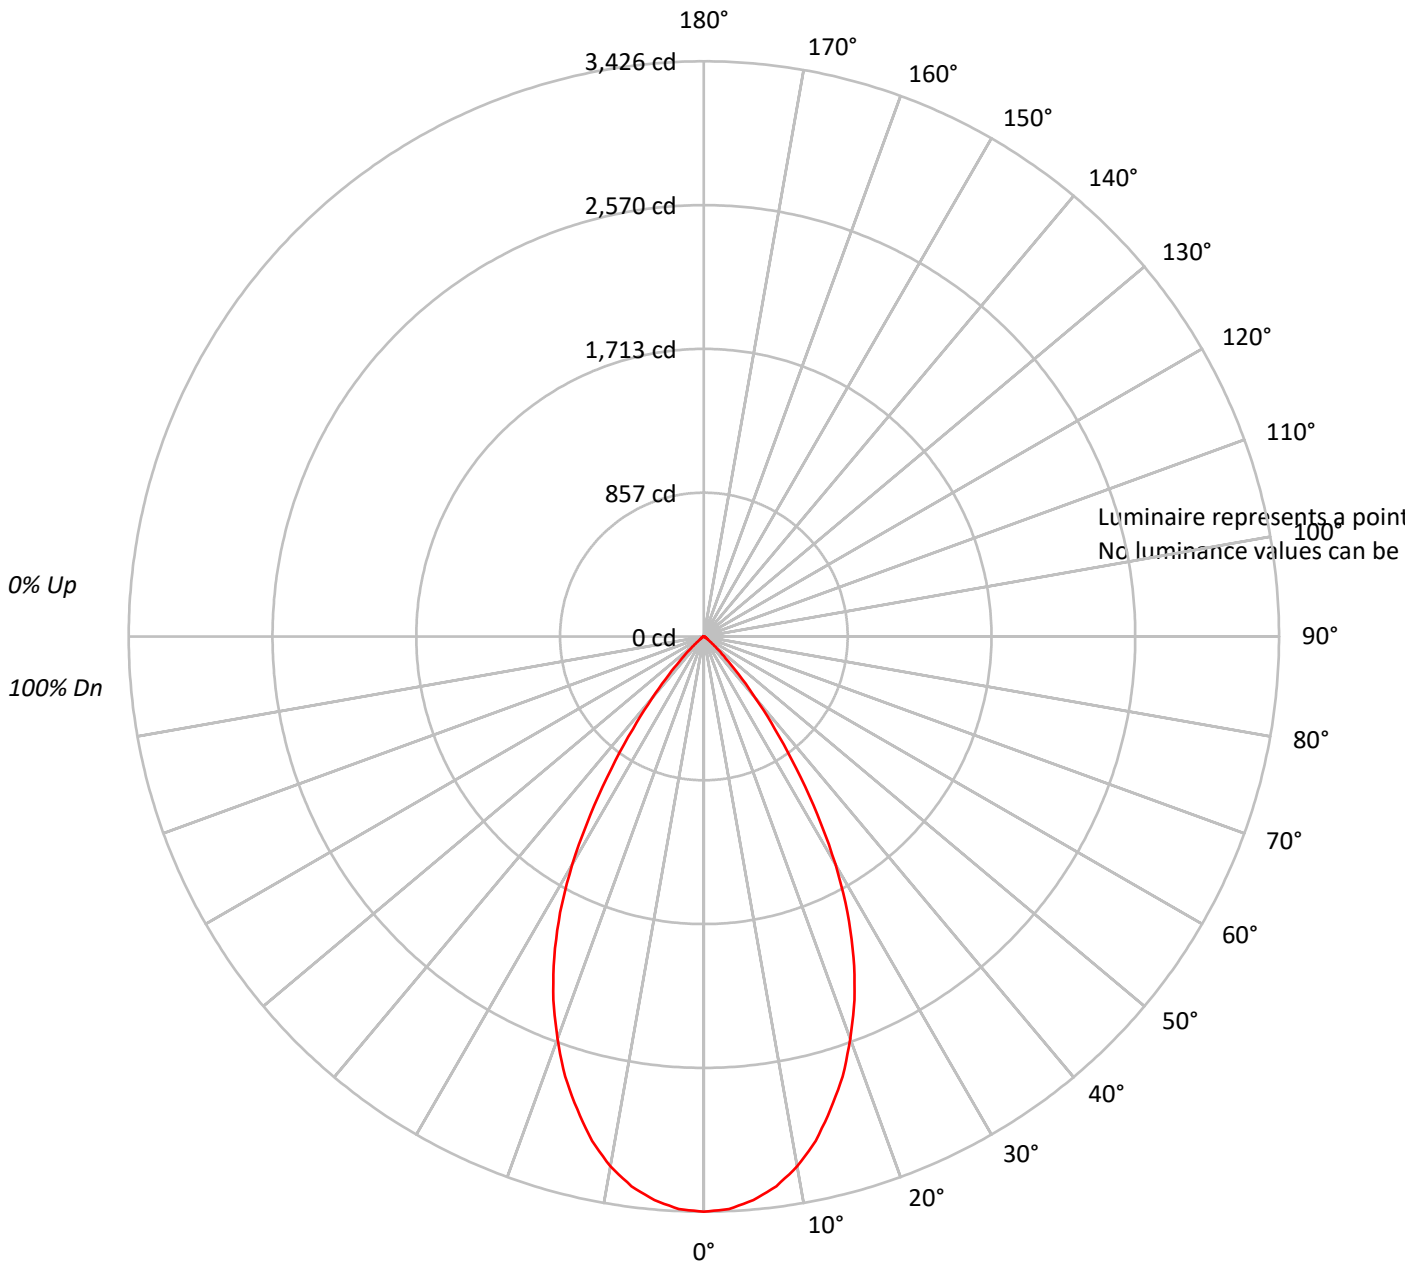



TEST NUMBER: P207298

CATALOG NUMBER: LD4B50D010TE EU4B30509024 4LBMWH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	108	106	111	109	106	105	105	103	101	101	100	98	98	96	95	94			
2	108	103	99	96	106	102	98	95	98	95	93	95	93	91	93	91	89	87			
3	103	96	91	88	101	95	90	87	92	89	85	90	87	84	88	85	83	81			
4	98	90	85	81	96	89	84	80	87	83	79	85	81	78	83	80	77	76			
5	93	84	79	74	91	84	78	74	82	77	73	80	76	73	79	75	72	71			
6	88	79	73	69	87	79	73	69	77	72	68	76	71	68	74	71	68	66			
7	84	75	69	65	82	74	68	64	73	68	64	72	67	64	70	66	63	62			
8	80	70	64	60	79	70	64	60	69	64	60	68	63	60	67	63	59	58			
9	76	66	61	57	75	66	60	57	65	60	56	64	60	56	63	59	56	55			
10	73	63	57	53	72	62	57	53	62	57	53	61	56	53	60	56	53	52			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P207298

CATALOG NUMBER: LD4B50D010TE EU4B30509024 4LBMWH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	316.5	11.0
10°-20°	813.8	28.2
20°-30°	954.7	33.1
30°-40°	604.2	20.9
40°-50°	161.8	5.6
50°-60°	22.6	0.8
60°-70°	8.4	0.3
70°-80°	2.8	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2085.1	72.3
0°-40°	2689.3	93.2
0°-60°	2873.7	99.6
0°-90°	2884.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2884.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3426	
5°	3371	317
15°	2915	814
25°	2110	955
35°	959	604
45°	183	162
55°	21	23
65°	8	8
75°	4	3
85°	0	0
90°	0	



TEST NUMBER: P207298

CATALOG NUMBER: LD4B50D010TE EU4B30509024 4LBMWH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	3426.3
2.5°	3413.5
5°	3370.9
7.5°	3302.7
10°	3204.7
12.5°	3076.8
15°	2914.9
17.5°	2748.7
20°	2548.4
22.5°	2343.8
25°	2109.5
27.5°	1853.8
30°	1568.2
32.5°	1257.2
35°	958.8
37.5°	694.6
40°	477.3
42.5°	306.8
45°	183.2
47.5°	102.3
50°	55.4
52.5°	29.8
55°	21.3
57.5°	17.0
60°	12.8
62.5°	12.8
65°	8.5
67.5°	4.3
70°	4.3
72.5°	4.3
75°	4.3
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)