

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P208218

Luminaire Tested: **LD4B50D010TE EU4B30508035 4LBMLI1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P208218
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LD4B50D010TE EU4B30508035 4LBML1
Description: PORTFOLIO 4 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH SPECULAR CLEAR TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5002.0 lumens
Efficiency: N/A
Efficacy: 85.1 lumens/watt
Spacing Criteria (0/90/45): 0.7 / 0.7 / 0.76
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 58.77
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P208218

CATALOG NUMBER: LD4B50D010TE EU4B30508035 4LBMLI1

Luminous Intensity Polar Plot

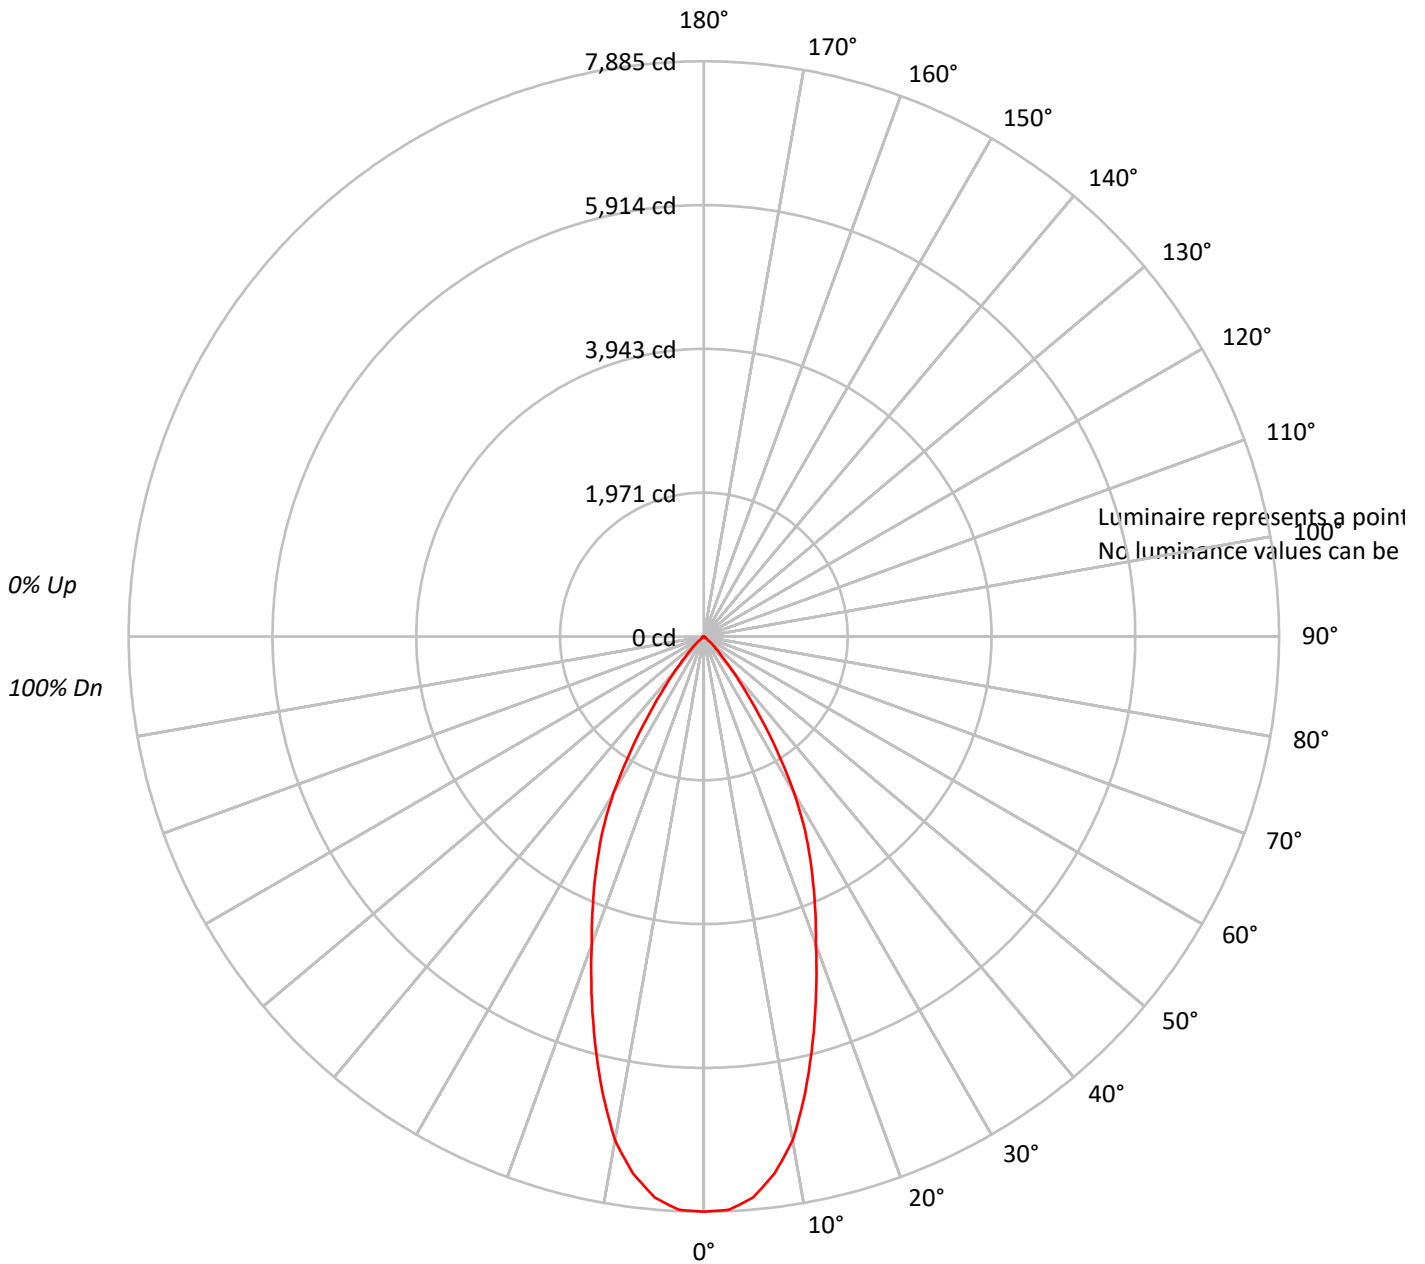




TEST NUMBER: P208218

CATALOG NUMBER: LD4B50D010TE EU4B30508035 4LBMLI1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94					94			
2	109	104	100	97	107	102	99	96	99	96	94	96	94	92	94	92	90	88					88			
3	104	98	93	89	102	96	92	89	94	90	87	91	88	86	89	87	85	83					83			
4	99	92	87	83	97	91	86	82	89	85	81	87	83	80	85	82	79	78					78			
5	94	87	81	77	93	86	81	77	84	79	76	82	78	75	81	77	75	73					73			
6	90	82	76	72	89	81	76	72	80	75	71	78	74	71	77	73	71	69					69			
7	86	77	72	68	85	77	71	68	75	71	67	74	70	67	73	69	67	65					65			
8	82	73	68	64	81	73	67	64	72	67	64	71	66	63	70	66	63	62					62			
9	79	70	64	60	78	69	64	60	68	63	60	67	63	60	67	63	60	58					58			
10	75	66	61	57	74	66	61	57	65	60	57	64	60	57	64	60	57	56					56			

AVERAGE LUMINANCE (cd/sqm):

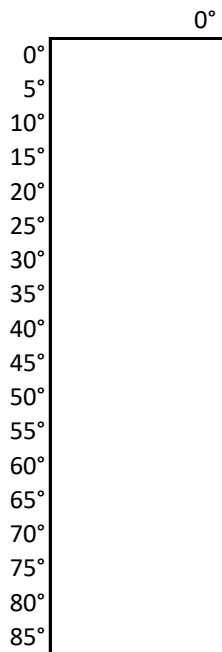



TEST NUMBER: P208218

CATALOG NUMBER: LD4B50D010TE EU4B30508035 4LBMLI1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	714.0	14.3
10°-20°	1596.2	31.9
20°-30°	1586.9	31.7
30°-40°	864.2	17.3
40°-50°	199.7	4.0
50°-60°	28.2	0.6
60°-70°	10.5	0.2
70°-80°	2.4	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3897.1	77.9
0°-40°	4761.3	95.2
0°-60°	4989.2	99.7
0°-90°	5002.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5002.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7885	
5°	7722	714
15°	5761	1596
25°	3480	1587
35°	1337	864
45°	230	200
55°	30	28
65°	12	10
75°	0	2
85°	0	0
90°	0	



TEST NUMBER: P208218

CATALOG NUMBER: LD4B50D010TE EU4B30508035 4LBMLI1

CANDELA DISTRIBUTION (FULL):

	0°
0°	7885.4
2.5°	7867.2
5°	7722.0
7.5°	7425.5
10°	7013.9
12.5°	6408.8
15°	5761.2
17.5°	5119.8
20°	4490.4
22.5°	3976.0
25°	3479.7
27.5°	3007.7
30°	2475.2
32.5°	1882.1
35°	1337.4
37.5°	901.7
40°	587.0
42.5°	369.2
45°	230.0
47.5°	133.1
50°	66.6
52.5°	36.3
55°	30.3
57.5°	18.2
60°	18.2
62.5°	12.1
65°	12.1
67.5°	6.1
70°	6.1
72.5°	6.1
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)