

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P208024

Luminaire Tested: **LD4B50D010TE EU4B30509050 4LBNMW1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P208024  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LD4B50D010TE EU4B30509050 4LBNMW1  
Description: PORTFOLIO 4 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT  
NARROW DISTRIBUTION WITH MATTE WHITE TRIM  
SINGLE DRIVER D010TE  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3232.7 lumens  
Efficiency: N/A  
Efficacy: 55.0 lumens/watt  
Spacing Criteria (0/90/45): 0.96 / 0.96 / 0.95  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 58.77  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P208024

CATALOG NUMBER: LD4B50D010TE EU4B30509050 4LBNMW1

### Luminous Intensity Polar Plot

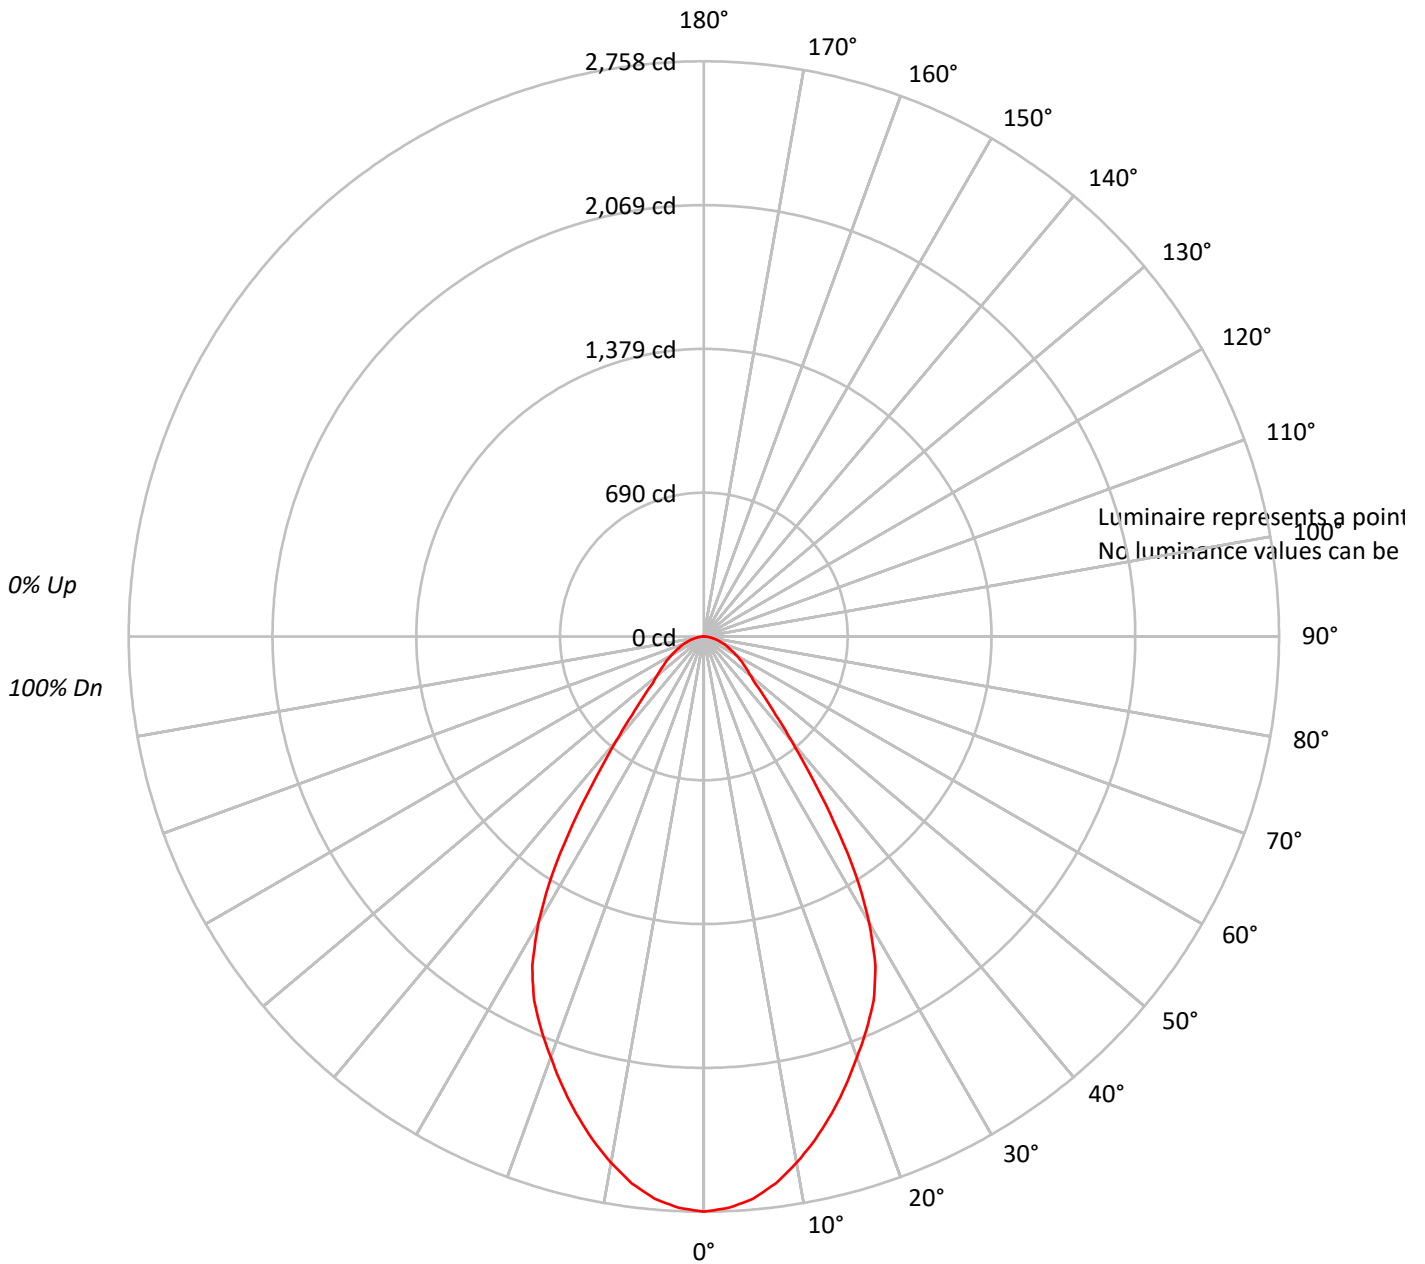



TEST NUMBER: P208024

CATALOG NUMBER: LD4B50D010TE EU4B30509050 4LBNMW1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	109	105	103	109	106	104	101	102	100	98	98	97	95	95	94	92	90			
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81			
3	98	90	84	80	96	89	83	79	86	82	78	84	80	76	81	78	75	73			
4	92	83	76	71	90	82	76	71	80	74	70	78	73	69	76	72	68	67			
5	87	77	70	65	85	76	69	64	74	68	64	72	67	63	70	66	63	61			
6	82	71	64	59	80	70	64	59	69	63	58	67	62	58	66	61	58	56			
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	62	57	53	52			
8	73	62	55	50	71	61	55	50	60	54	50	59	53	49	58	53	49	48			
9	69	58	51	46	68	57	51	46	56	50	46	55	50	46	54	49	46	44			
10	65	54	48	43	64	54	47	43	53	47	43	52	47	43	51	46	43	41			

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P208024

CATALOG NUMBER: LD4B50D010TE EU4B30509050 4LBNMW1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	253.7	7.8
10°-20°	663.8	20.5
20°-30°	873.7	27.0
30°-40°	680.1	21.0
40°-50°	330.3	10.2
50°-60°	208.7	6.5
60°-70°	134.6	4.2
70°-80°	70.4	2.2
80°-90°	17.4	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1791.2	55.4
0°-40°	2471.3	76.4
0°-60°	3010.2	93.1
0°-90°	3232.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3232.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2758	
5°	2706	254
15°	2367	664
25°	1926	874
35°	1089	680
45°	411	330
55°	231	209
65°	134	135
75°	67	70
85°	15	17
90°	0	



TEST NUMBER: P208024

CATALOG NUMBER: LD4B50D010TE EU4B30509050 4LBNMW1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2757.7
2.5°	2742.3
5°	2706.4
7.5°	2644.8
10°	2562.6
12.5°	2470.1
15°	2367.4
17.5°	2259.6
20°	2146.6
22.5°	2038.8
25°	1925.8
27.5°	1782.0
30°	1586.9
32.5°	1355.8
35°	1088.7
37.5°	842.2
40°	652.2
42.5°	508.4
45°	410.8
47.5°	333.8
50°	292.7
52.5°	261.9
55°	231.1
57.5°	205.4
60°	179.7
62.5°	154.1
65°	133.5
67.5°	118.1
70°	97.6
72.5°	82.2
75°	66.8
77.5°	51.4
80°	35.9
82.5°	25.7
85°	15.4
87.5°	5.1
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)