

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P858374

Luminaire Tested: **LD4C15W2N2050D010 4LBNLI\_2700K**

Issue Date: 11/9/2023



**Test Information**

Test Method: LM-79-08  
Report Number: P858374  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208279)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 11/9/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD4C15W2N2050D010 4LBNLI\_2700K  
Description: 4 INCH 1500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 2700K, W2N2050 LEDS  
AND 4LBNLI TRIM WITH FINISH  
  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 954.0 lumens  
Efficiency: N/A  
Efficacy: 49.7 lumens/watt  
Spacing Criteria (0/90/45): 0.48 / 0.48 / 0.54  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct

Input Watts (W): 19.2  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P858374

CATALOG NUMBER: LD4C15W2N2050D010 4LBNLI\_2700K

### Luminous Intensity Polar Plot

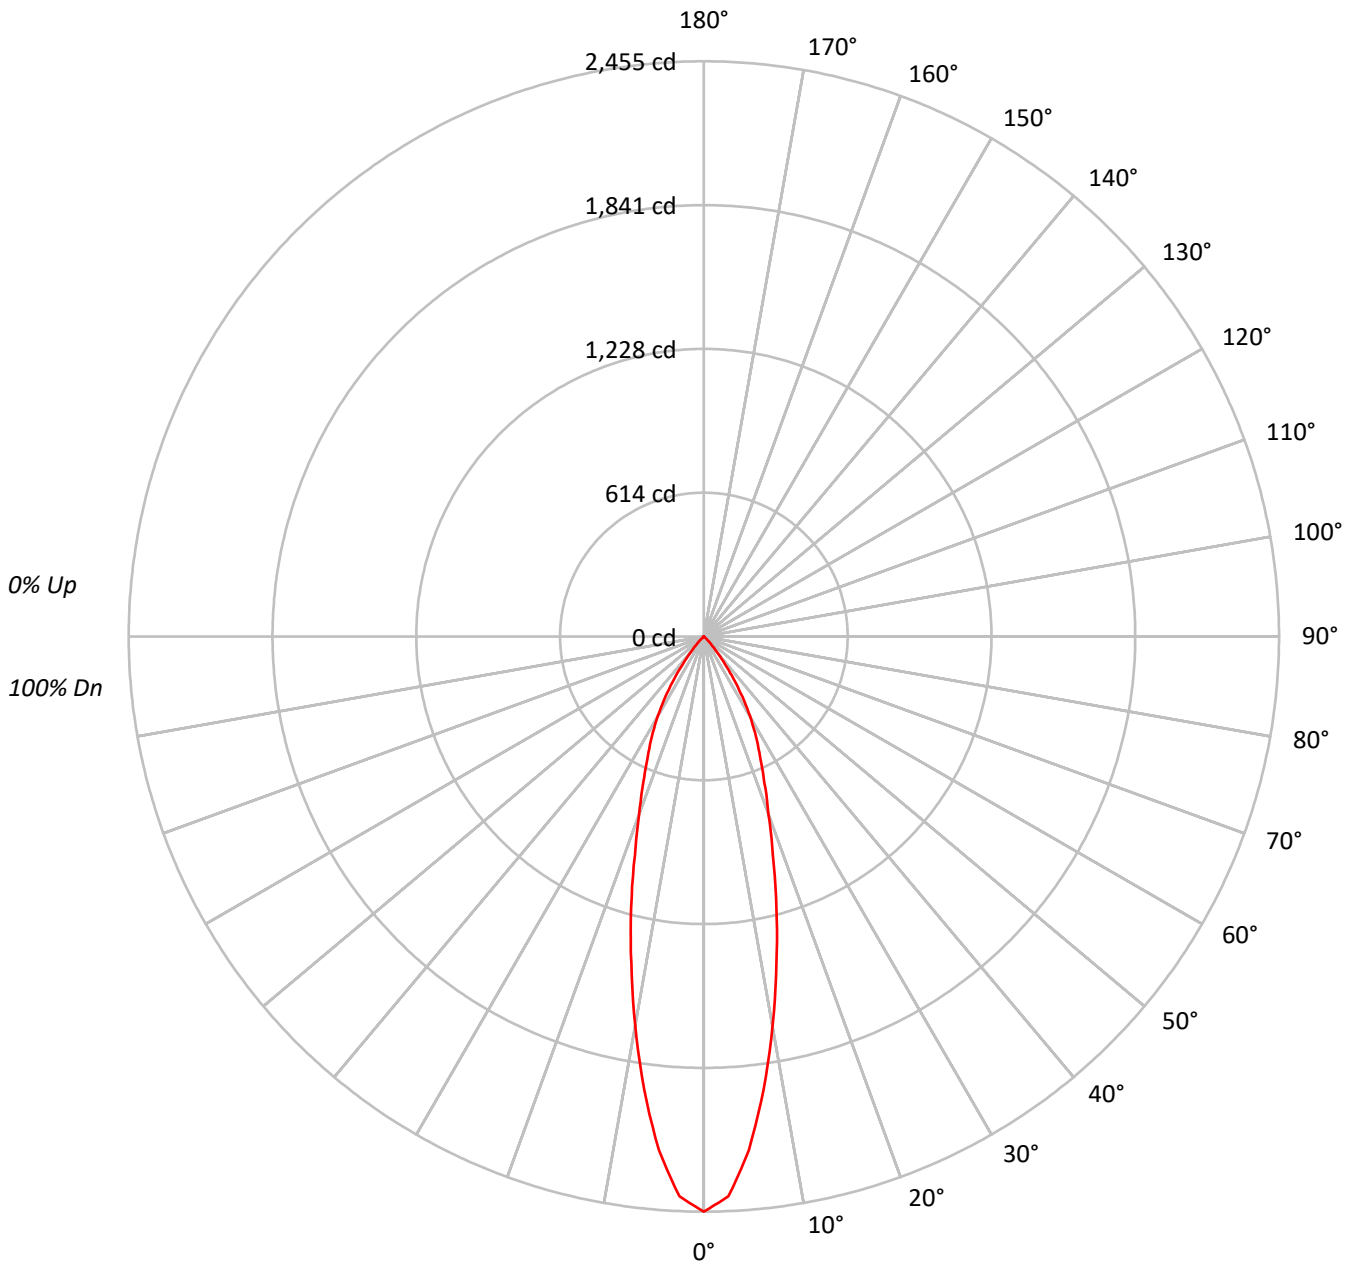



TEST NUMBER: P858374

CATALOG NUMBER: LD4C15W2N2050D010 4LBNLI\_2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	92	90	90	90	90
3	105	99	95	92	103	98	94	91	95	92	89	93	90	88	91	89	87	85	85	85	85
4	101	94	89	86	99	93	88	85	91	87	84	89	86	83	87	84	82	81	81	81	81
5	96	89	84	80	95	88	84	80	87	82	79	85	81	79	83	80	78	77	77	77	77
6	92	85	80	76	91	84	79	76	83	78	75	81	78	75	80	77	74	73	73	73	73
7	89	81	76	72	88	80	75	72	79	75	71	78	74	71	77	73	71	69	69	69	69
8	85	77	72	68	84	77	72	68	76	71	68	75	71	68	74	70	67	66	66	66	66
9	82	74	69	65	81	73	68	65	72	68	65	72	68	65	71	67	64	63	63	63	63
10	79	71	66	62	78	70	65	62	69	65	62	69	65	62	68	64	62	61	61	61	61

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	301605
5°	271421
10°	210414
15°	152294
20°	105453
25°	76873
30°	55864
35°	33055
40°	13904
45°	4326
50°	554
55°	321
60°	369
65°	436
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P858374

CATALOG NUMBER: LD4C15W2N2050D010 4LBNLI\_2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	193.5	20.3
10°-20°	331.2	34.7
20°-30°	263.2	27.6
30°-40°	139.4	14.6
40°-50°	24.0	2.5
50°-60°	1.8	0.2
60°-70°	0.9	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	787.9	82.6
0°-40°	927.3	97.2
0°-60°	953.1	99.9
0°-90°	954.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	954.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2455	
5°	2201	193
15°	1197	331
25°	567	263
35°	220	139
45°	25	24
55°	2	2
65°	2	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P858374

CATALOG NUMBER: LD4C15W2N2050D010 4LBNLI\_2700K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2455.0
2.5°	2391.8
5°	2200.9
7.5°	1951.1
10°	1686.7
12.5°	1431.0
15°	1197.4
17.5°	979.9
20°	806.6
22.5°	674.3
25°	567.1
27.5°	480.4
30°	393.8
32.5°	305.6
35°	220.4
37.5°	145.5
40°	86.7
42.5°	50.0
45°	24.9
47.5°	8.8
50°	2.9
52.5°	2.9
55°	1.5
57.5°	1.5
60°	1.5
62.5°	1.5
65°	1.5
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)