

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P777322

Luminaire Tested: LERS4D05D010-EC4DR200210IC9027-4LBS1LI

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P777322
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LERS4D05D010-EC4DR200210IC9027-4LBS1LI
Description: 4 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 20° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 720.7 lumens
Efficiency: N/A
Efficacy: 96.1 lumens/watt
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P777322

CATALOG NUMBER: LERS4D05D010-EC4DR200210IC9027-4LBS1LI

Luminous Intensity Polar Plot

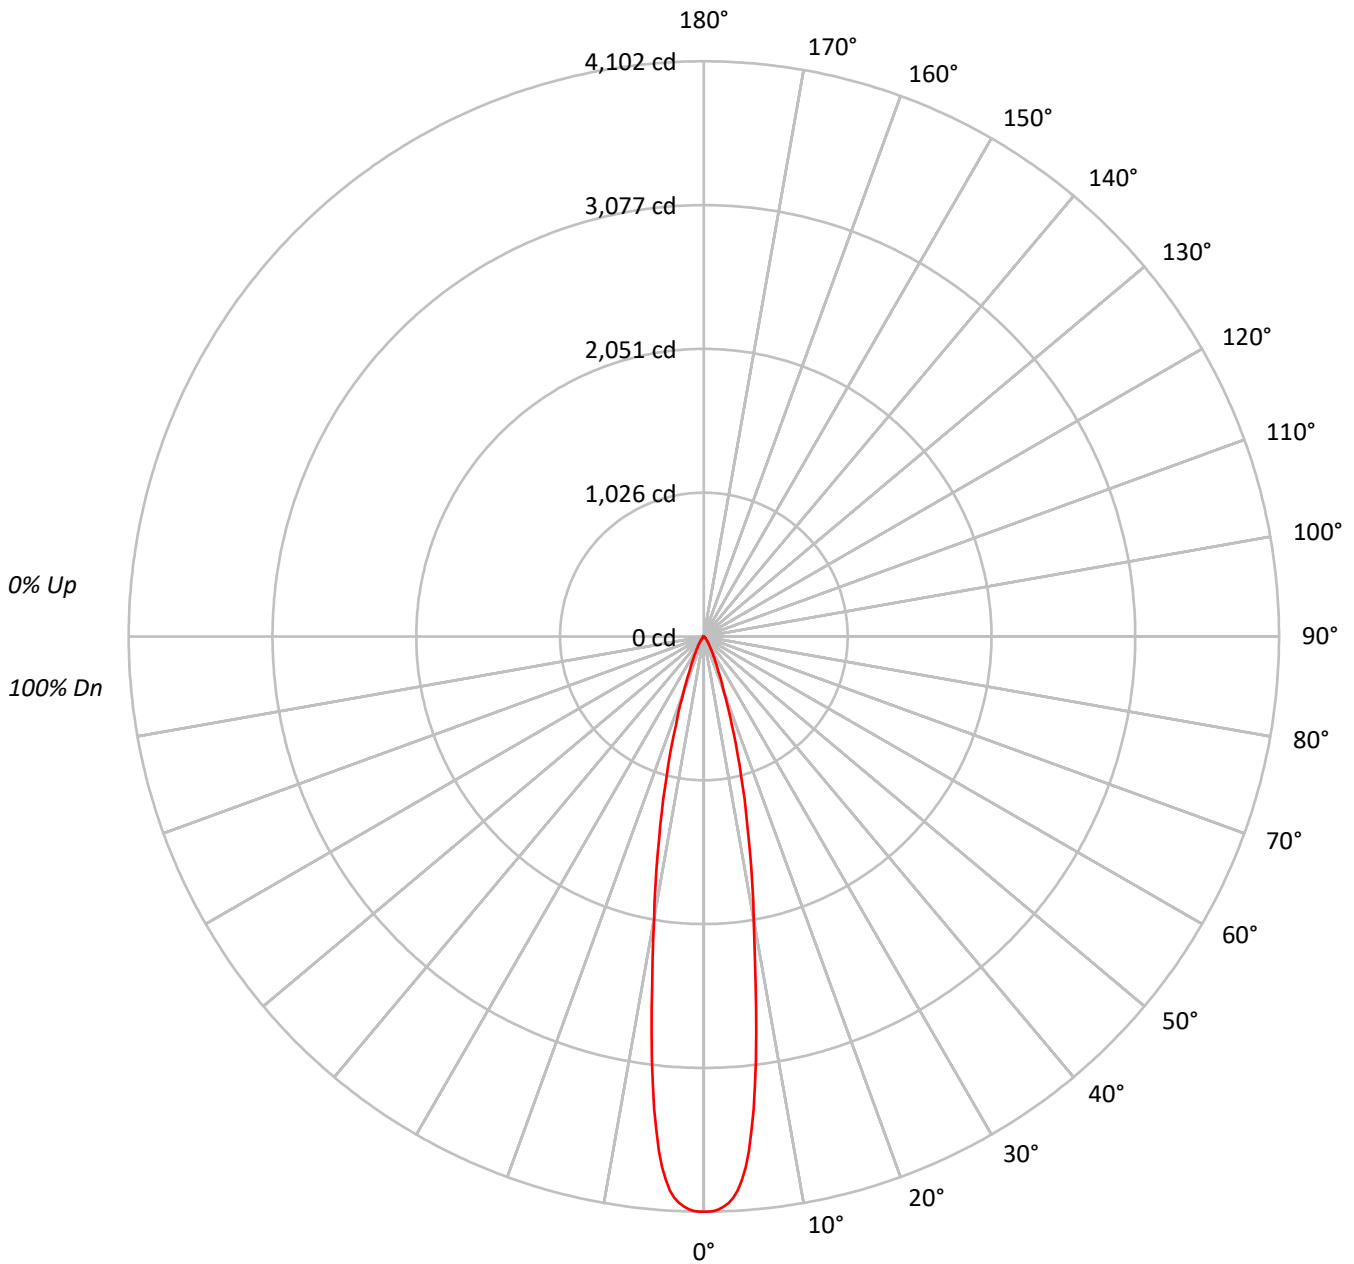



TEST NUMBER: P777322

CATALOG NUMBER: LERS4D05D010-EC4DR200210IC9027-4LBS1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	97	97																
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	94	94	94																
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	91	91	91																
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	88	88	88																
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	85	85	85																
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	83	83	83																
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	81	81	81																
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	79	79	79																
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	77	77	77																
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	75	75	75																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	448209
5°	404372
10°	226952
15°	115366
20°	48846
25°	22544
30°	11935
35°	6429
40°	3437
45°	2040
50°	1173
55°	629
60°	393
65°	284
70°	128
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2040 cd/sqm



TEST NUMBER: P777322

CATALOG NUMBER: LERS4D05D010-EC4DR200210IC9027-4LBS1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	292.1	40.5
10°-20°	287.6	39.9
20°-30°	93.9	13.0
30°-40°	32.0	4.4
40°-50°	10.7	1.5
50°-60°	3.2	0.5
60°-70°	1.1	0.2
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	673.6	93.5
0°-40°	705.6	97.9
0°-60°	719.6	99.8
0°-90°	720.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	720.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4102	
5°	3687	292
15°	1020	288
25°	187	94
35°	48	32
45°	13	11
55°	3	3
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P777322

CATALOG NUMBER: LERS4D05D010-EC4DR200210IC9027-4LBS1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	4102.2
0.5°	4102.2
1°	4097.1
1.5°	4086.9
2°	4068.3
2.5°	4043.4
3°	4008.3
3.5°	3959.4
4°	3886.7
4.5°	3798.3
5°	3686.9
5.5°	3540.4
6°	3390.3
6.5°	3218.2
7°	3049.8
7.5°	2852.6
8°	2676.5
8.5°	2499.3
9°	2335.7
9.5°	2185.5
10°	2045.6
12.5°	1468.8
15°	1019.9
17.5°	666.3
20°	420.1
22.5°	272.1
25°	187.0
27.5°	131.5
30°	94.6
32.5°	67.9
35°	48.2
37.5°	33.6
40°	24.1
42.5°	17.5
45°	13.2
47.5°	10.2
50°	6.9
52.5°	4.4
55°	3.3
57.5°	2.6
60°	1.8
62.5°	1.5
65°	1.1



TEST NUMBER: P777322

CATALOG NUMBER: LERS4D05D010-EC4DR200210IC9027-4LBS1LI

CANDELA DISTRIBUTION (continued):

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



67.5°		0.7
70°		0.4

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)