

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211800

Luminaire Tested: **LE\_4B20D010 EC4B10209050 4LBN1LI**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P211800  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LE\_4B20D010 EC4B10209050 4LBN1LI  
Description: PORTFOLIO 4 INCH CYLINDER  
NARROW DISTRIBUTION WITH SPECULAR CLEAR TRIM  
WATTAGE D010TR-21.86W DE010-20.46W D5LT-21.24W DMX-20.89W DL2-22.5W  
DL3-21.8 6W DLE-22.46W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1506.9 lumens  
Efficiency: N/A  
Efficacy: 72.4 lumens/watt  
Spacing Criteria (0/90/45): 0.48 / 0.48 / 0.54  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct

Input Watts (W): 20.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P211800  
CATALOG NUMBER: LE\_4B20D010 EC4B10209050 4LBN1LI

### Luminous Intensity Polar Plot

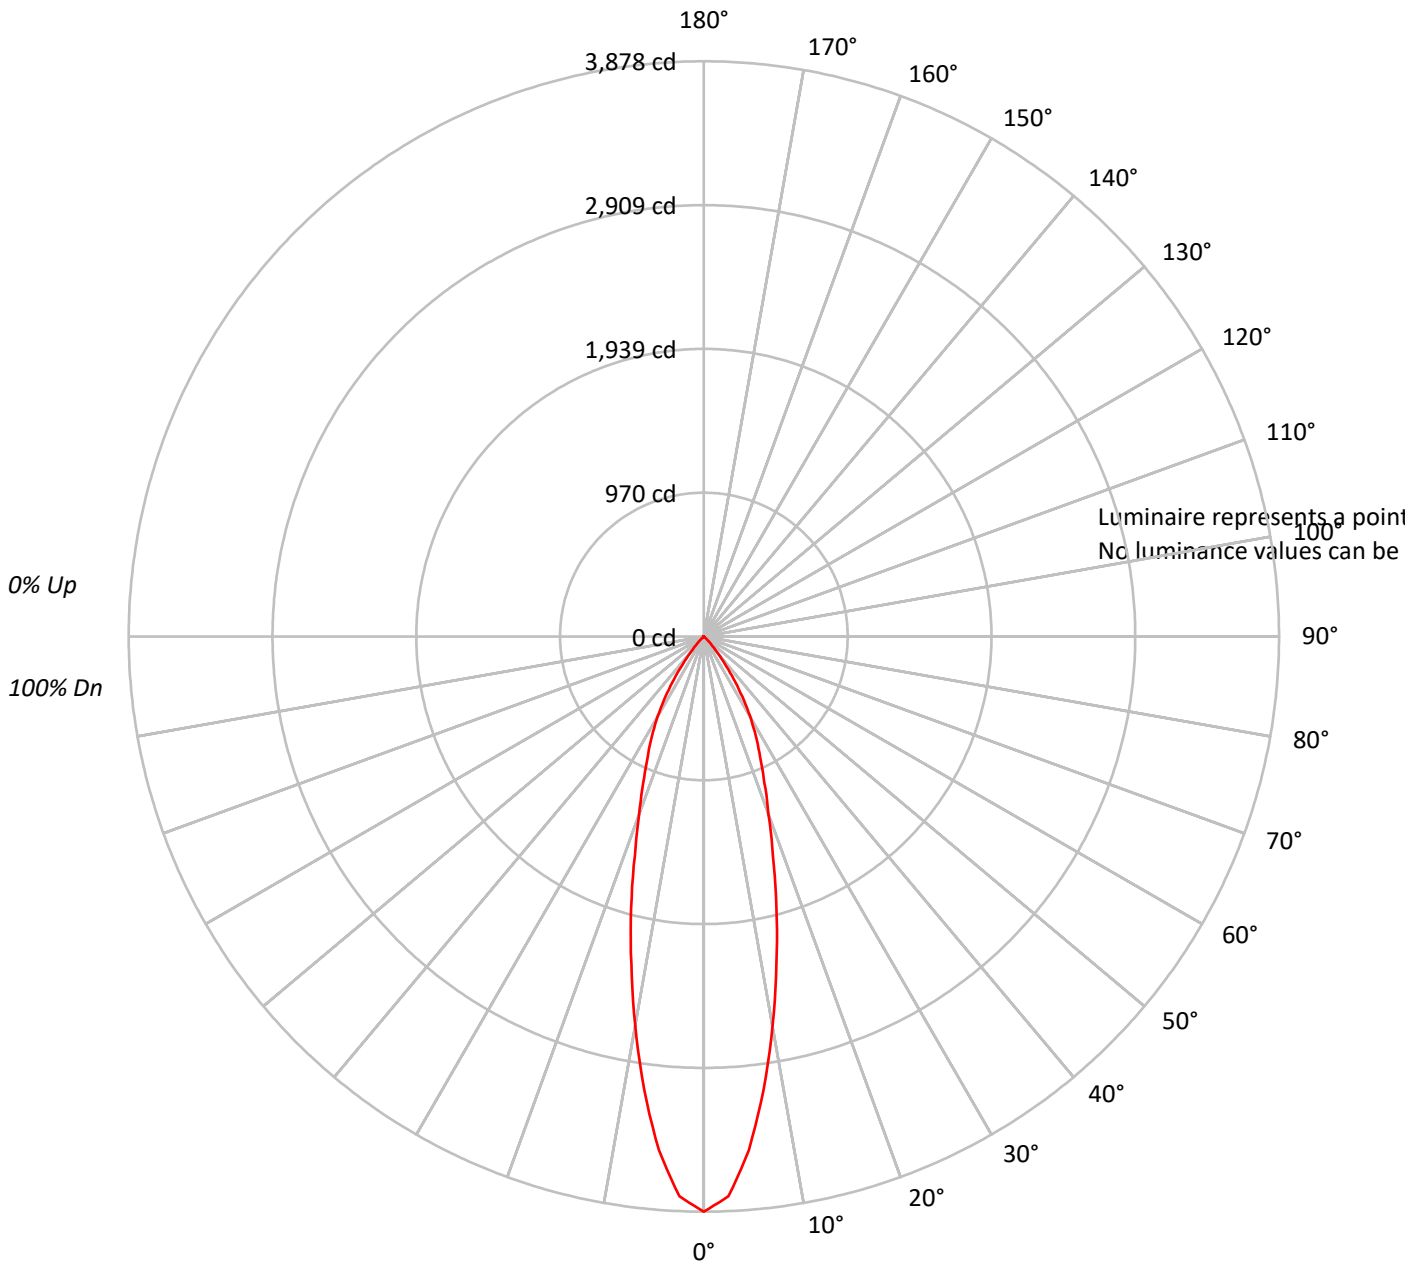



TEST NUMBER: P211800

CATALOG NUMBER: LE\_4B20D010 EC4B10209050 4LBN1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	92	90	90	90	90
3	105	99	95	92	103	98	94	91	95	92	89	93	90	88	91	89	87	85	85	85	85
4	101	94	89	86	99	93	88	85	91	87	84	89	86	83	87	84	82	81	81	81	81
5	96	89	84	80	95	88	84	80	87	82	79	85	81	79	83	80	78	77	77	77	77
6	92	85	80	76	91	84	79	76	83	78	75	81	78	75	80	77	74	73	73	73	73
7	89	81	76	72	88	80	75	72	79	75	71	78	74	71	77	73	71	69	69	69	69
8	85	77	72	68	84	77	72	68	76	71	68	75	71	68	74	70	67	66	66	66	66
9	82	74	69	65	81	73	68	65	72	68	65	72	68	65	71	67	64	63	63	63	63
10	79	71	66	62	78	70	65	62	69	65	62	69	65	62	68	64	62	61	61	61	61

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P211800

CATALOG NUMBER: LE\_4B20D010 EC4B10209050 4LBN1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	305.6	20.3
10°-20°	523.2	34.7
20°-30°	415.8	27.6
30°-40°	220.1	14.6
40°-50°	37.9	2.5
50°-60°	2.8	0.2
60°-70°	1.4	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1244.7	82.6
0°-40°	1464.8	97.2
0°-60°	1505.5	99.9
0°-90°	1506.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1506.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3878	
5°	3477	306
15°	1892	523
25°	896	416
35°	348	220
45°	39	38
55°	2	3
65°	2	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P211800

CATALOG NUMBER: LE\_4B20D010 EC4B10209050 4LBN1LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3878.2
2.5°	3778.4
5°	3476.6
7.5°	3082.1
10°	2664.4
12.5°	2260.5
15°	1891.5
17.5°	1548.0
20°	1274.1
22.5°	1065.2
25°	895.9
27.5°	758.9
30°	622.0
32.5°	482.8
35°	348.1
37.5°	229.8
40°	136.9
42.5°	78.9
45°	39.4
47.5°	13.9
50°	4.6
52.5°	4.6
55°	2.3
57.5°	2.3
60°	2.3
62.5°	2.3
65°	2.3
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)