

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211034

Luminaire Tested: **LSR4B10D010BZ EC4B10209050 4LBCSMB1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P211034  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR4B10D010BZ EC4B10209050 4LBCSMB1  
Description: PORTFOLIO 4 INCH CYLINDER  
SHALLOW DISTRIBUTION WITH CAST MATTE METALLIC SILVER TRIM  
WATTAGE D010TR-10.05W DE010-10.58W D5LT-10.2W DMX-10.6W DL2-11.8W  
DL3-11.1W DLE-11.39W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 914.1 lumens  
Efficiency: N/A  
Efficacy: 92.3 lumens/watt  
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 9.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P211034

CATALOG NUMBER: LSR4B10D010BZ EC4B10209050 4LBCSMB1

### Luminous Intensity Polar Plot

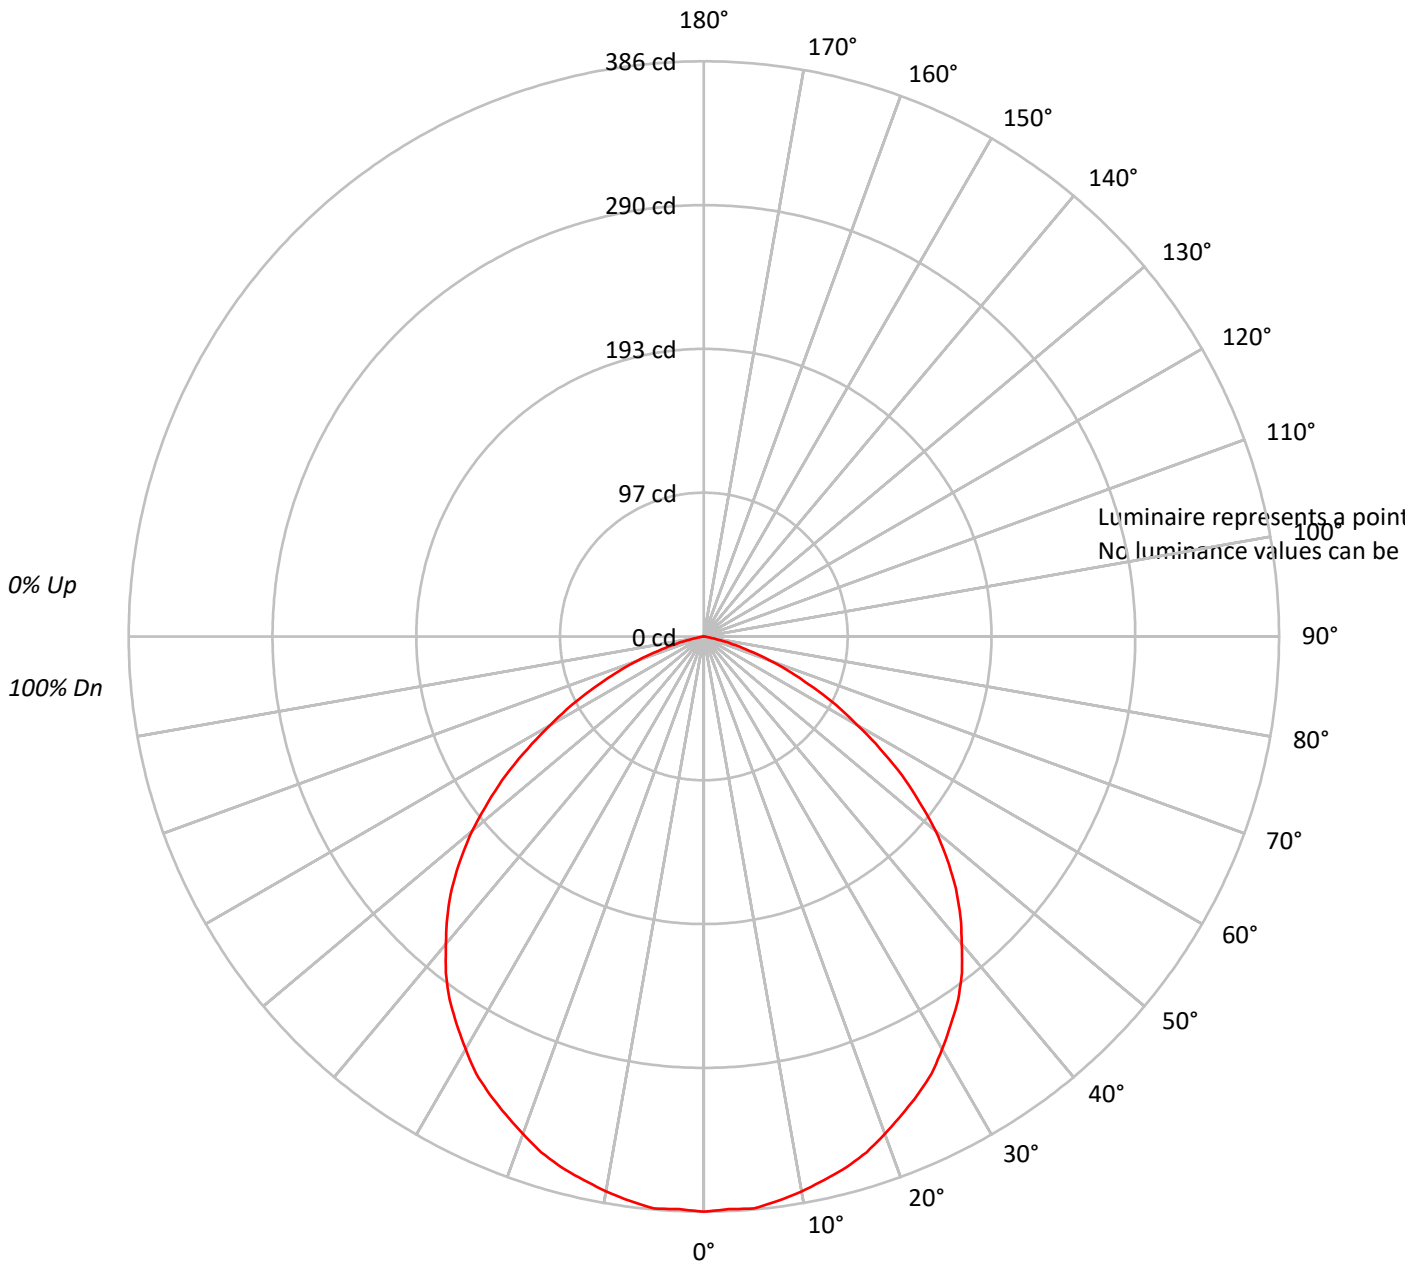



TEST NUMBER: P211034

CATALOG NUMBER: LSR4B10D010BZ EC4B10209050 4LBCSMB1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	111	107	103	100	108	104	101	98	100	98	95	96	94	92	93	91	90	88	88	88	88
2	102	95	89	84	99	93	87	83	89	85	81	86	82	79	83	80	77	75	75	75	75
3	93	84	77	71	91	83	76	70	80	74	69	77	72	68	74	70	67	65	65	65	65
4	86	75	67	61	84	74	66	61	71	65	60	69	63	59	67	62	58	56	56	56	56
5	79	67	59	53	77	66	59	53	64	57	52	62	56	52	61	55	51	49	49	49	49
6	74	61	53	47	72	60	52	46	58	51	46	57	50	46	55	50	45	43	43	43	43
7	68	55	47	41	67	55	47	41	53	46	41	52	45	41	50	45	40	39	39	39	39
8	64	51	43	37	62	50	42	37	49	42	37	48	41	37	46	41	36	35	35	35	35
9	60	47	39	33	58	46	39	33	45	38	33	44	38	33	43	37	33	31	31	31	31
10	56	43	35	30	55	43	35	30	42	35	30	41	34	30	40	34	30	28	28	28	28

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P211034

CATALOG NUMBER: LSR4B10D010BZ EC4B10209050 4LBCSMB1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	36.5	4.0
10°-20°	104.0	11.4
20°-30°	156.3	17.1
30°-40°	185.5	20.3
40°-50°	183.6	20.1
50°-60°	144.2	15.8
60°-70°	80.9	8.8
70°-80°	22.7	2.5
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	296.8	32.5
0°-40°	482.4	52.8
0°-60°	810.1	88.6
0°-90°	914.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	914.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	386	
5°	385	37
15°	369	104
25°	339	156
35°	298	186
45°	239	184
55°	162	144
65°	81	81
75°	20	23
85°	0	0
90°	0	



TEST NUMBER: P211034

CATALOG NUMBER: LSR4B10D010BZ EC4B10209050 4LBCSMB1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	386.0
2.5°	384.7
5°	385.3
7.5°	382.0
10°	378.1
12.5°	373.5
15°	368.9
17.5°	363.0
20°	355.2
22.5°	347.3
25°	339.4
27.5°	330.9
30°	319.8
32.5°	308.6
35°	297.5
37.5°	284.4
40°	269.3
42.5°	254.9
45°	239.2
47.5°	221.5
50°	203.1
52.5°	182.2
55°	162.5
57.5°	140.2
60°	119.3
62.5°	100.3
65°	80.6
67.5°	63.6
70°	47.2
72.5°	32.1
75°	19.7
77.5°	9.8
80°	2.6
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)