

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P211850

Luminaire Tested: **LSR4B30D010BZ EC4B30508027 4LBMGPH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P211850  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LSR4B30D010BZ EC4B30508027 4LBMGPH1  
Description: PORTFOLIO 4 INCH CYLINDER  
MEDIUM DISTRIBUTION WITH GRAPHITE HAZE TRIM  
WATTAGE D010TR-27.4W DE010-27.95W D5LT-27.65W DMX-27.73W DL2-29.56W  
DL3-29.67W DLE-29.73W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1507.1 lumens  
Efficiency: N/A  
Efficacy: 53.8 lumens/watt  
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.92  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 28  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P211850

CATALOG NUMBER: LSR4B30D010BZ EC4B30508027 4LBMGPH1

### Luminous Intensity Polar Plot

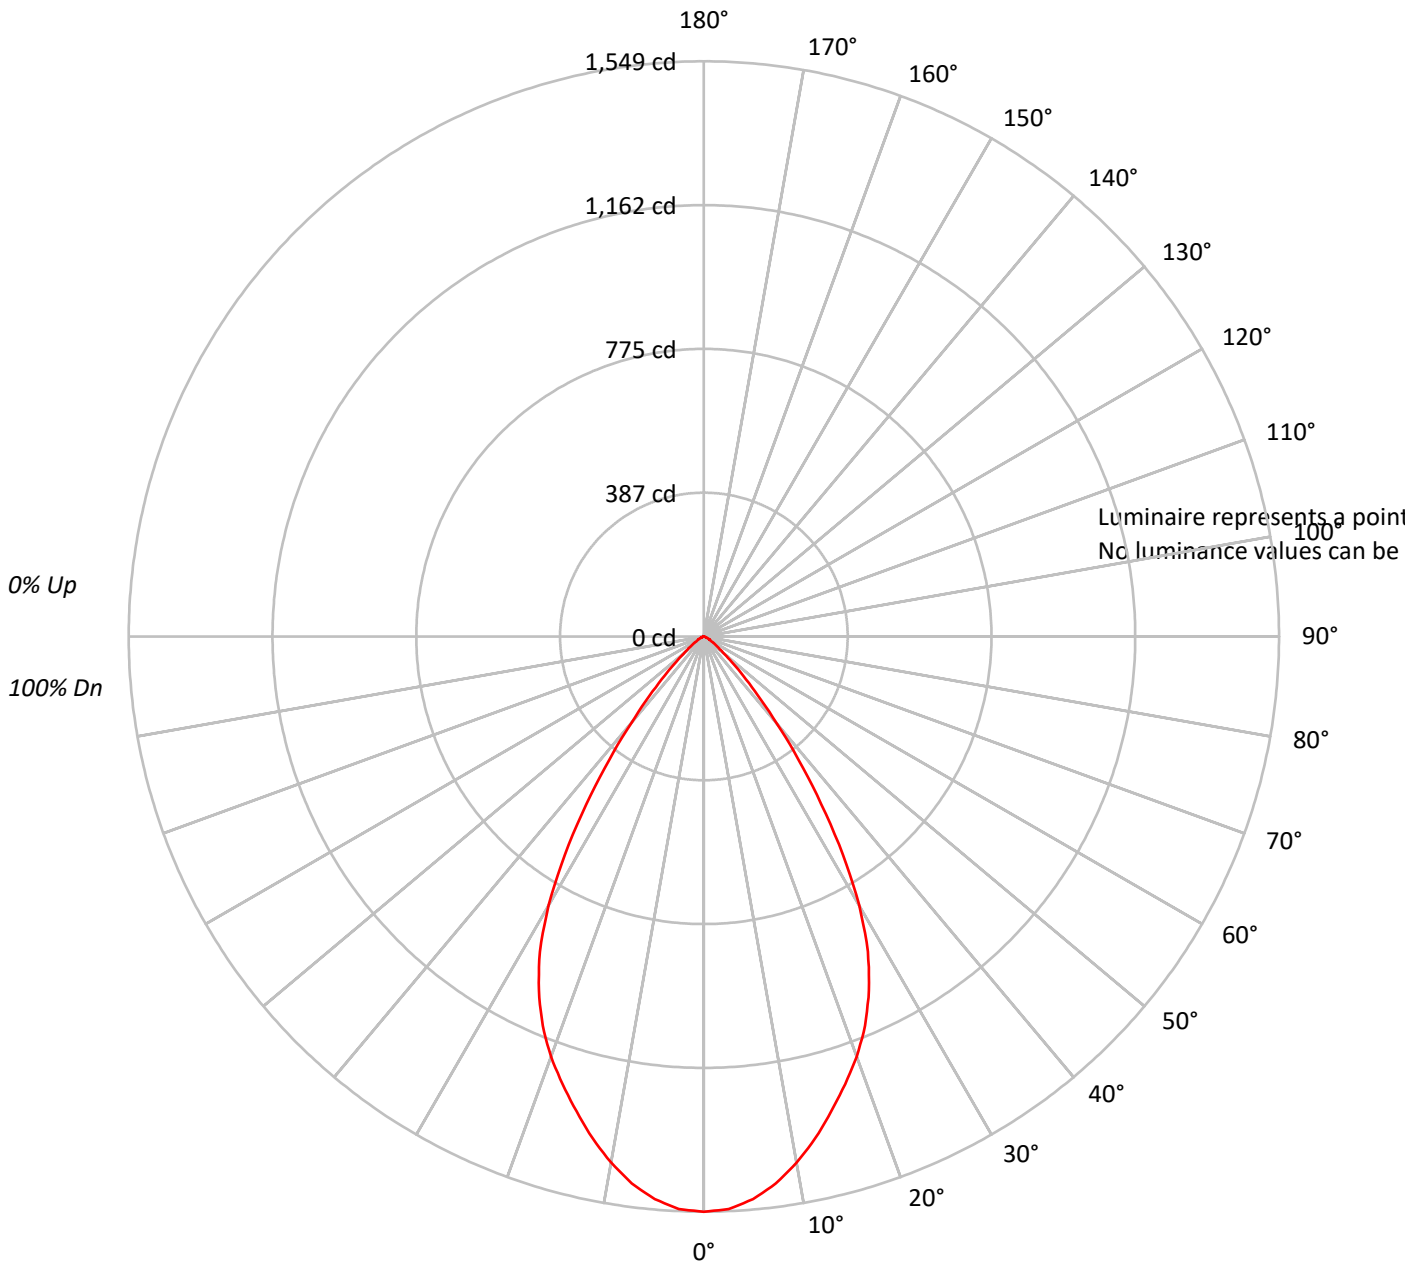



TEST NUMBER: P211850

CATALOG NUMBER: LSR4B30D010BZ EC4B30508027 4LBMGPH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	96	95	93																			
2	107	102	98	94	105	100	97	93	97	94	91	94	92	89	91	89	88	86																			
3	102	95	90	85	100	93	89	85	91	87	83	88	85	82	86	83	81	79																			
4	96	88	82	78	94	87	82	78	85	80	77	83	79	76	81	78	75	73																			
5	91	82	76	72	89	81	76	71	79	74	71	78	73	70	76	72	69	68																			
6	86	77	71	66	85	76	70	66	74	69	65	73	68	65	72	68	64	63																			
7	82	72	66	61	80	71	65	61	70	65	61	69	64	60	68	63	60	59																			
8	77	67	61	57	76	67	61	57	66	60	57	65	60	56	64	59	56	55																			
9	73	63	57	53	72	63	57	53	62	57	53	61	56	53	60	56	52	51																			
10	70	60	54	50	69	59	54	50	59	53	50	58	53	49	57	52	49	48																			

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P211850

CATALOG NUMBER: LSR4B30D010BZ EC4B30508027 4LBMGPH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	142.6	9.5
10°-20°	371.8	24.7
20°-30°	476.9	31.6
30°-40°	344.7	22.9
40°-50°	123.6	8.2
50°-60°	33.3	2.2
60°-70°	10.9	0.7
70°-80°	3.4	0.2
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	991.3	65.8
0°-40°	1335.9	88.6
0°-60°	1492.9	99.1
0°-90°	1507.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1507.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1549	
5°	1521	143
15°	1324	372
25°	1052	477
35°	551	345
45°	149	124
55°	35	33
65°	10	11
75°	3	3
85°	0	0
90°	0	



TEST NUMBER: P211850

CATALOG NUMBER: LSR4B30D010BZ EC4B30508027 4LBMGPH1

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1549.4
2.5°	1543.1
5°	1520.9
7.5°	1486.1
10°	1438.5
12.5°	1384.7
15°	1324.5
17.5°	1264.3
20°	1204.1
22.5°	1134.3
25°	1052.0
27.5°	956.9
30°	836.5
32.5°	697.1
35°	551.3
37.5°	418.3
40°	304.2
42.5°	215.5
45°	148.9
47.5°	101.4
50°	66.5
52.5°	47.5
55°	34.9
57.5°	25.3
60°	19.0
62.5°	15.8
65°	9.5
67.5°	6.3
70°	6.3
72.5°	3.2
75°	3.2
77.5°	3.2
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)