

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P843240

Luminaire Tested: **LD4C08DE010B2750 EU4C08B35 4LBCSMB**

Issue Date: 5/7/2024



Test Information

Test Method: LM-79-08
Report Number: P843240
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P206301)
Test Lab: INNOVATION CENTER
Issue Date: 5/7/2024
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD4C08DE010B2750 EU4C08B35 4LBCSMB
Description: 4in Downlight with BioUp LEDs
Light Source: -
Ballast/Driver:

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 569.0 lumens
Efficiency: N/A
Efficacy: 59.3 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 9.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P843240

CATALOG NUMBER: LD4C08DE010B2750 EU4C08B35 4LBCSMB

Luminous Intensity Polar Plot

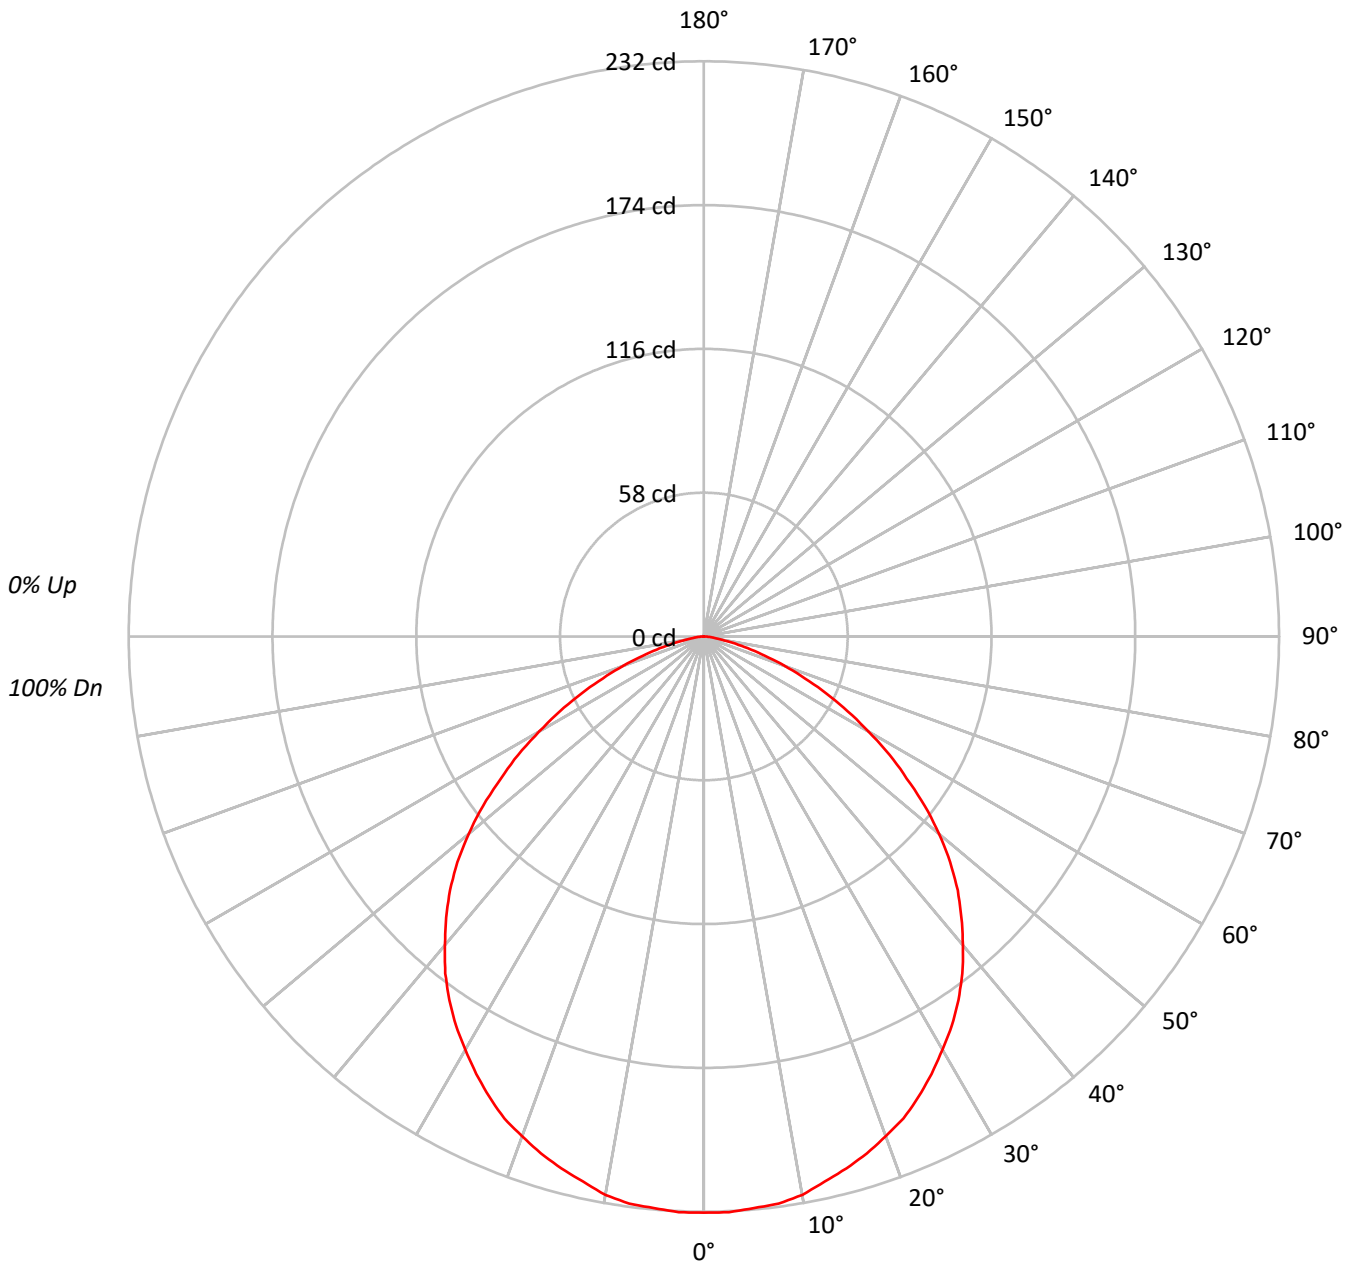



TEST NUMBER: P843240

CATALOG NUMBER: LD4C08DE010B2750 EU4C08B35 4LBCSMB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	110	106	102	99	108	104	100	97	100	97	94	96	93	91	92	90	89	87				87
2	101	94	87	82	99	92	86	81	88	84	79	85	81	78	82	79	76	74				74
3	93	83	75	70	90	81	74	69	79	73	68	76	71	67	73	69	65	63				63
4	85	74	66	60	83	73	65	59	70	64	58	68	62	58	66	61	57	55				55
5	79	66	58	52	77	65	57	51	63	56	51	61	55	50	60	54	50	48				48
6	73	60	52	45	71	59	51	45	57	50	45	56	49	44	54	49	44	42				42
7	68	55	46	40	66	54	46	40	52	45	40	51	44	40	50	44	39	37				37
8	63	50	42	36	61	49	41	36	48	41	36	47	40	36	46	40	35	33				33
9	59	46	38	33	57	45	38	32	44	37	32	43	37	32	42	36	32	30				30
10	55	42	35	30	54	42	34	30	41	34	29	40	34	29	39	33	29	27				27

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	28551
5°	28537
10°	28530
15°	28248
20°	28043
25°	27775
30°	27294
35°	26846
40°	26061
45°	25158
50°	23661
55°	21397
60°	18821
65°	15843
70°	12392
75°	8686
80°	4882
85°	3383



TEST NUMBER: P843240

CATALOG NUMBER: LD4C08DE010B2750 EU4C08B35 4LBCSMB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	22.0	3.9
10°-20°	62.7	11.0
20°-30°	94.3	16.6
30°-40°	111.7	19.6
40°-50°	111.2	19.5
50°-60°	89.6	15.8
60°-70°	54.2	9.5
70°-80°	20.1	3.5
80°-90°	3.0	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	179.0	31.5
0°-40°	290.8	51.1
0°-60°	491.6	86.4
0°-90°	569.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	569.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	232	
5°	231	22
15°	222	63
25°	205	94
35°	179	112
45°	145	111
55°	100	90
65°	54	54
75°	18	20
85°	2	3
90°	0	



TEST NUMBER: P843240

CATALOG NUMBER: LD4C08DE010B2750 EU4C08B35 4LBCSMB

CANDELA DISTRIBUTION (FULL):

	0°
0°	232.4
2.5°	232.4
5°	231.4
7.5°	230.7
10°	228.7
12.5°	225.2
15°	222.1
17.5°	218.6
20°	214.5
22.5°	210.4
25°	204.9
27.5°	198.9
30°	192.4
32.5°	186.1
35°	179.0
37.5°	171.3
40°	162.5
42.5°	153.8
45°	144.8
47.5°	134.8
50°	123.8
52.5°	112.4
55°	99.9
57.5°	88.9
60°	76.6
62.5°	65.5
65°	54.5
67.5°	44.1
70°	34.5
72.5°	25.8
75°	18.3
77.5°	11.7
80°	6.9
82.5°	4.1
85°	2.4
87.5°	1.1
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)