

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P760142

Luminaire Tested: LD6D10D010-EU6DR250210IC9040-6LBS1B

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P760142  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-4)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D10D010-EU6DR250210IC9040-6LBS1B  
Description: 6 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 25° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 992.9 lumens  
Efficiency: N/A  
Efficacy: 84.9 lumens/watt  
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.45  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 11.7  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P760142  
CATALOG NUMBER: LD6D10D010-EU6DR250210IC9040-6LBS1B

### Luminous Intensity Polar Plot

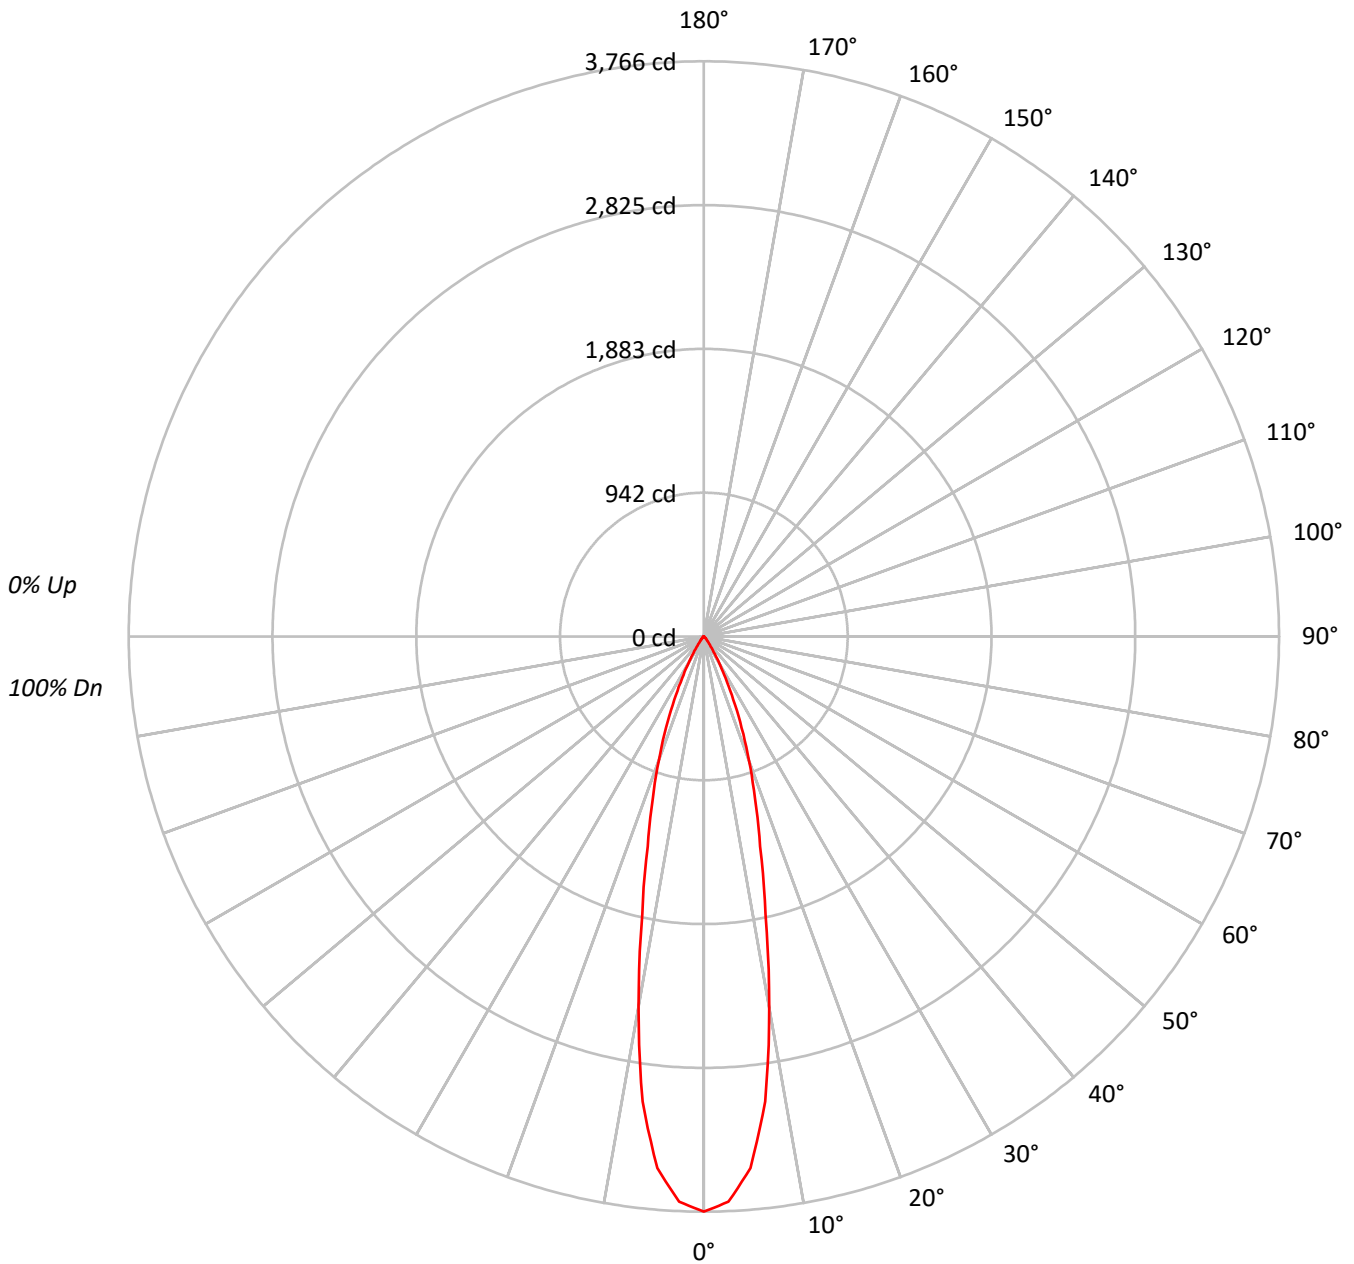



TEST NUMBER: P760142

CATALOG NUMBER: LD6D10D010-EU6DR250210IC9040-6LBS1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20																	
RC	80									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0															
RCR																																													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																											
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																											
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																											
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																											
4	103	97	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																											
5	100	93	89	86	98	93	89	86	91	87	85	89	86	84	88	85	83	82																											
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																											
7	93	87	82	79	92	86	82	79	85	81	78	84	80	78	83	80	78	77																											
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																											
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																											
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																											

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	411421
5°	383193
10°	273338
15°	160985
20°	100169
25°	54973
30°	25144
35°	9524
40°	4322
45°	2596
50°	1071
55°	705
60°	481
65°	336
70°	64
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2596 cd/sqm



TEST NUMBER: P760142

CATALOG NUMBER: LD6D10D010-EU6DR250210IC9040-6LBS1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	300.3	30.2
10°-20°	406.7	41.0
20°-30°	215.2	21.7
30°-40°	53.1	5.4
40°-50°	13.0	1.3
50°-60°	3.4	0.3
60°-70°	1.2	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	922.2	92.9
0°-40°	975.3	98.2
0°-60°	991.7	99.9
0°-90°	992.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	992.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3766	
5°	3494	300
15°	1423	407
25°	456	215
35°	71	53
45°	17	13
55°	4	3
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P760142  
CATALOG NUMBER: LD6D10D010-EU6DR250210IC9040-6LBS1B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3765.5
2.5°	3703.7
5°	3493.8
7.5°	3072.2
10°	2463.7
12.5°	1862.4
15°	1423.2
17.5°	1109.2
20°	861.5
22.5°	646.1
25°	456.0
27.5°	305.8
30°	199.3
32.5°	121.2
35°	71.4
37.5°	43.7
40°	30.3
42.5°	23.1
45°	16.8
47.5°	10.1
50°	6.3
52.5°	4.6
55°	3.7
57.5°	2.9
60°	2.2
62.5°	1.7
65°	1.3
67.5°	0.5
70°	0.2
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)