

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P762940

Luminaire Tested: LD6D25D010-EU6DR2015309024-6LBDP1B

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P762940  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D25D010-EU6DR2015309024-6LBDP1B  
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 20° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2247.2 lumens  
Efficiency: N/A  
Efficacy: 89.5 lumens/watt  
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 25.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P762940  
CATALOG NUMBER: LD6D25D010-EU6DR2015309024-6LBDP1B

### Luminous Intensity Polar Plot

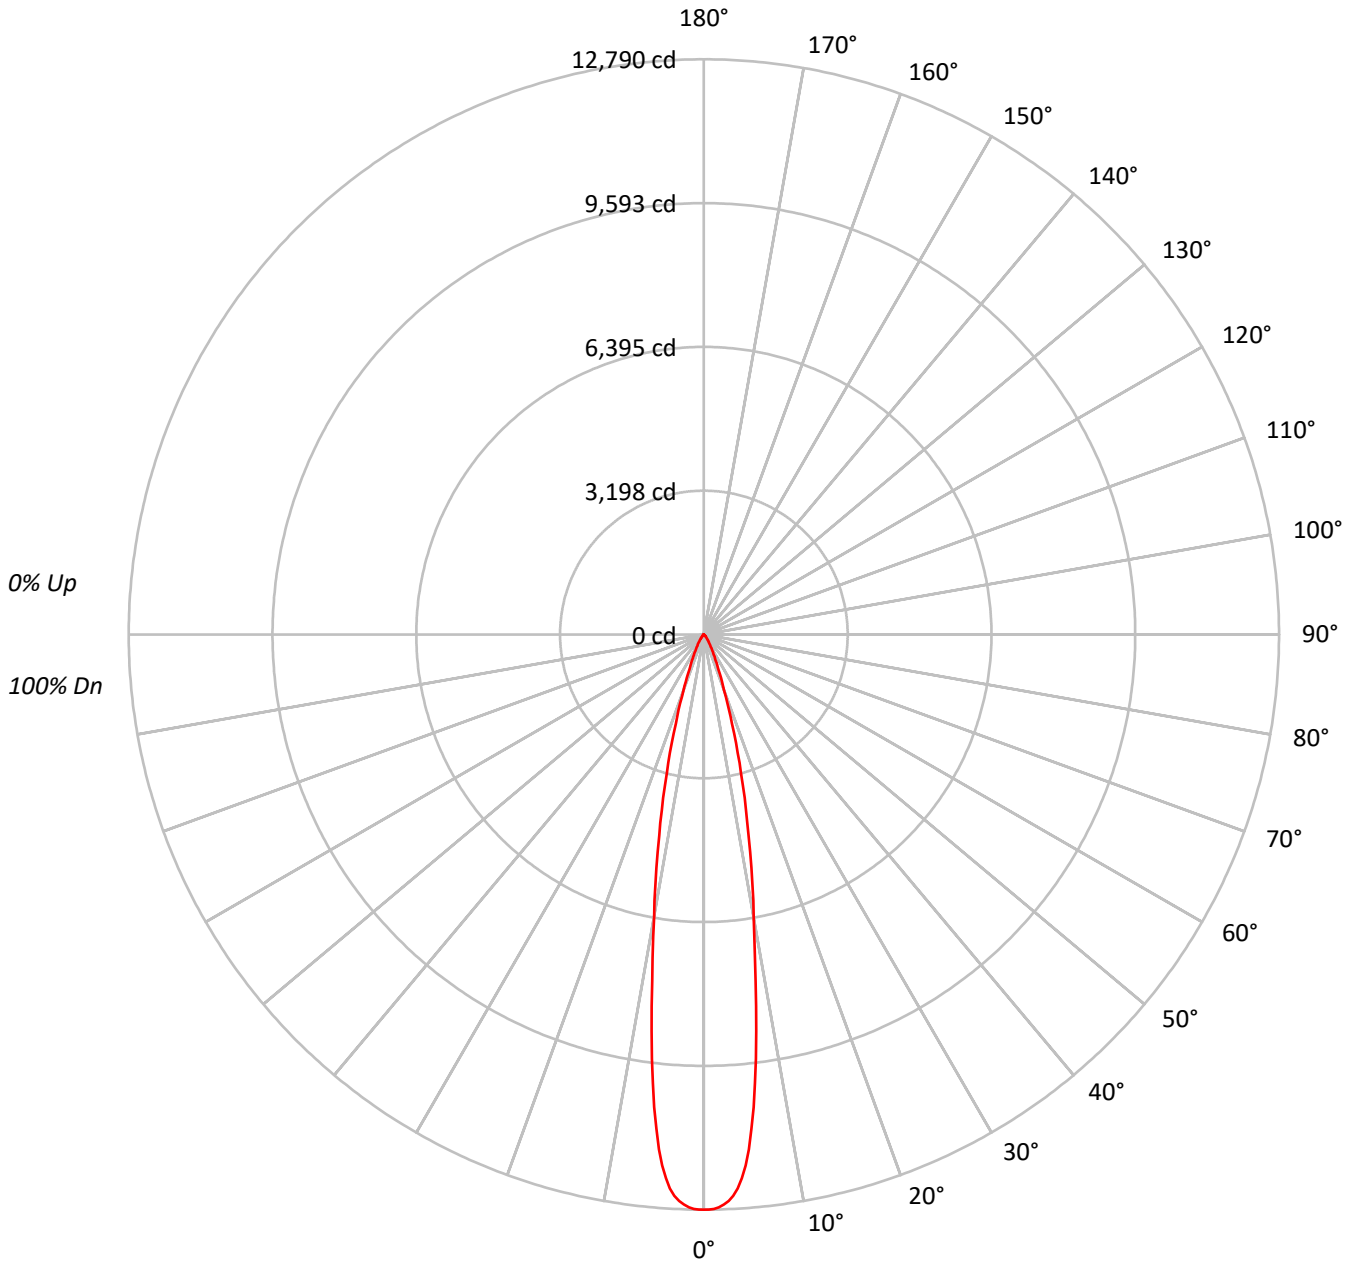



TEST NUMBER: P762940

CATALOG NUMBER: LD6D25D010-EU6DR2015309024-6LBDP1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	97	97
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	94	94	94
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	91	91	91
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	88	88	88
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	85	85	85
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	83	83	83
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	81	81	81
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	79	79	79
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	77	77	77
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	75	75	75

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1397456
5°	1260772
10°	707615
15°	359695
20°	152294
25°	70296
30°	37218
35°	20047
40°	10726
45°	6335
50°	3672
55°	1962
60°	1246
65°	879
70°	351
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 6335 cd/sqm



TEST NUMBER: P762940

CATALOG NUMBER: LD6D25D010-EU6DR2015309024-6LBDP1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	910.6	40.5
10°-20°	896.7	39.9
20°-30°	292.9	13.0
30°-40°	99.7	4.4
40°-50°	33.5	1.5
50°-60°	10.1	0.5
60°-70°	3.4	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2100.3	93.5
0°-40°	2200.0	97.9
0°-60°	2243.6	99.8
0°-90°	2247.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2247.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	12790	
5°	11495	911
15°	3180	897
25°	583	293
35°	150	100
45°	41	34
55°	10	10
65°	3	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P762940

CATALOG NUMBER: LD6D25D010-EU6DR2015309024-6LBDP1B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	12790.1
0.5°	12790.1
1°	12774.2
1.5°	12742.3
2°	12684.2
2.5°	12606.8
3°	12497.4
3.5°	12344.8
4°	12118.2
4.5°	11842.6
5°	11495.2
5.5°	11038.5
6°	10570.4
6.5°	10033.9
7°	9508.9
7.5°	8893.9
8°	8344.9
8.5°	7792.5
9°	7282.3
9.5°	6814.2
10°	6378.0
12.5°	4579.6
15°	3179.9
17.5°	2077.4
20°	1309.8
22.5°	848.5
25°	583.1
27.5°	410.0
30°	295.0
32.5°	211.8
35°	150.3
37.5°	104.8
40°	75.2
42.5°	54.7
45°	41.0
47.5°	31.9
50°	21.6
52.5°	13.7
55°	10.3
57.5°	8.0
60°	5.7
62.5°	4.6
65°	3.4



TEST NUMBER: P762940  
CATALOG NUMBER: LD6D25D010-EU6DR2015309024-6LBDP1B

**CANDELA DISTRIBUTION (continued):**

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



67.5°		2.3
70°		1.1

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)