

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P758206

Luminaire Tested: LD6D05D010-EU6DR300210IC9050-6LBS1H

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P758206  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D05D010-EU6DR300210IC9050-6LBS1H  
Description: 6 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 30° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 728.2 lumens  
Efficiency: N/A  
Efficacy: 97.1 lumens/watt  
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49  
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')  
CIE Type: Direct

Input Watts (W): 7.5  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P758206  
CATALOG NUMBER: LD6D05D010-EU6DR300210IC9050-6LBS1H

### Luminous Intensity Polar Plot

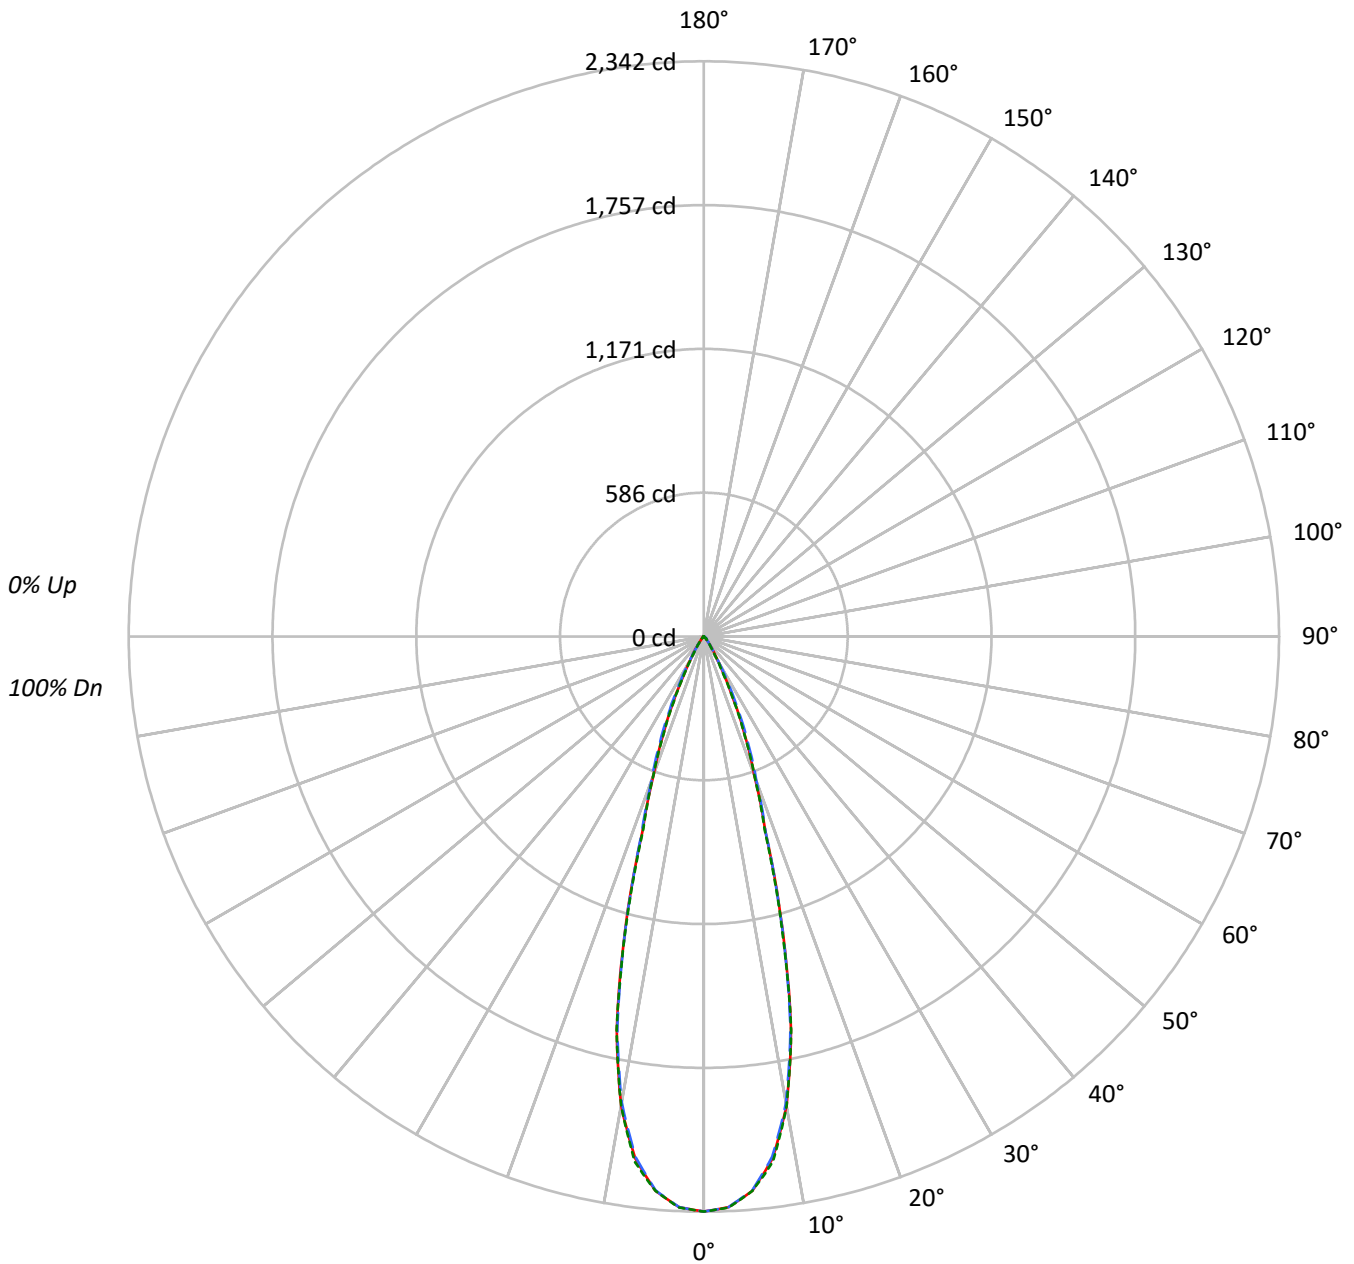



TEST NUMBER: P758206

CATALOG NUMBER: LD6D05D010-EU6DR300210IC9050-6LBS1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	179234	179234	179234
5°	174087	173887	174095
10°	150793	149728	150754
15°	98381	97850	97359
20°	48922	50755	48857
25°	24644	27786	24138
30°	9864	10748	8600
35°	4579	4382	3672
40°	1978	2188	1859
45°	1396	1732	1407
50°	476	1262	500
55°	280	520	294
60°	199	230	199
65°	127	127	127
70°	67	45	67
75°	0	30	0
80°	0	0	0
85°	0	0	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 22.5°  
 Vertical Angle: 45°  
 Luminance: 1732 cd/sqm



TEST NUMBER: P758206

CATALOG NUMBER: LD6D05D010-EU6DR300210IC9050-6LBS1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	205.9	28.3
10°-20°	331.6	45.5
20°-30°	143.3	19.7
30°-40°	32.7	4.5
40°-50°	11.2	1.5
50°-60°	2.7	0.4
60°-70°	0.7	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	680.8	93.5
0°-40°	713.5	98.0
0°-60°	727.4	99.9
0°-90°	728.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	728.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2342	2342	2342	2342	2342	
5°	2266	2264	2263	2268	2266	206
15°	1242	1227	1235	1231	1229	332
25°	292	303	329	295	286	140
35°	49	50	47	47	39	33
45°	13	16	16	16	13	9
55°	2	2	4	2	2	2
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P758206

CATALOG NUMBER: LD6D05D010-EU6DR300210IC9050-6LBS1H

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2341.6	2341.6	2341.6	2341.6	2341.6
2.5°	2326.1	2324.5	2325.4	2326.6	2327.0
5°	2265.7	2263.6	2263.1	2267.8	2265.8
7.5°	2144.0	2140.9	2136.2	2146.8	2156.9
10°	1940.1	1936.6	1926.4	1931.4	1939.6
12.5°	1638.9	1627.8	1627.6	1643.7	1641.5
15°	1241.5	1226.6	1234.8	1230.8	1228.6
17.5°	834.9	829.1	840.2	836.9	822.5
20°	600.6	602.1	623.1	612.5	599.8
22.5°	438.3	443.6	468.6	441.3	431.4
25°	291.8	302.8	329.0	295.1	285.8
27.5°	179.4	184.5	211.1	177.2	172.1
30°	111.6	109.1	121.6	104.4	97.3
32.5°	73.2	70.0	74.0	66.5	60.7
35°	49.0	50.0	46.9	46.6	39.3
37.5°	30.6	35.2	31.1	33.1	25.3
40°	19.8	25.5	21.9	24.2	18.6
42.5°	16.2	19.7	18.0	19.2	16.6
45°	12.9	16.0	16.0	16.0	13.0
47.5°	7.1	10.7	13.7	10.9	7.6
50°	4.0	5.4	10.6	5.6	4.2
52.5°	2.8	3.1	7.2	3.2	2.9
55°	2.1	2.2	3.9	2.3	2.2
57.5°	1.6	1.7	2.1	1.7	1.6
60°	1.3	1.3	1.5	1.4	1.3
62.5°	0.9	0.9	1.0	0.9	0.9
65°	0.7	0.7	0.7	0.7	0.7
67.5°	0.3	0.5	0.5	0.5	0.5
70°	0.3	0.2	0.2	0.2	0.3
72.5°	0.2	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report







— 0°-180°    - - 45°-225°    - - - - 90°-270°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)