

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P768224

Luminaire Tested: LD6D55D010-EU6DR4555659040-6LBS1LI

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P768224
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D55D010-EU6DR4555659040-6LBS1LI
Description: 6 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 45° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7796.6 lumens
Efficiency: N/A
Efficacy: 134.0 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 58.2
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P768224
CATALOG NUMBER: LD6D55D010-EU6DR4555659040-6LBS1LI

Luminous Intensity Polar Plot

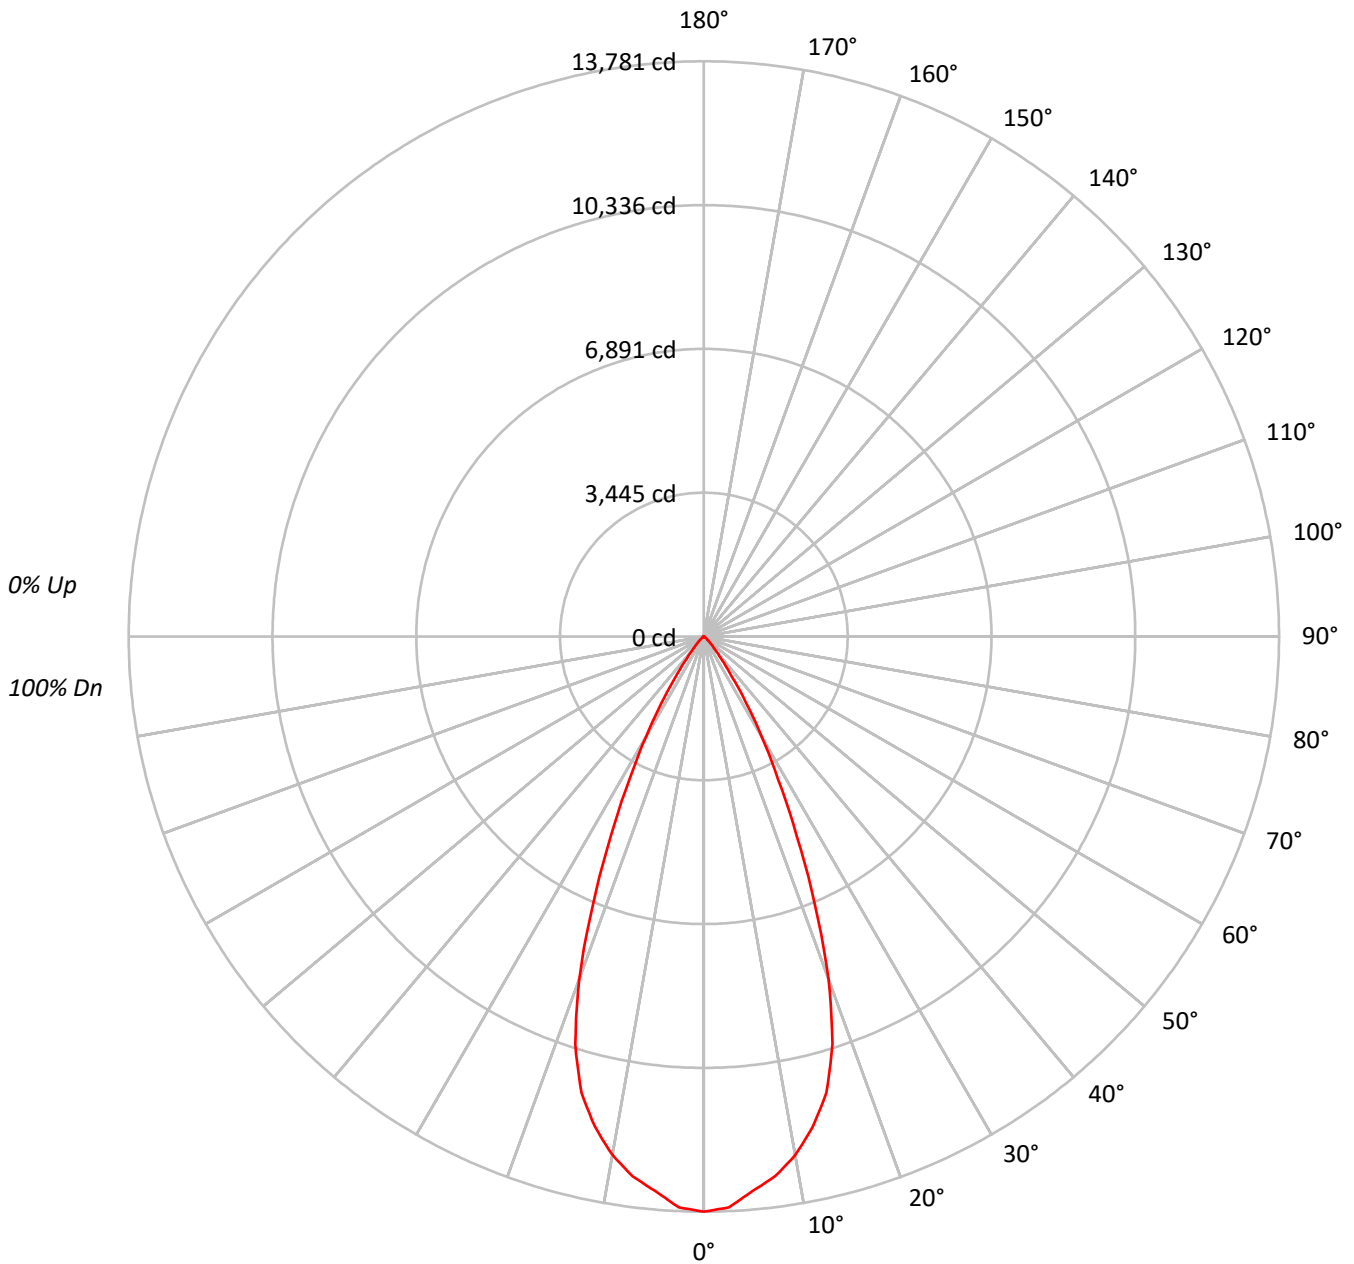



TEST NUMBER: P768224

CATALOG NUMBER: LD6D55D010-EU6DR4555659040-6LBS1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20																	
RC	80									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0															
RCR																																													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																											
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	98	98	97	95																											
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	91	90																											
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	89	87	85																											
4	100	94	89	85	99	93	88	85	91	87	84	89	86	83	87	84	82	81																											
5	96	89	84	80	95	88	83	80	86	82	79	85	81	79	83	80	78	77																											
6	92	85	80	76	91	84	79	76	83	78	75	81	77	75	80	77	74	73																											
7	89	81	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	69																											
8	85	77	72	68	84	76	71	68	75	71	68	74	70	67	73	70	67	66																											
9	82	73	68	65	81	73	68	65	72	68	65	71	67	64	71	67	64	63																											
10	79	70	65	62	78	70	65	62	69	65	62	68	64	61	68	64	61	60																											

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1505679
5°	1462810
10°	1399510
15°	1280847
20°	1016155
25°	634401
30°	349662
35°	157005
40°	61844
45°	29142
50°	13819
55°	7220
60°	3562
65°	853
70°	351
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 29142 cd/sqm



TEST NUMBER: P768224

CATALOG NUMBER: LD6D55D010-EU6DR4555659040-6LBS1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1253.2	16.1
10°-20°	3084.2	39.6
20°-30°	2442.4	31.3
30°-40°	813.3	10.4
40°-50°	161.4	2.1
50°-60°	36.6	0.5
60°-70°	5.3	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6779.7	87.0
0°-40°	7593.1	97.4
0°-60°	7791.1	99.9
0°-90°	7796.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7796.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	13781	
5°	13337	###
15°	11323	3084
25°	5262	2442
35°	1177	813
45°	189	161
55°	38	37
65°	3	5
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P768224

CATALOG NUMBER: LD6D55D010-EU6DR4555659040-6LBS1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	13780.6
2.5°	13690.6
5°	13337.3
7.5°	13045.7
10°	12614.3
12.5°	12039.9
15°	11323.4
17.5°	10246.0
20°	8739.4
22.5°	6944.5
25°	5262.3
27.5°	3853.2
30°	2771.5
32.5°	1884.9
35°	1177.1
37.5°	698.0
40°	433.6
42.5°	285.1
45°	188.6
47.5°	121.4
50°	81.3
52.5°	54.2
55°	37.9
57.5°	24.9
60°	16.3
62.5°	8.7
65°	3.3
67.5°	1.1
70°	1.1
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)