

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P770863

Luminaire Tested: LD6D70BD010-EU6DR6570959035-6LBS1LI

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P770863
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D70BD010-EU6DR6570959035-6LBS1LI
Description: 6 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7899.8 lumens
Efficiency: N/A
Efficacy: 118.6 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct


Input Watts (W): 66.6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P770863
CATALOG NUMBER: LD6D70BD010-EU6DR6570959035-6LBS1LI

Luminous Intensity Polar Plot

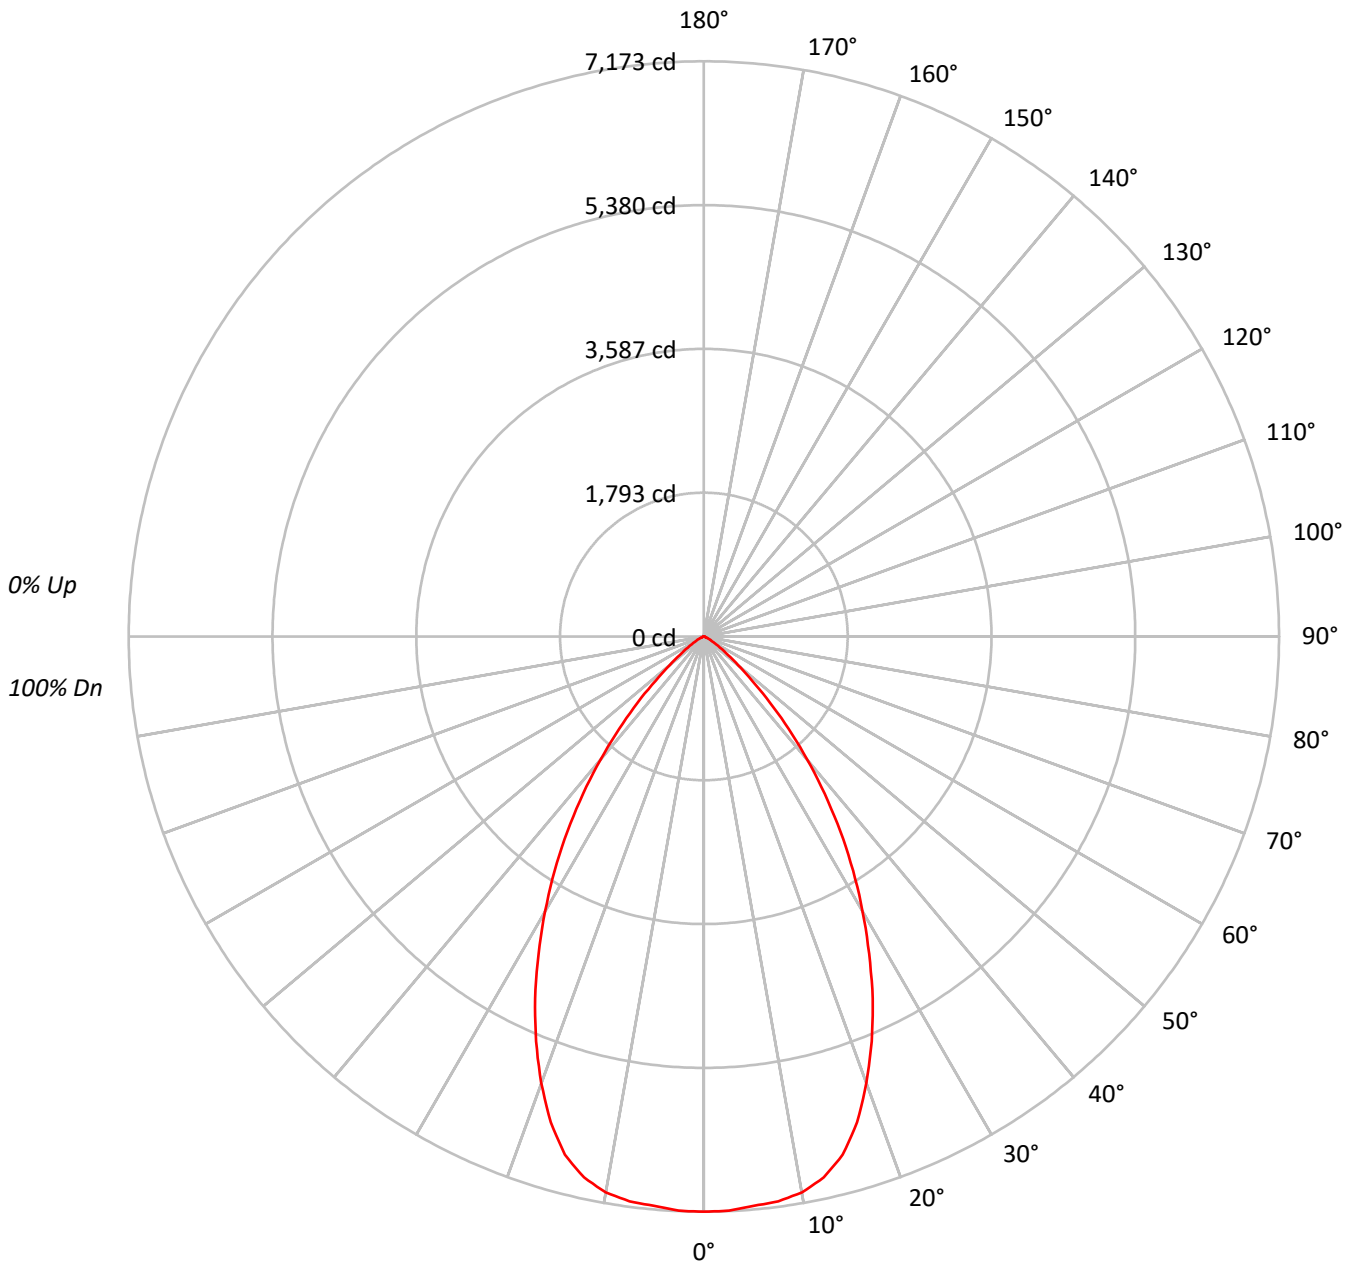



TEST NUMBER: P770863

CATALOG NUMBER: LD6D70BD010-EU6DR6570959035-6LBS1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93			93
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85			85
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			78
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72			72
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66			66
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61			61
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56			56
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52			52
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49			49
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46			46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	418913
5°	417858
10°	417500
15°	404626
20°	368363
25°	321009
30°	266984
35°	211548
40°	152688
45°	96463
50°	50282
55°	26729
60°	14040
65°	7725
70°	3244
75°	3565
80°	2489
85°	2144

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 96463 cd/sqm



TEST NUMBER: P770863

CATALOG NUMBER: LD6D70BD010-EU6DR6570959035-6LBS1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	678.3	8.6
10°-20°	1857.5	23.5
20°-30°	2270.5	28.7
30°-40°	1842.2	23.3
40°-50°	918.0	11.6
50°-60°	256.1	3.2
60°-70°	58.2	0.7
70°-80°	15.1	0.2
80°-90°	3.9	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4806.2	60.8
0°-40°	6648.4	84.2
0°-60°	7822.5	99.0
0°-90°	7899.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7899.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7173	
5°	7127	678
15°	6692	1857
25°	4981	2270
35°	2967	1842
45°	1168	918
55°	262	256
65°	56	58
75°	16	15
85°	3	4
90°	0	



TEST NUMBER: P770863

CATALOG NUMBER: LD6D70BD010-EU6DR6570959035-6LBS1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	7172.7
2.5°	7167.4
5°	7127.4
7.5°	7104.2
10°	7039.9
12.5°	6909.2
15°	6692.0
17.5°	6352.6
20°	5926.8
22.5°	5467.3
25°	4981.4
27.5°	4461.7
30°	3958.9
32.5°	3462.5
35°	2967.1
37.5°	2472.8
40°	2002.7
42.5°	1562.1
45°	1167.9
47.5°	813.7
50°	553.4
52.5°	381.6
55°	262.5
57.5°	177.1
60°	120.2
62.5°	83.3
65°	55.9
67.5°	28.5
70°	19.0
72.5°	17.9
75°	15.8
77.5°	10.5
80°	7.4
82.5°	5.3
85°	3.2
87.5°	2.1
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)