

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P759401

Luminaire Tested: LD6D08D010-EU6DR450210IC9027-6LBS1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P759401
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D08D010-EU6DR450210IC9027-6LBS1B
Description: 6 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 45° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 760.2 lumens
Efficiency: N/A
Efficacy: 85.4 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 8.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P759401
CATALOG NUMBER: LD6D08D010-EU6DR450210IC9027-6LBS1B

Luminous Intensity Polar Plot

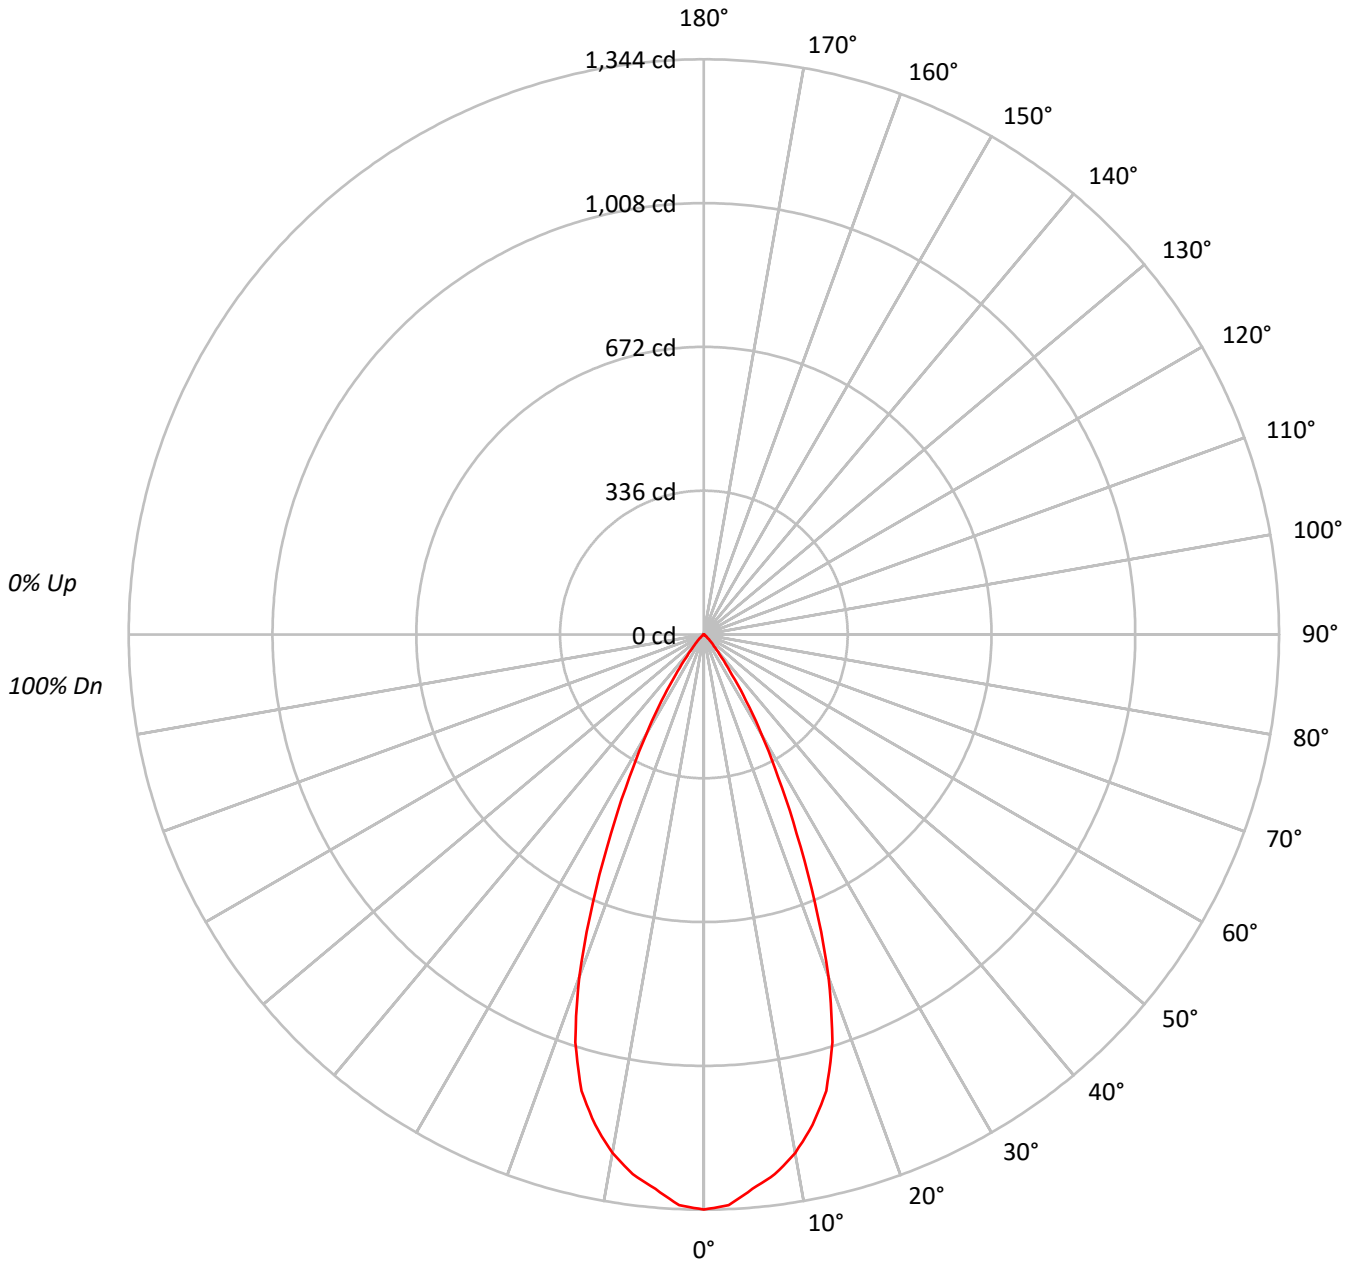



TEST NUMBER: P759401

CATALOG NUMBER: LD6D08D010-EU6DR450210IC9027-6LBS1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	98	98	97	95			95
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	91	90			90
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	89	87	85			85
4	100	94	89	85	99	93	88	85	91	87	84	89	86	83	87	84	82	81			81
5	96	89	84	80	95	88	83	80	86	82	79	85	81	79	83	80	78	77			77
6	92	85	80	76	91	84	79	76	83	78	75	81	77	75	80	77	74	73			73
7	89	81	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	69			69
8	85	77	72	68	84	76	71	68	75	71	68	74	70	67	73	70	67	66			66
9	82	73	68	65	81	73	68	65	72	68	65	71	67	64	71	67	64	63			63
10	79	70	65	62	78	70	65	62	69	65	62	68	64	61	68	64	61	60			60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	146814
5°	142625
10°	136464
15°	124890
20°	99076
25°	61857
30°	34102
35°	15312
40°	6033
45°	2843
50°	1343
55°	705
60°	350
65°	78
70°	32
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2843 cd/sqm



TEST NUMBER: P759401

CATALOG NUMBER: LD6D08D010-EU6DR450210IC9027-6LBS1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	122.2	16.1
10°-20°	300.7	39.6
20°-30°	238.1	31.3
30°-40°	79.3	10.4
40°-50°	15.8	2.1
50°-60°	3.6	0.5
60°-70°	0.5	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	661.1	87.0
0°-40°	740.4	97.4
0°-60°	759.7	99.9
0°-90°	760.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	760.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1344	
5°	1300	122
15°	1104	301
25°	513	238
35°	115	79
45°	18	16
55°	4	4
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P759401
CATALOG NUMBER: LD6D08D010-EU6DR450210IC9027-6LBS1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	1343.7
2.5°	1334.9
5°	1300.4
7.5°	1272.0
10°	1230.0
12.5°	1173.9
15°	1104.1
17.5°	999.1
20°	852.1
22.5°	677.1
25°	513.1
27.5°	375.7
30°	270.3
32.5°	183.8
35°	114.8
37.5°	68.1
40°	42.3
42.5°	27.8
45°	18.4
47.5°	11.9
50°	7.9
52.5°	5.3
55°	3.7
57.5°	2.4
60°	1.6
62.5°	0.9
65°	0.3
67.5°	0.1
70°	0.1
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)