

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P772384

Luminaire Tested: LD6D80BD010-EU6DR6570959024-6LBS1LI

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P772384
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D80BD010-EU6DR6570959024-6LBS1LI
Description: 6 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8021.1 lumens
Efficiency: N/A
Efficacy: 101.7 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 78.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P772384

CATALOG NUMBER: LD6D80BD010-EU6DR6570959024-6LBS1LI

Luminous Intensity Polar Plot

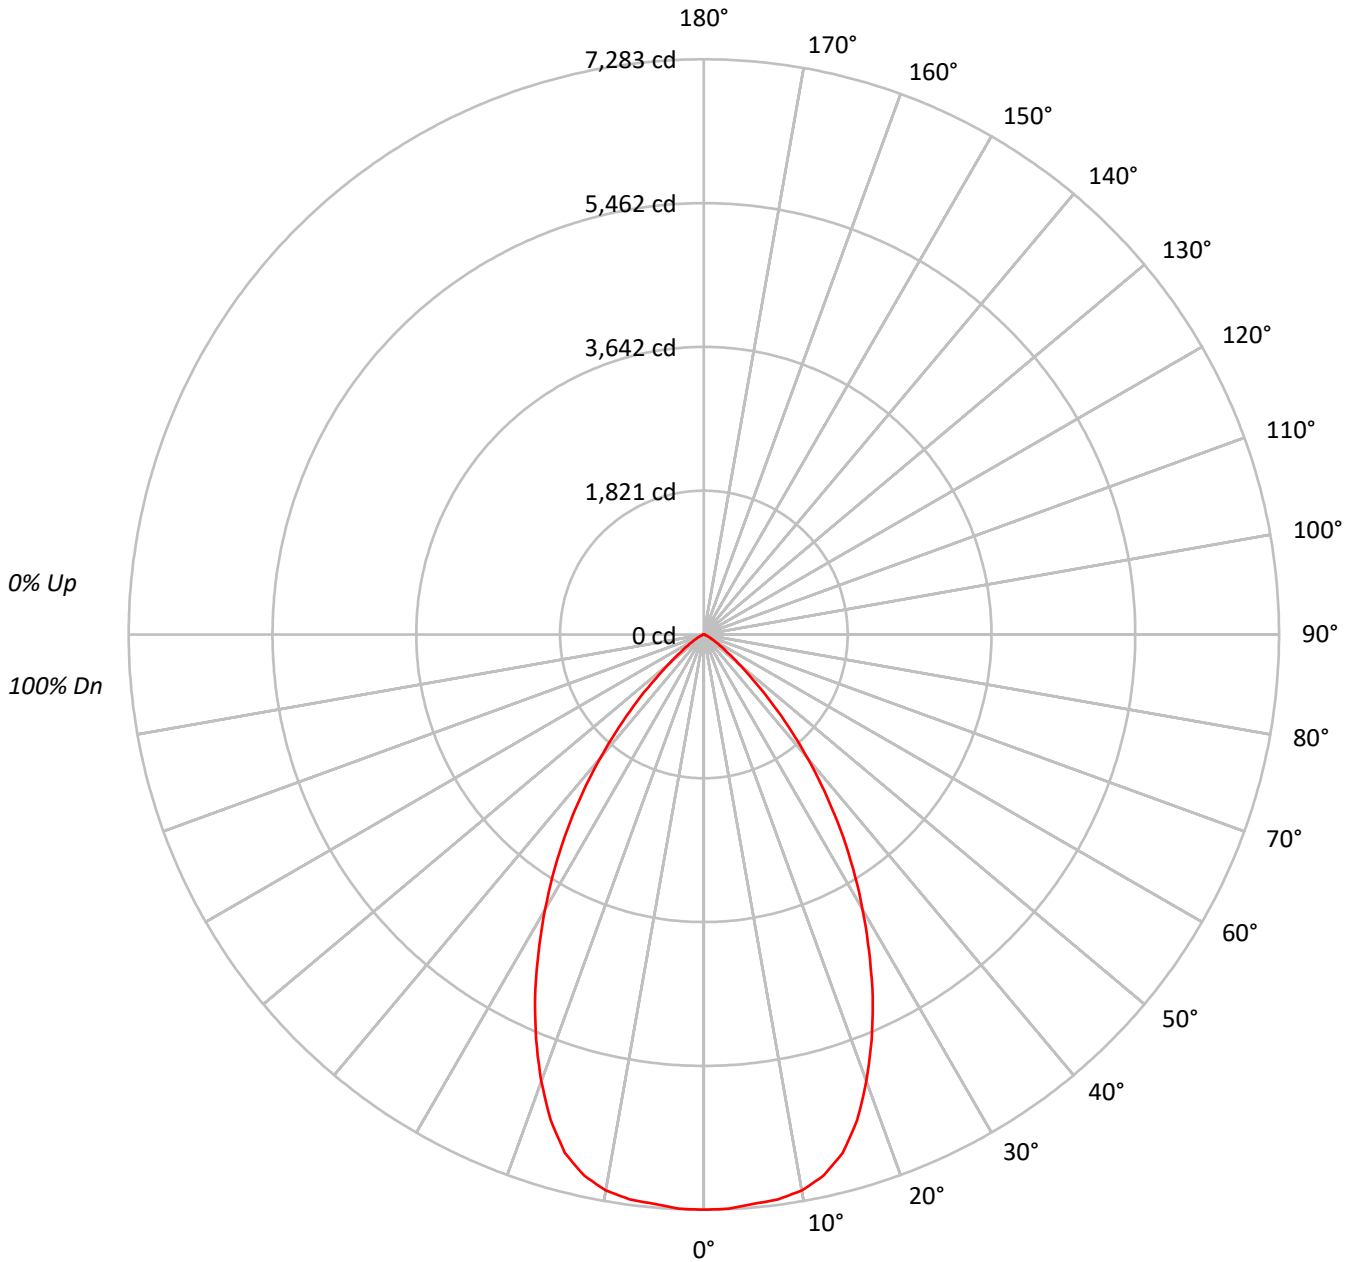



TEST NUMBER: P772384

CATALOG NUMBER: LD6D80BD010-EU6DR6570959024-6LBS1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	425350
5°	424277
10°	423917
15°	410848
20°	374025
25°	325939
30°	271091
35°	214799
40°	155028
45°	97942
50°	51054
55°	27136
60°	14251
65°	7836
70°	3296
75°	3633
80°	2523
85°	2144

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 97942 cd/sqm



TEST NUMBER: P772384

CATALOG NUMBER: LD6D80BD010-EU6DR6570959024-6LBS1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	688.7	8.6
10°-20°	1886.0	23.5
20°-30°	2305.4	28.7
30°-40°	1870.5	23.3
40°-50°	932.1	11.6
50°-60°	260.0	3.2
60°-70°	59.1	0.7
70°-80°	15.4	0.2
80°-90°	3.9	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4880.1	60.8
0°-40°	6750.6	84.2
0°-60°	7942.7	99.0
0°-90°	8021.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	8021.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7283	
5°	7237	689
15°	6795	1886
25°	5058	2305
35°	3013	1871
45°	1186	932
55°	266	260
65°	57	59
75°	16	15
85°	3	4
90°	0	



TEST NUMBER: P772384

CATALOG NUMBER: LD6D80BD010-EU6DR6570959024-6LBS1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	7282.9
2.5°	7277.6
5°	7236.9
7.5°	7213.4
10°	7148.1
12.5°	7015.4
15°	6794.9
17.5°	6450.3
20°	6017.9
22.5°	5551.3
25°	5057.9
27.5°	4530.3
30°	4019.8
32.5°	3515.7
35°	3012.7
37.5°	2510.8
40°	2033.4
42.5°	1586.1
45°	1185.8
47.5°	826.2
50°	561.9
52.5°	387.4
55°	266.5
57.5°	179.8
60°	122.0
62.5°	84.5
65°	56.7
67.5°	28.9
70°	19.3
72.5°	18.2
75°	16.1
77.5°	10.7
80°	7.5
82.5°	5.4
85°	3.2
87.5°	2.1
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)