

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P771963

Luminaire Tested: LD6D80BD010-EU6DR3570959040-6LBDP1H

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P771963  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D80BD010-EU6DR3570959040-6LBDP1H  
Description: 6 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 35° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 9765.4 lumens  
Efficiency: N/A  
Efficacy: 123.8 lumens/watt  
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 78.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P771963  
CATALOG NUMBER: LD6D80BD010-EU6DR3570959040-6LBDP1H

### Luminous Intensity Polar Plot

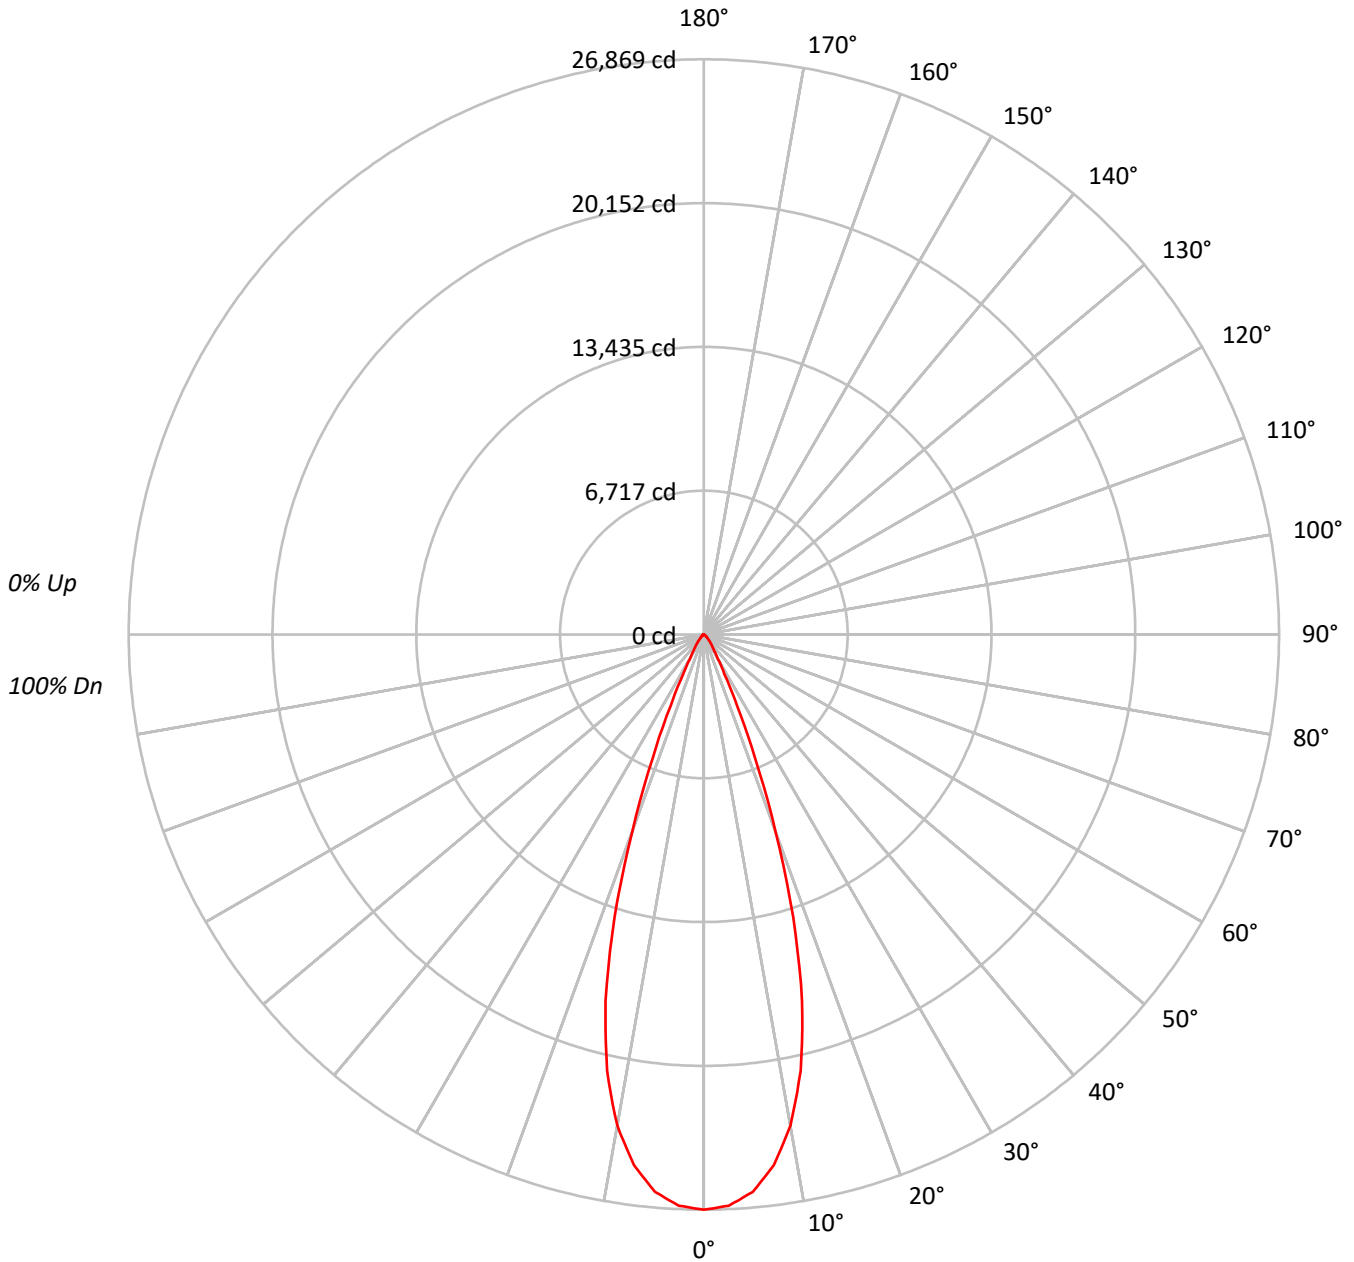



TEST NUMBER: P771963  
 CATALOG NUMBER: LD6D80BD010-EU6DR3570959040-6LBDP1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96																			
2	110	106	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92																			
3	106	101	97	94	105	100	96	93	97	95	92	95	93	91	93	91	89	88																			
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84																			
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81																			
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78																			
7	93	85	81	78	91	85	80	77	84	80	77	83	79	77	82	79	76	75																			
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72																			
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70																			
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	2935749
5°	2866767
10°	2583717
15°	2005383
20°	1137416
25°	442513
30°	165085
35°	90487
40°	59149
45°	36003
50°	22913
55°	16192
60°	11844
65°	6437
70°	479
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 36003 cd/sqm



TEST NUMBER: P771963

CATALOG NUMBER: LD6D80BD010-EU6DR3570959040-6LBDP1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	2403.9	24.6
10°-20°	4693.5	48.1
20°-30°	1914.2	19.6
30°-40°	458.1	4.7
40°-50°	190.9	2.0
50°-60°	79.0	0.8
60°-70°	24.7	0.3
70°-80°	0.6	0.0
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	9011.6	92.3
0°-40°	9469.7	97.0
0°-60°	9739.6	99.7
0°-90°	9765.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	9765.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	26869	
5°	26138	###
15°	17729	4694
25°	3671	1914
35°	678	458
45°	233	191
55°	85	79
65°	25	25
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P771963

CATALOG NUMBER: LD6D80BD010-EU6DR3570959040-6LBDP1H

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	26869.2
2.5°	26708.0
5°	26138.0
7.5°	25001.0
10°	23288.0
12.5°	20876.1
15°	17728.7
17.5°	13879.3
20°	9782.3
22.5°	6237.8
25°	3670.6
27.5°	2074.9
30°	1308.5
32.5°	918.7
35°	678.4
37.5°	524.6
40°	414.7
42.5°	319.4
45°	233.0
47.5°	174.4
50°	134.8
52.5°	107.0
55°	85.0
57.5°	68.9
60°	54.2
62.5°	39.6
65°	24.9
67.5°	8.8
70°	1.5
72.5°	1.5
75°	0.0
77.5°	0.0
80°	0.0
82.5°	1.5
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)