

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P760822

Luminaire Tested: LD6D10D010-EU6DR700210IC9030-6LBSQW1B

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P760822  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D10D010-EU6DR700210IC9030-6LBSQW1B  
Description: 6 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 70° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 648.0 lumens  
Efficiency: N/A  
Efficacy: 55.4 lumens/watt  
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 11.7  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P760822  
CATALOG NUMBER: LD6D10D010-EU6DR700210IC9030-6LBSQW1B

### Luminous Intensity Polar Plot

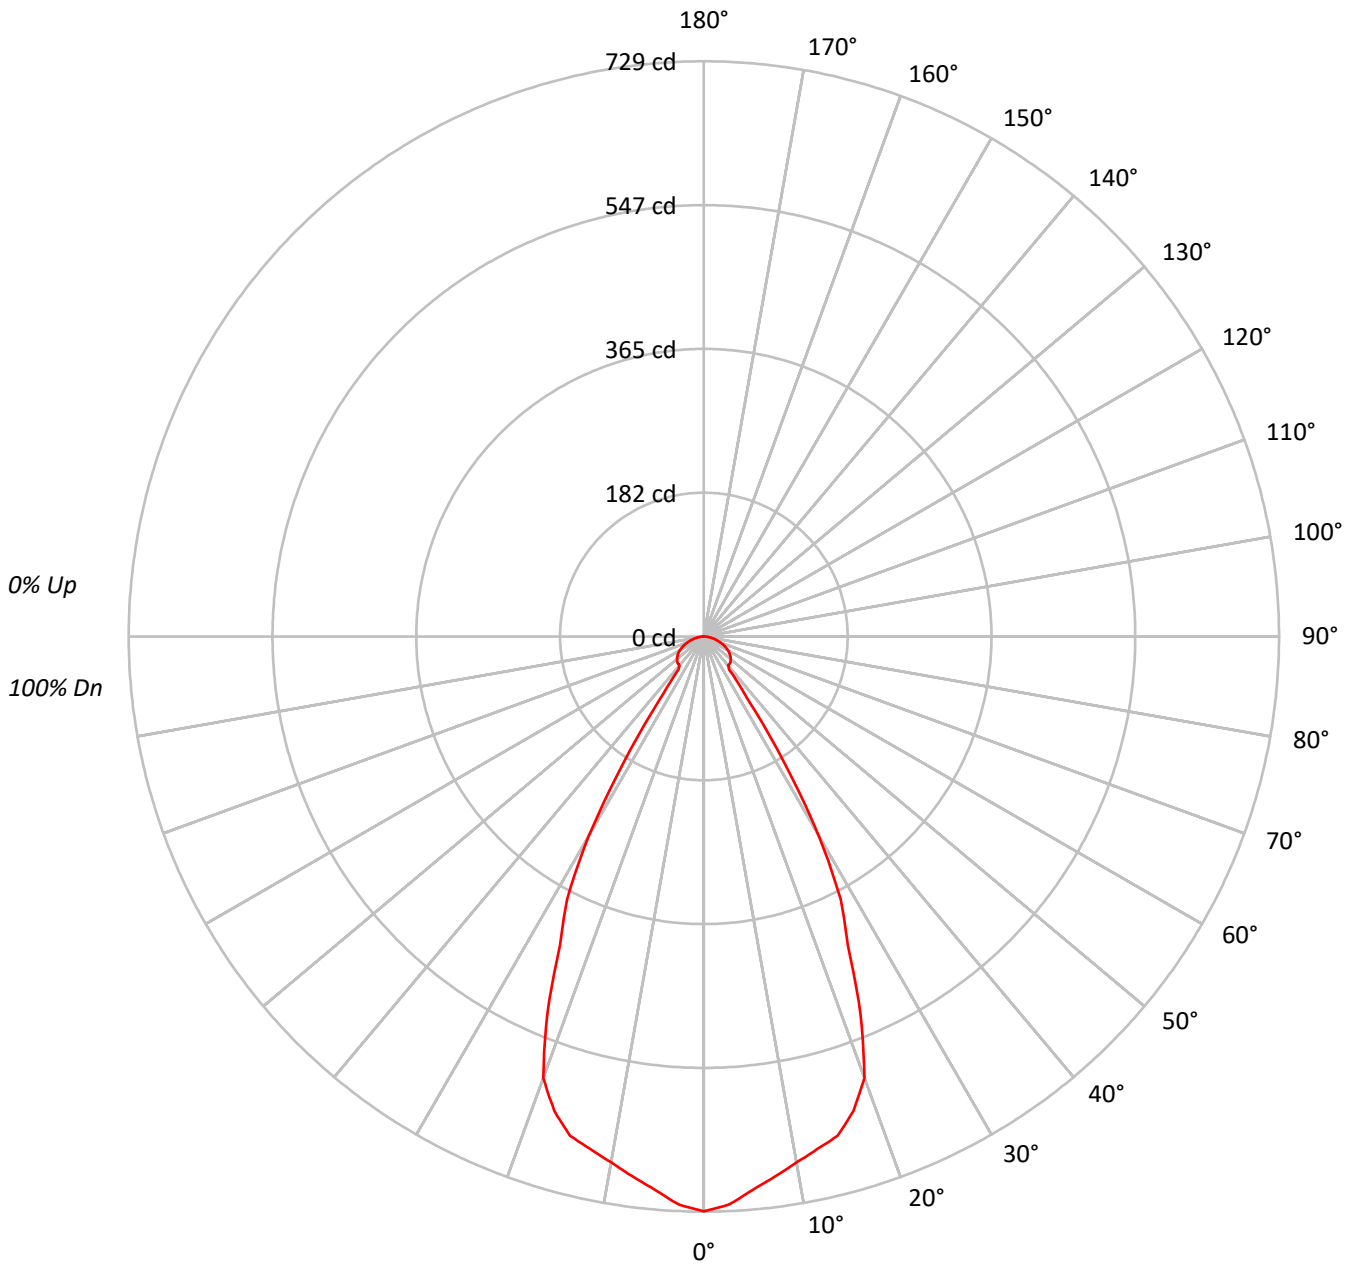



TEST NUMBER: P760822

CATALOG NUMBER: LD6D10D010-EU6DR700210IC9030-6LBSQW1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70																			
5	89	80	74	69	88	79	73	69	77	72	68	75	71	67	74	70	67	65																			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53																			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50																			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	79607
5°	77246
10°	75088
15°	74102
20°	69194
25°	51984
30°	36751
35°	13018
40°	6846
45°	7293
50°	7547
55°	7696
60°	7736
65°	7575
70°	7156
75°	6628
80°	5852
85°	4764

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 60°  
 Luminance: 7736 cd/sqm



TEST NUMBER: P760822

CATALOG NUMBER: LD6D10D010-EU6DR700210IC9030-6LBSQW1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	66.4	10.3
10°-20°	182.2	28.1
20°-30°	200.7	31.0
30°-40°	76.7	11.8
40°-50°	36.2	5.6
50°-60°	36.0	5.6
60°-70°	28.8	4.4
70°-80°	16.5	2.6
80°-90°	4.5	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	449.3	69.3
0°-40°	526.0	81.2
0°-60°	598.2	92.3
0°-90°	648.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	648.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	729	
5°	704	66
15°	655	182
25°	431	201
35°	98	77
45°	47	36
55°	40	36
65°	29	29
75°	16	17
85°	4	5
90°	0	



TEST NUMBER: P760822

CATALOG NUMBER: LD6D10D010-EU6DR700210IC9030-6LBSQW1B

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	728.6
2.5°	720.9
5°	704.3
7.5°	690.3
10°	676.8
12.5°	665.4
15°	655.1
17.5°	630.3
20°	595.1
22.5°	519.2
25°	431.2
27.5°	375.3
30°	291.3
32.5°	188.2
35°	97.6
37.5°	52.7
40°	48.0
42.5°	47.7
45°	47.2
47.5°	46.1
50°	44.4
52.5°	42.5
55°	40.4
57.5°	38.0
60°	35.4
62.5°	32.4
65°	29.3
67.5°	25.8
70°	22.4
72.5°	18.9
75°	15.7
77.5°	12.3
80°	9.3
82.5°	6.6
85°	3.8
87.5°	1.5
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)