

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P761182

Luminaire Tested: LD6D15D010-EU6DR300215IC9027-6LBCSSQMW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P761182  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D15D010-EU6DR300215IC9027-6LBCSSQMW  
Description: 6 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 30° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1206.3 lumens  
Efficiency: N/A  
Efficacy: 76.3 lumens/watt  
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49  
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')  
CIE Type: Direct

Input Watts (W): 15.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P761182

CATALOG NUMBER: LD6D15D010-EU6DR300215IC9027-6LBCSSQMW

### Luminous Intensity Polar Plot

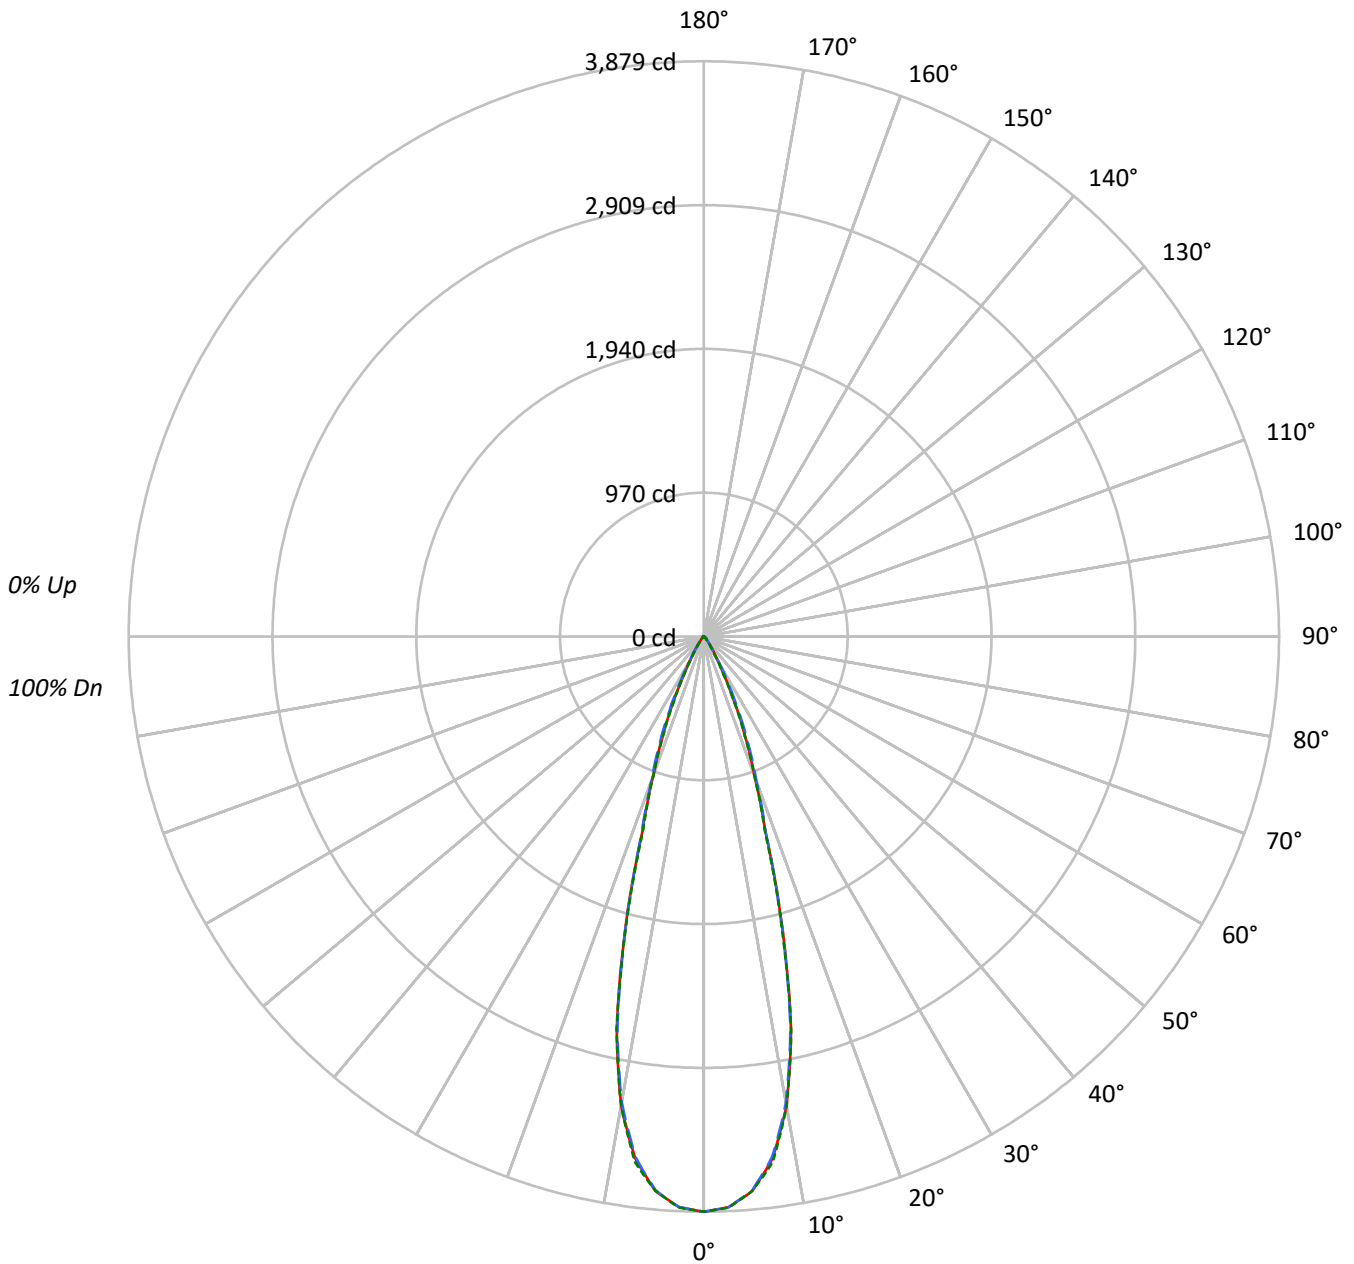



TEST NUMBER: P761182

CATALOG NUMBER: LD6D15D010-EU6DR300215IC9027-6LBCSSQMW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	296904	296904	296904
5°	288380	288050	288395
10°	249782	248018	249720
15°	162972	162093	161276
20°	81040	84079	80934
25°	40818	46029	39982
30°	16342	17810	14239
35°	7578	7260	6083
40°	3277	3637	3078
45°	2306	2869	2327
50°	786	2084	834
55°	454	867	480
60°	321	383	321
65°	199	199	199
70°	134	90	134
75°	0	59	0
80°	0	0	0
85°	0	0	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 22.5°  
 Vertical Angle: 45°  
 Luminance: 2869 cd/sqm



TEST NUMBER: P761182

CATALOG NUMBER: LD6D15D010-EU6DR300215IC9027-6LBCSSQMW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	341.1	28.3
10°-20°	549.3	45.5
20°-30°	237.4	19.7
30°-40°	54.1	4.5
40°-50°	18.6	1.5
50°-60°	4.5	0.4
60°-70°	1.2	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1127.8	93.5
0°-40°	1181.9	98.0
0°-60°	1205.0	99.9
0°-90°	1206.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1206.3	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	3879	3879	3879	3879	3879	
5°	3753	3750	3749	3757	3753	341
15°	2057	2032	2046	2039	2035	551
25°	483	502	545	489	473	231
35°	81	83	78	77	65	55
45°	21	26	26	26	22	15
55°	3	4	6	4	4	3
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P761182

CATALOG NUMBER: LD6D15D010-EU6DR300215IC9027-6LBCSSQMW

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	3878.9	3878.9	3878.9	3878.9	3878.9
2.5°	3853.2	3850.5	3852.1	3854.0	3854.8
5°	3753.2	3749.6	3748.9	3756.7	3753.4
7.5°	3551.6	3546.4	3538.6	3556.3	3572.9
10°	3213.7	3208.0	3191.0	3199.4	3212.9
12.5°	2714.9	2696.5	2696.1	2722.7	2719.1
15°	2056.6	2031.8	2045.5	2038.8	2035.2
17.5°	1383.0	1373.5	1391.8	1386.3	1362.4
20°	994.9	997.3	1032.2	1014.7	993.6
22.5°	726.0	734.9	776.2	731.1	714.5
25°	483.3	501.6	545.0	488.8	473.4
27.5°	297.3	305.7	349.7	293.5	285.1
30°	184.9	180.7	201.5	172.9	161.1
32.5°	121.3	116.0	122.7	110.1	100.6
35°	81.1	82.8	77.7	77.1	65.1
37.5°	50.6	58.3	51.4	54.8	41.9
40°	32.8	42.3	36.4	40.2	30.8
42.5°	26.9	32.5	29.9	31.8	27.4
45°	21.3	26.5	26.5	26.5	21.5
47.5°	11.8	17.7	22.7	18.1	12.5
50°	6.6	8.9	17.5	9.3	7.0
52.5°	4.6	5.2	12.0	5.3	4.8
55°	3.4	3.6	6.5	3.8	3.6
57.5°	2.7	2.9	3.4	2.9	2.7
60°	2.1	2.1	2.5	2.3	2.1
62.5°	1.5	1.5	1.7	1.5	1.5
65°	1.1	1.1	1.1	1.1	1.1
67.5°	0.6	0.7	0.7	0.7	0.7
70°	0.6	0.4	0.4	0.4	0.6
72.5°	0.4	0.2	0.2	0.2	0.2
75°	0.0	0.0	0.2	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report







— 0°-180°    - - 45°-225°    - - - - 90°-270°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)