

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P757705

Luminaire Tested: LD6D02D010-EU6DR650210IC9035-6LBCSSQMMS

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P757705
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D02D010-EU6DR650210IC9035-6LBCSSQMMS
Description: 6 INCH SQAURE SHALLOW CAST MATTE METALLIC SILVER TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 336.7 lumens
Efficiency: N/A
Efficacy: 66.0 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 5.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P757705
CATALOG NUMBER: LD6D02D010-EU6DR650210IC9035-6LBCSSQMMS

Luminous Intensity Polar Plot

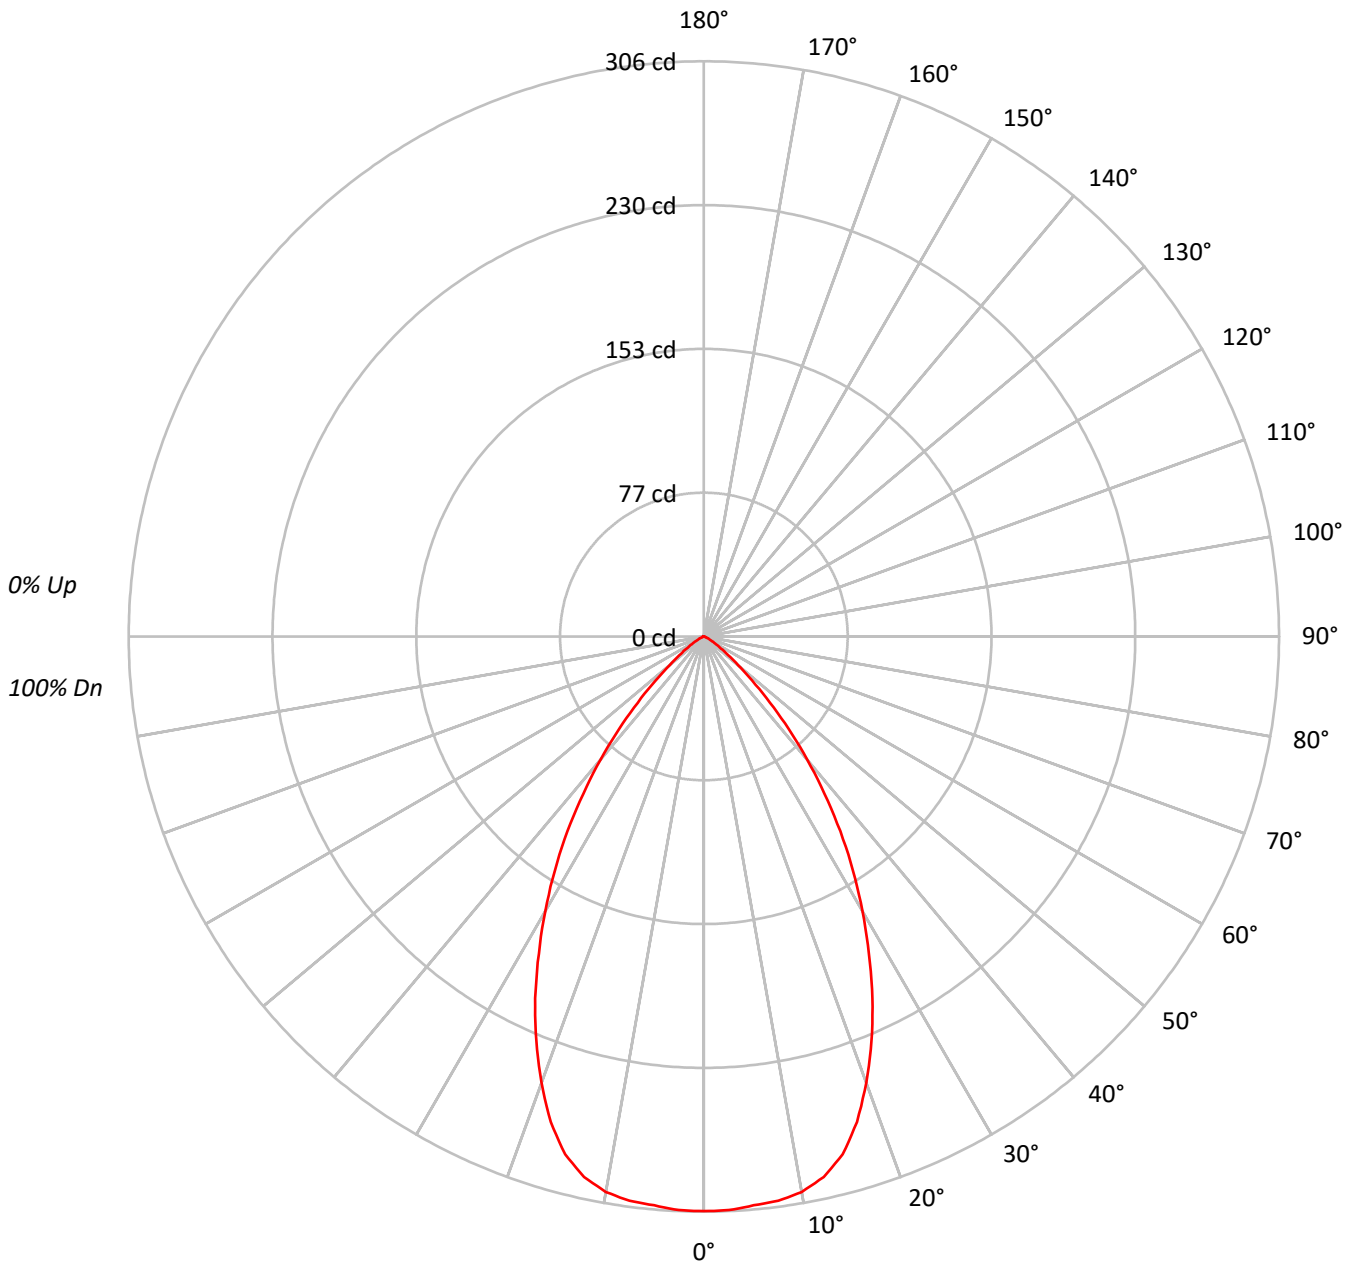



TEST NUMBER: P757705

CATALOG NUMBER: LD6D02D010-EU6DR650210IC9035-6LBCSSQMMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93																			
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85																			
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78																			
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72																			
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66																			
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61																			
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56																			
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52																			
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49																			
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	17854
5°	17811
10°	17797
15°	17244
20°	15700
25°	13681
30°	11377
35°	9019
40°	6511
45°	4113
50°	2144
55°	1140
60°	596
65°	332
70°	137
75°	158
80°	101
85°	67

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 4113 cd/sqm



TEST NUMBER: P757705

CATALOG NUMBER: LD6D02D010-EU6DR650210IC9035-6LBCSSQMMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	28.9	8.6
10°-20°	79.2	23.5
20°-30°	96.8	28.7
30°-40°	78.5	23.3
40°-50°	39.1	11.6
50°-60°	10.9	3.2
60°-70°	2.5	0.7
70°-80°	0.6	0.2
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	204.9	60.8
0°-40°	283.4	84.2
0°-60°	333.5	99.0
0°-90°	336.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	336.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	306	
5°	304	29
15°	285	79
25°	212	97
35°	126	79
45°	50	39
55°	11	11
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P757705
CATALOG NUMBER: LD6D02D010-EU6DR650210IC9035-6LBCSSQMMS

CANDELA DISTRIBUTION (FULL):

	0°
0°	305.7
2.5°	305.5
5°	303.8
7.5°	302.8
10°	300.1
12.5°	294.5
15°	285.2
17.5°	270.8
20°	252.6
22.5°	233.0
25°	212.3
27.5°	190.2
30°	168.7
32.5°	147.6
35°	126.5
37.5°	105.4
40°	85.4
42.5°	66.6
45°	49.8
47.5°	34.7
50°	23.6
52.5°	16.3
55°	11.2
57.5°	7.6
60°	5.1
62.5°	3.6
65°	2.4
67.5°	1.2
70°	0.8
72.5°	0.7
75°	0.7
77.5°	0.5
80°	0.3
82.5°	0.2
85°	0.1
87.5°	0.1
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)